



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Antenna ANT060 with an Adaptor Cable

ANT060 Antenna





ANT060 antenna can be used with Fanstel module with an u.FL connector. It consists of:

- an antenna with an SMA connector and + 6 dBi gain
- an SMA connector to u.FL connector adaptor cable.
- panel mounting hardware at SMA connector side of adaptor cable.



Specifications

- Frequency range: 2400 to 2500 MHz.
- Gain: 6 dBi
- Impedance: 50 ohm
- Max power: 10W
- Antenna size: 195mm x 13mm
- Adaptor cable size: 100mm x 9mm.
- Shell material: ABS
- Operating temperature: -30° C to + 60° C.

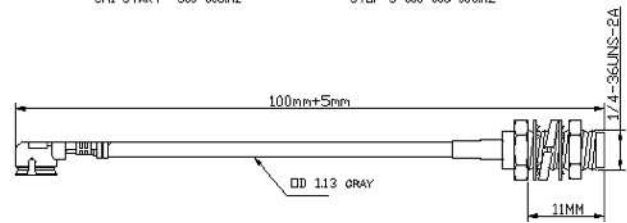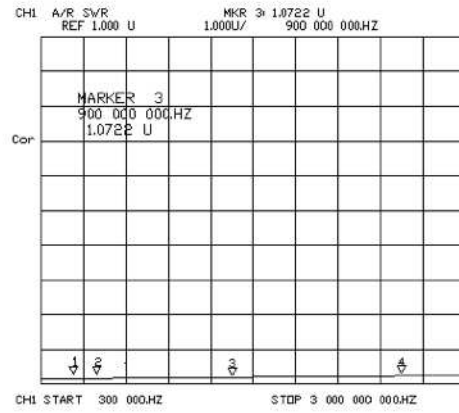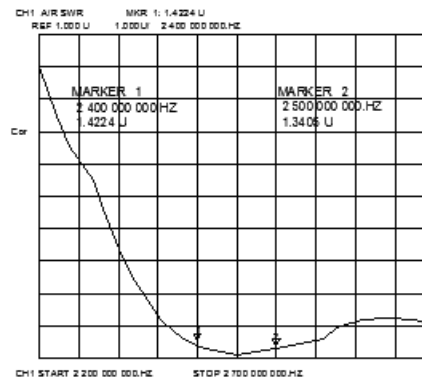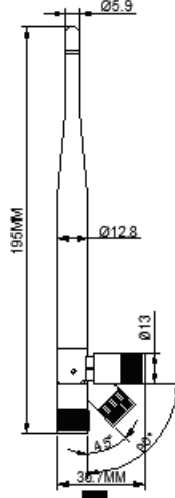

Performance parameters	
Model Type	ANT060
Frequency Range	2400-2500MHz
Band Width	100MHz
Gain	6dbi
Vswr	≤ 2.0
Impedance	50 OHM
Polarization	VERTICAL
Radiation	OMNIDIRECTIONAL
Max power	10 W
CABLE	-----
Dimensions	195mm*13mm
Shell material	ABS
Connector	SMA
Temperature	-30° -- 70°
Weight	

Specifications	
Product name	Adaptor Cable
Model Type	SMA101
Frequency Range	0-3GMHZ
Band Width	3000MHz
Vswr	≤1.2
Cable	OD 1.13
Impedance	50 OHM
Polarization	----
Radiation	----
Max power	20 W
Connector	SMA-K / IPEX
Dimensions	100MM*9mm
Shell material	copper & plastic
Installation	screw
Temperature	-30° -- 60°
Weight	4.5g

Descriptions
An easy to mount adapter cable between SMA and UFL connectors