



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DATA SHEET

WIRELESS COMPONENTS

Active Antenna

ANT1212JB27B1575A

GPS

PIN 12 x 12 x 6.5 mm



FEATURES

- Compact size
- High radiation efficiency
- Integrated LNA
- Flexible cable/connector option
- RoHS compliant

APPLICATIONS

- Navigation device
- Telematics box
- Tracker

ORDERING INFORMATION

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

PART NUMBER

ANT I212 J B27 B I575A
(1) (2) (3) (4) (5) (6)

(1) PRODUCT

ANT = Antenna

(2) SIZE

I212 = 12 × 12 mm

(3) ANTENNA TYPE

J = Integrated Antenna

(4) SERIAL NO.

B27

(5) PACKING STYLE

B = Plastic Bag

(6) WORKING FREQUENCY

I575 = 1.575 GHz

PHYCOMP CTC

CAN4313322271581B

I2NC

431332227158

SPECIFICATION

□ Ceramic Patch antenna


DESCRIPTION	VALUE
Dimension	12×12×4 mm ³
Centre Frequency	1575 ± 2MHz
Bandwidth	12 MHz (Typ.)
Gain	-4.56 dBic (Typ.)
VSWR	1.5 Max.
Polarization	Right Hand Circular Polarization
Impedance	50Ω

□ LNA

DESCRIPTION	VALUE
Central Frequency	1575 ± 1.023MHz
Gain	25 dB (Typ.)
Output VSWR	1.5 Max.
Noise Figure	1.0 dB(Typ.)
SAW Filter (Out of Band Attenuation)	40dB min 0.15 ~ 960MHz
	20dB min 1475~1535MHz
	32dB min 1627~1710MHz
	32dB min 1750~1800MHz
	28dB min 1850~1990MHz
Supply Voltage	3.0 ± 0.3V
Current Consumption	12 mA (Max.)
Output Impedance	50Ω
Operating Temperature	-30 ~ +85 °C
Humidity	< 95%
Storage Temperature	-40 ~ +125 °C

NOTE

1. Based on 12×12 mm² ground plane (with customer's housing)
2. Centre frequency will be offset to working frequency while changes of customer's housing and ground plane.
3. Please contact local sales if you need customized design to gain optimum antenna performance.

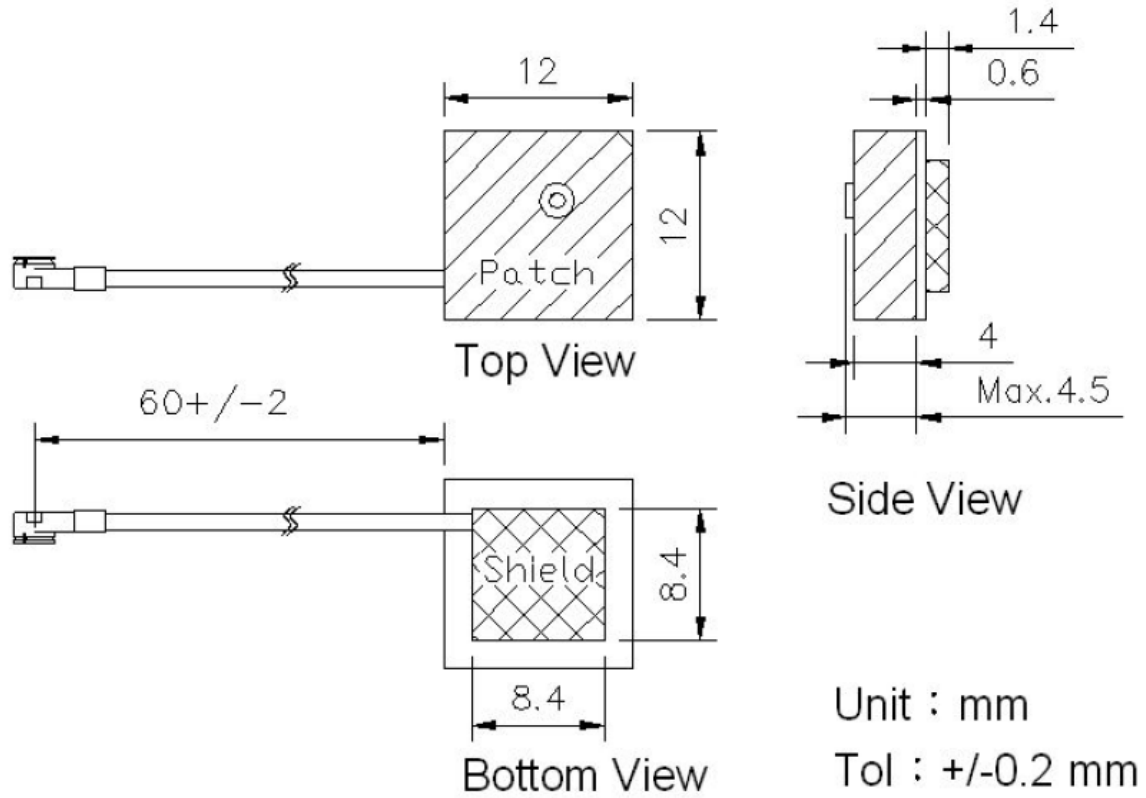

Length	12 +/- 0.2 mm
Width	12 +/- 0.2 mm
Thickness	6.5 ~ 6.8 mm
Cable	Diameter = 1.13 mm ; Length = 60 mm ; Black
Connector	I-PEX or HRS
Shielding Case	8.4 × 8.4 × 1.4 mm ³

Fig. 1 Mechanical Data

REVISION HISTORYREVISION DATE CHANGE NOTIFICATION DESCRIPTION

Version 0	Feb 22, 2013	-	- New data sheet for Active antenna, PIN Feed size 12×12×6.5 mm
-----------	--------------	---	---