



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DATA SHEET

WIRELESS COMPONENTS

Ceramic Chip Antenna

ANT1608LL14R2400A

2.4 - 2.5GHz

I608 Series



FEATURES

- Compact size
- Omni-directional Radiation
- Tape & reel automatic mounting
- Reflow process compatible
- RoHS compliant

APPLICATIONS

- 2.4GHz WiFi device
- Bluetooth gadget
- Zigbee device
- ISM band equipment

ORDERING INFORMATION

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

PART NUMBER

ANT 1608 L L14 R 2400A
 (1) (2) (3) (4) (5) (6)

(1) PRODUCT

ANT = Antenna

(2) SIZE

1608 = 1.6 × 0.8 mm

(3) ANTENNA TYPE

L,F,A = Chip Antenna

(4) SERIAL NO.

L14

(5) PACKING STYLE

R = Tape and Reel

(6) WORKING FREQUENCY

2400 = 2.4GHz

SPECIFICATION

Table 1

DESCRIPTION	VALUE
Working Frequency	2.4 ~ 2.484 GHz
Bandwidth	150 MHz(Typ.)
VSWR	6.0 dB Max
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Peak Gain	2.0 dBi(Typ.)
Impedance	50 Ω
Operating Temperature	- 40~105 °C
Maximum Power	1 W
Termination	Ag (Environmentally-Friendly Leadless)
Resistance to Soldering Heats	260°C , 5sec.

NOTE

I. The specification is defined on Yageo evaluation board

DIMENSIONS

Table 2 Mechanical Dimension

	DIMENSION
L (mm)	1.6 ±0.15
W (mm)	0.8 ±0.15
T (mm)	0.4(max)
A1 (mm)	0.70 ±0.15
A2 (mm)	0.25 ±0.15
B1 (mm)	0.30 ±0.15
B2 (mm)	0.25 ±0.15
C1 (mm)	0.70 ±0.15
C2 (mm)	0.25 ±0.15
G1 (mm)	0.20 ±0.05
G2 (mm)	0.10 ±0.05

Table 3 Termination configuration

TERMINAL NAME	FUNCTION
A1, A2	Soldering Pad
C1, C2	Feeding Pad

OUTLINES

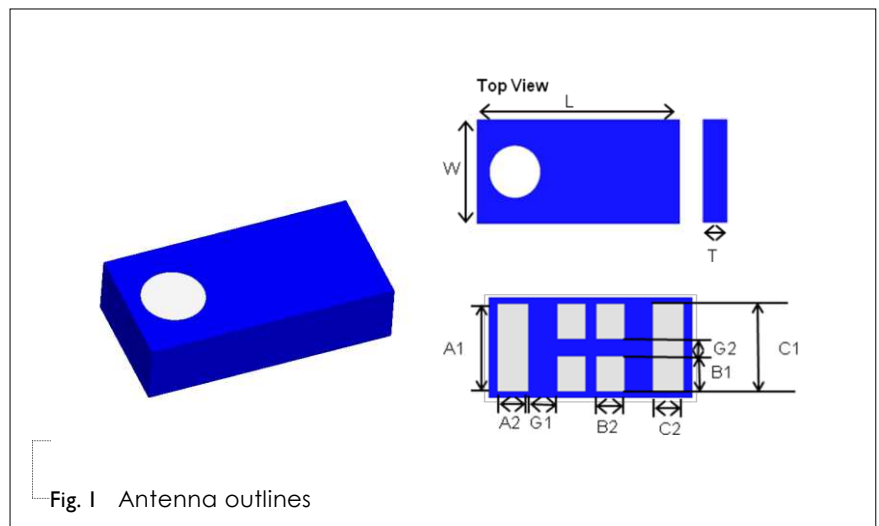


Fig. 1 Antenna outlines

REFERENCE DESIGN OF EVALUATION BOARD

◇SCENARIO I

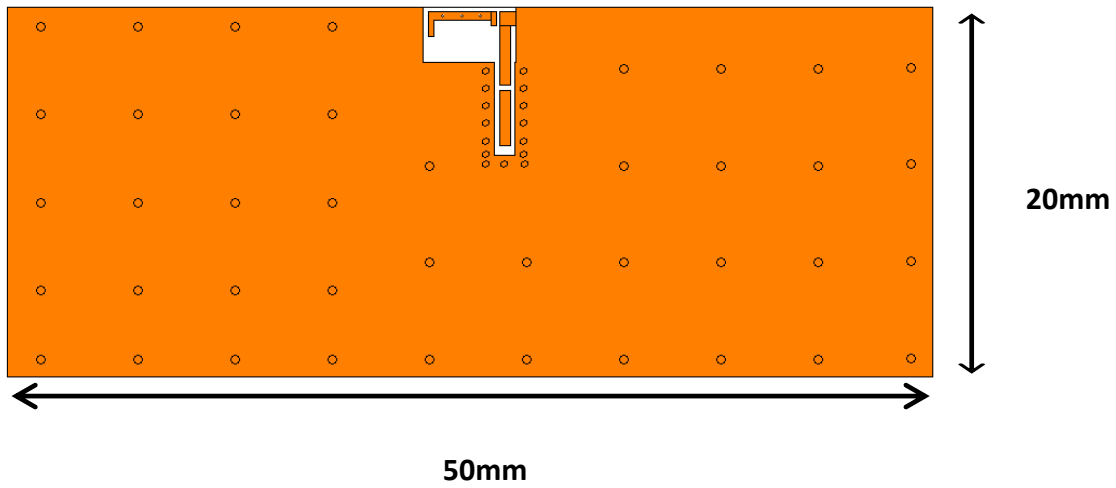


Fig. 2 Outlook and dimension of evaluation board (Scenario 1)

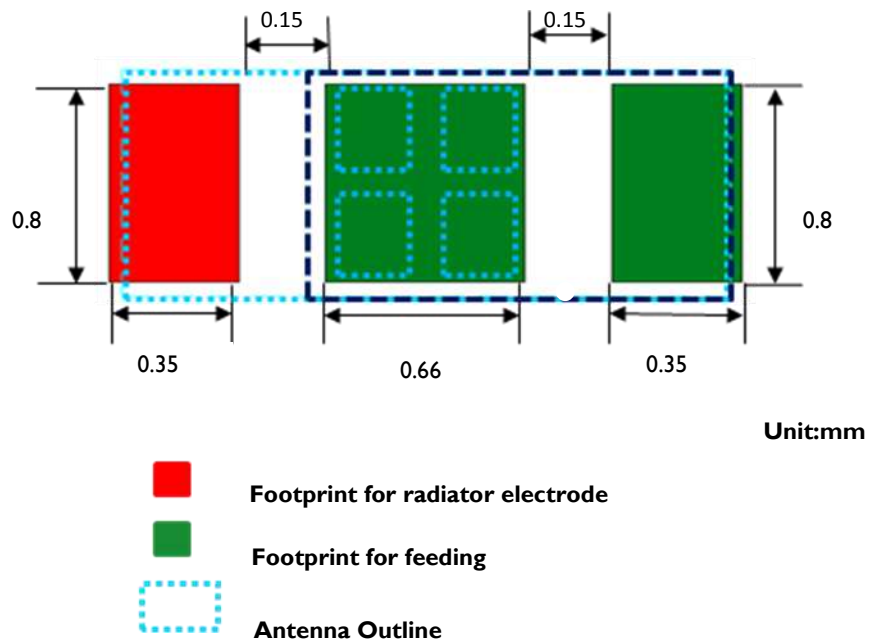


Fig. 3 Footprint

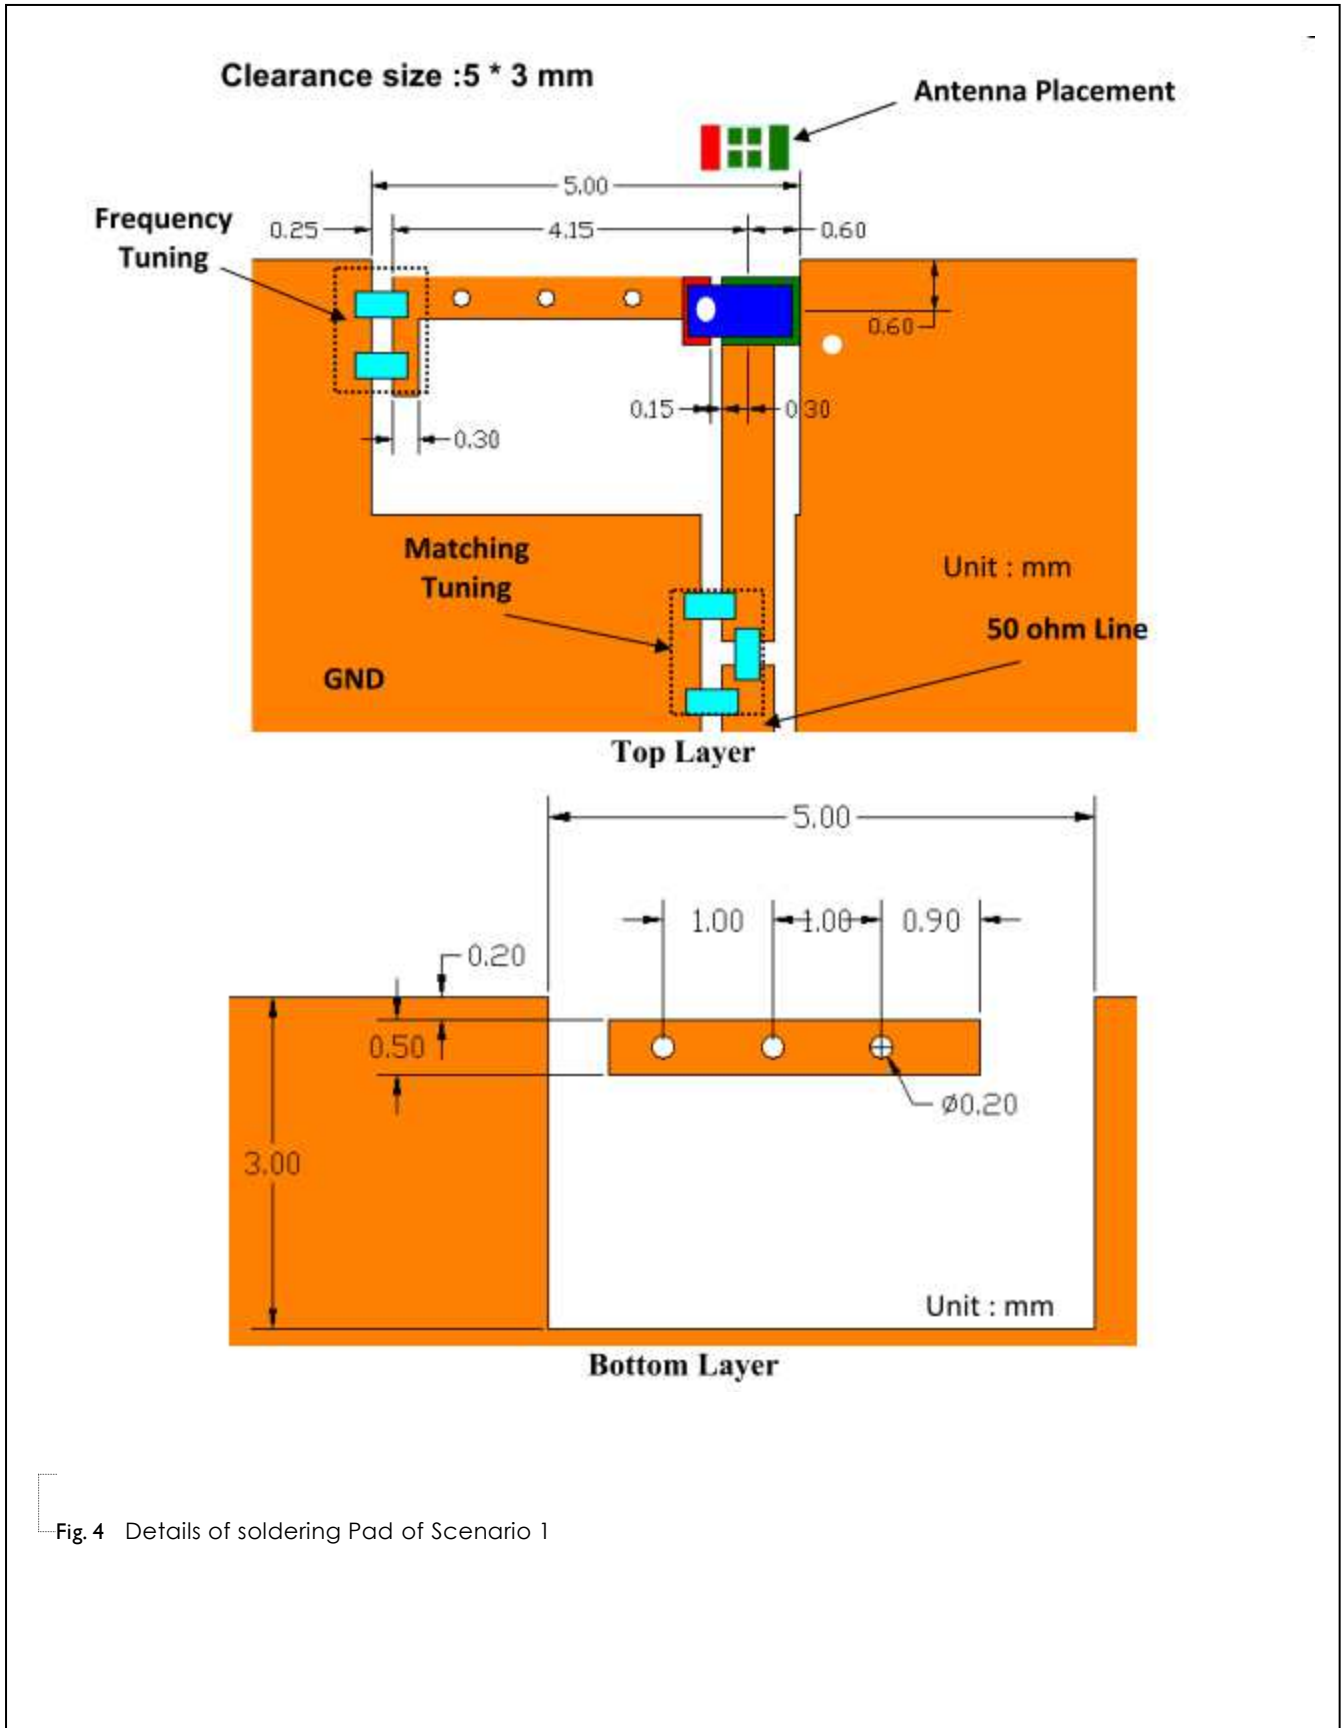


Fig. 4 Details of soldering Pad of Scenario 1

ELECTRICAL PERFORMANCES

◊ SCENARIO 1


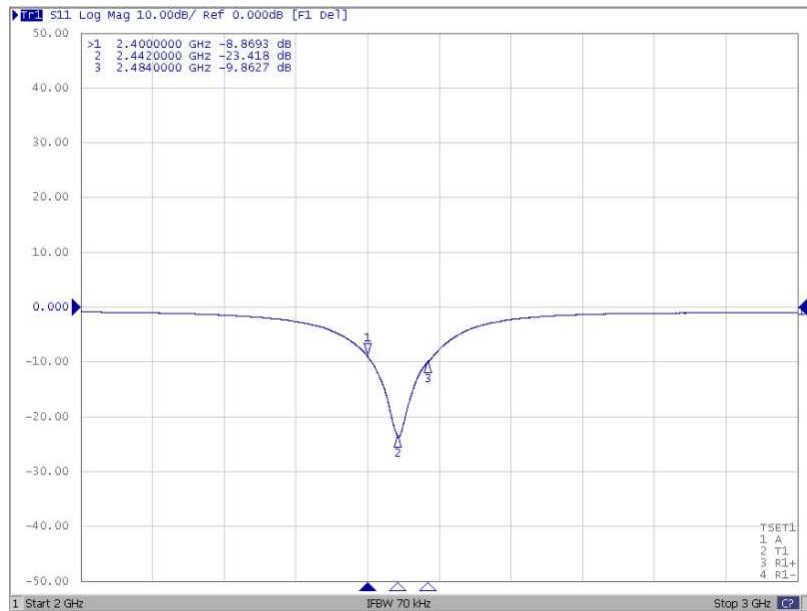


Fig. 5 Return loss of Scenario 1

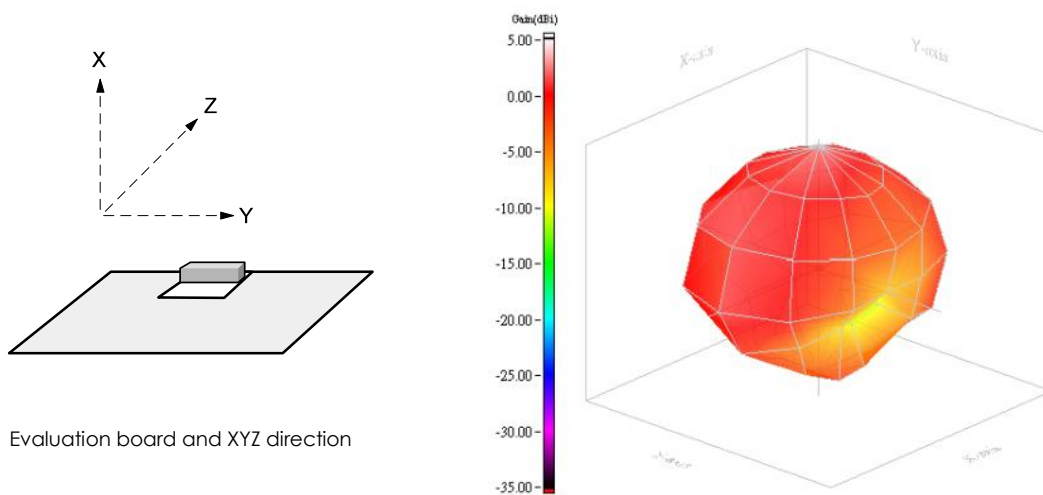

Max Gain = 2.03dBi
Efficiency = -2.08dB, 61.88%

Fig. 6 Radiation pattern of Scenario 1

REFERENCE DESIGN OF EVALUATION BOARD

◇SCENARIO 2

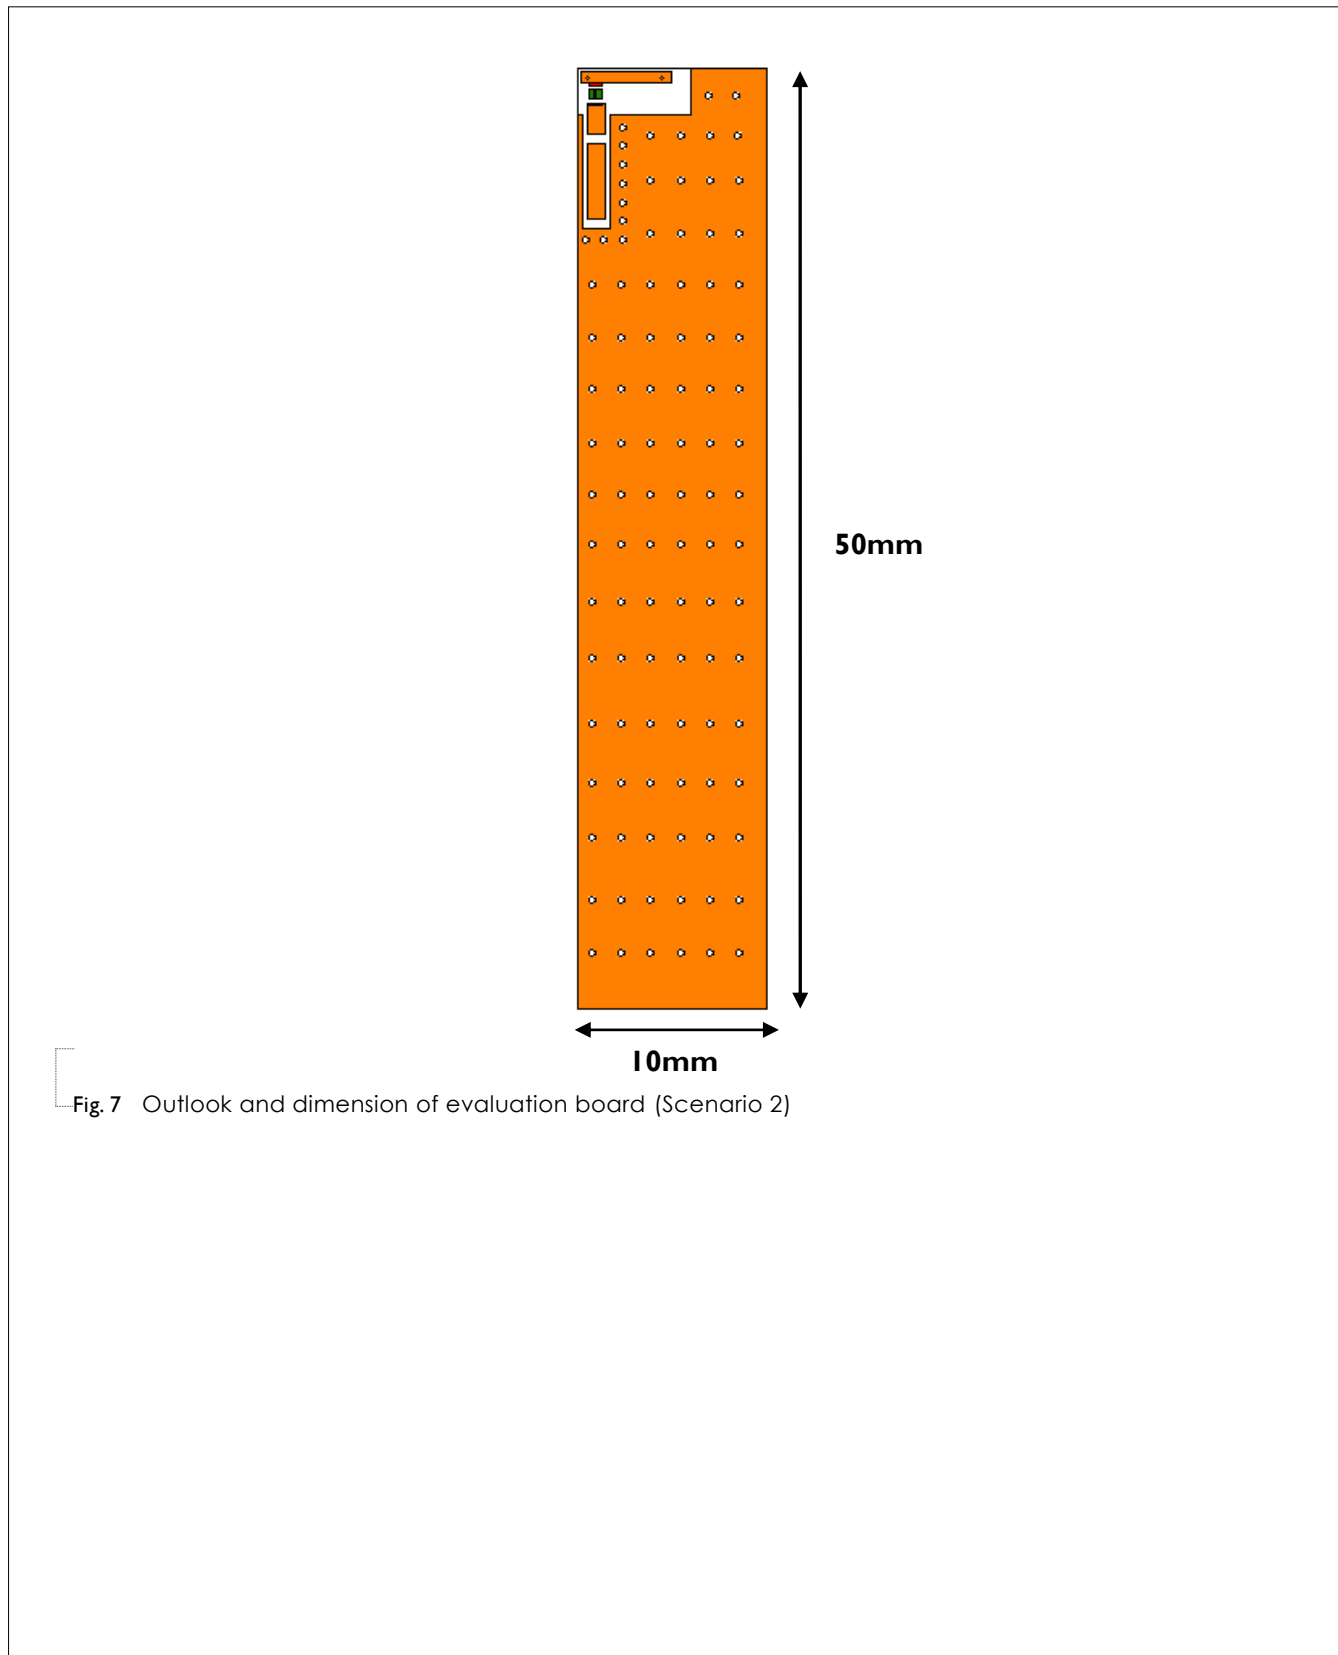


Fig. 7 Outlook and dimension of evaluation board (Scenario 2)

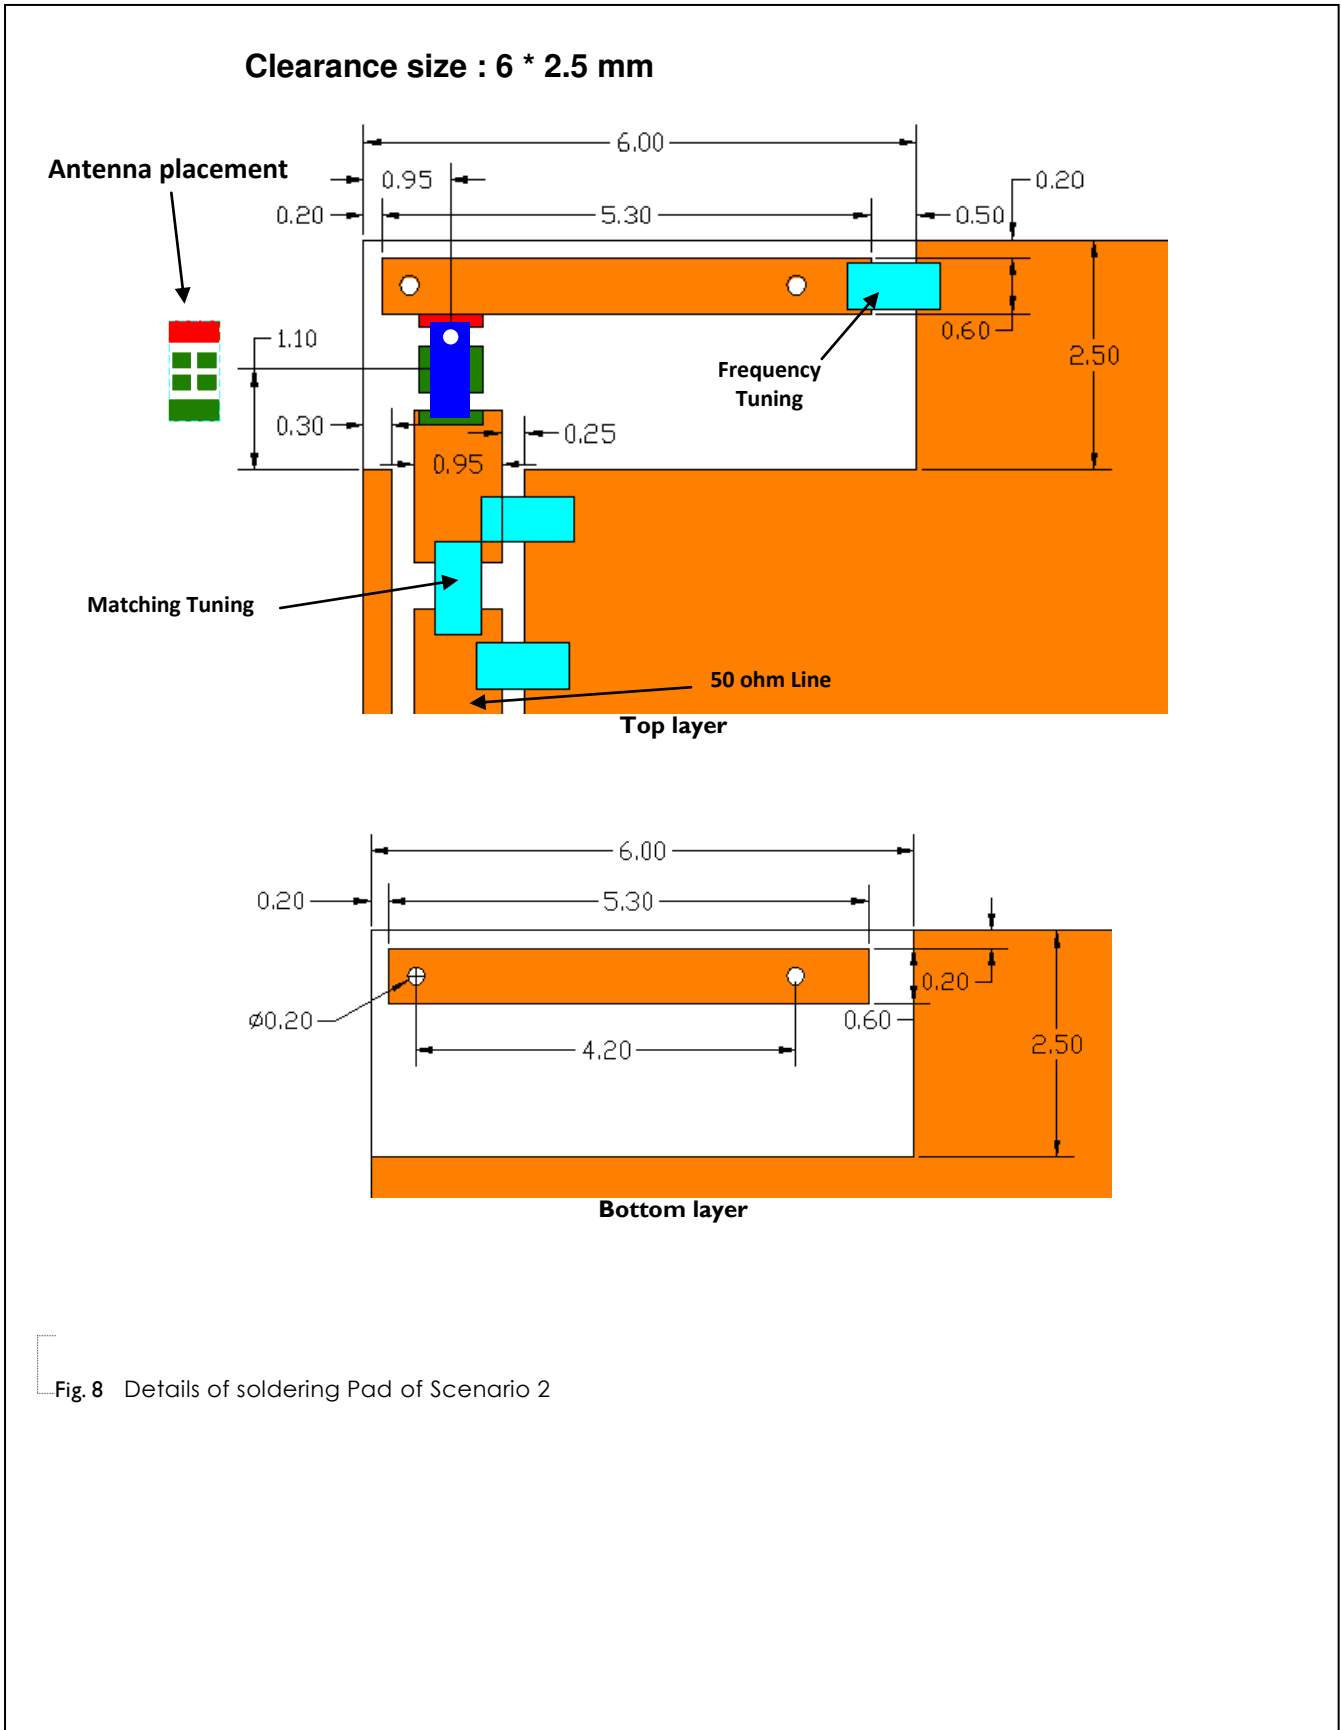


Fig. 8 Details of soldering Pad of Scenario 2

ELECTRICAL PERFORMANCES

◊ **SCENARIO 2**


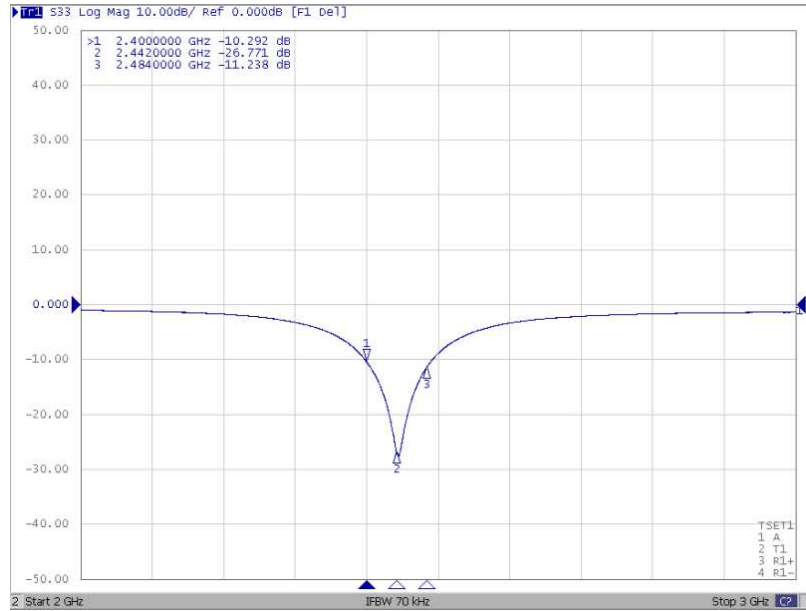


Fig. 9 Return loss of Scenario 2

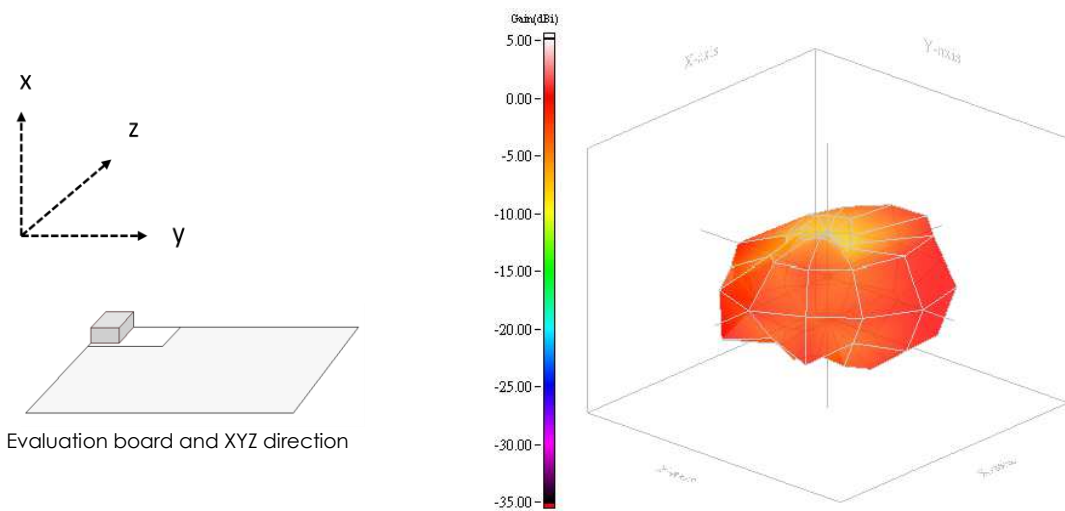

Max Gain = 3.38dBi
Efficiency = -2.17dB, 60.64%

Fig. 10 Radiation pattern of Scenario 2

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 1	Feb. 14, 2017 -	-	Add EV Board Scenario 2 layout and performance data.
Version 0	Oct. 03, 2016 -	-	New data sheet for SMD type antenna, 2.45GHz application, 1608 series PIFA mode