



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**General Description**


- Trench Power MOSFET technology
- Low  $R_{SS(ON)}$
- With ESD protection to improve battery performance and safety
- Common drain configuration for design simplicity
- RoHS and Halogen-Free Compliant

**Applications**

- Battery protection switch
- Mobile device battery charging and discharging

**Product Summary**

$V_{SS}$	12V
$R_{SS(ON)}$ (at $V_{GS}=4.5V$ )	< 3m $\Omega$
$R_{SS(ON)}$ (at $V_{GS}=4.0V$ )	< 3.1m $\Omega$
$R_{SS(ON)}$ (at $V_{GS}=3.8V$ )	< 3.2m $\Omega$
$R_{SS(ON)}$ (at $V_{GS}=3.1V$ )	< 3.5m $\Omega$
$R_{SS(ON)}$ (at $V_{GS}=2.5V$ )	< 4.4m $\Omega$

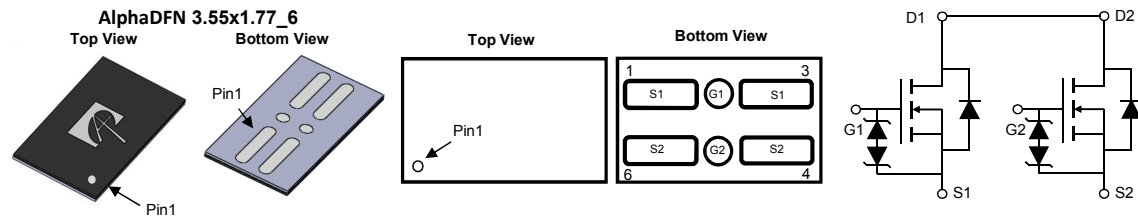**Typical ESD protection**
**HBM Class 2**


Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOC3862	AlphaDFN 3.55x1.77_6	Tape & Reel	5000

**Absolute Maximum Ratings  $T_A=25^\circ C$  unless otherwise noted**

Parameter	Symbol	Rating	Units
Source-Source Voltage	$V_{SS}$	12	V
Gate-Source Voltage	$V_{GS}$	$\pm 8$	V
Source Current(DC) <sup>Note1</sup>	$I_S$	27	A
Source Current(Pulse) <sup>Note2</sup>	$I_{SM}$	100	
Power Dissipation <sup>Note1</sup>	$P_D$	2.5	W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	$^\circ C$

**Thermal Characteristics**

Parameter	Symbol	Typical	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	40	$^\circ C/W$
Maximum Junction-to-Ambient		50	$^\circ C/W$

**Note 1.**  $I_S$  rated value is based on bare silicon. Mounted on 70mmx70mm FR-4 board.

**Note 2.** PW < 10  $\mu s$  pulses, duty cycle 1% max.

**Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
BV <sub>SSS</sub>	Source-Source Breakdown Voltage	I <sub>S</sub> =250μA, V <sub>GS</sub> =0V Test Circuit 6	12			V
I <sub>SSS</sub>	Zero Gate Voltage Source Current	V <sub>SS</sub> =12V, V <sub>GS</sub> =0V Test Circuit 1 T <sub>J</sub> =55°C			1 5	μA
I <sub>GSS</sub>	Gate leakage current	V <sub>SS</sub> =0V, V <sub>GS</sub> =±8V Test Circuit 2			±10	μA
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>SS</sub> =V <sub>GS</sub> , I <sub>S</sub> =250μA Test Circuit 3	0.4	0.8	1.2	V
R <sub>SS(ON)</sub>	Static Source to Source On-Resistance	V <sub>GS</sub> =4.5V, I <sub>S</sub> =5A Test Circuit 4 T <sub>J</sub> =125°C	1.7	2.38	3.0	mΩ
		V <sub>GS</sub> =4.0V, I <sub>S</sub> =5A Test Circuit 4	1.75	2.45	3.1	mΩ
		V <sub>GS</sub> =3.8V, I <sub>S</sub> =5A Test Circuit 4	1.8	2.5	3.2	mΩ
		V <sub>GS</sub> =3.1V, I <sub>S</sub> =5A Test Circuit 4	1.9	2.7	3.5	mΩ
		V <sub>GS</sub> =2.5V, I <sub>S</sub> =5A Test Circuit 4	2.2	3.2	4.4	mΩ
g <sub>FS</sub>	Forward Transconductance	V <sub>SS</sub> =5V, I <sub>S</sub> =5A Test Circuit 3		50		S
V <sub>FSS</sub>	Forward Source to Source Voltage	I <sub>S</sub> =1A, V <sub>GS</sub> =0V Test Circuit 5		0.65	1	V
<b>DYNAMIC PARAMETERS</b>						
R <sub>g</sub>	Gate resistance	f=1MHz		1.2		KΩ
<b>SWITCHING PARAMETERS</b>						
Q <sub>g</sub>	Total Gate Charge	V <sub>G1S1</sub> =4.5V, V <sub>SS</sub> =6V, I <sub>S</sub> =5A		46		nC
t <sub>D(on)</sub>	Turn-On DelayTime	V <sub>G1S1</sub> =4.5V, V <sub>SS</sub> =6V, R <sub>L</sub> =1.2Ω, R <sub>GEN</sub> =3Ω Test Circuit8		2.5		μs
t <sub>r</sub>	Turn-On Rise Time			5.5		μs
t <sub>D(off)</sub>	Turn-Off DelayTime			4		μs
t <sub>f</sub>	Turn-Off Fall Time			11		μs

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

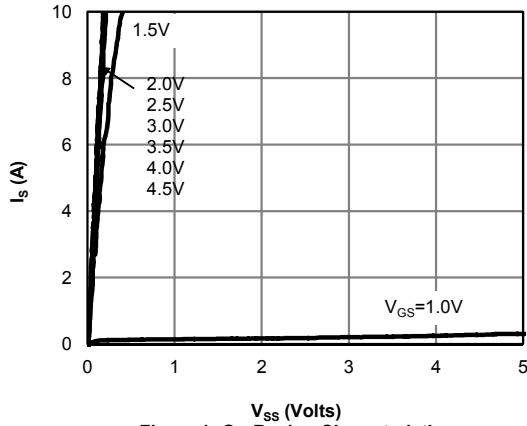


Figure 1: On-Region Characteristics

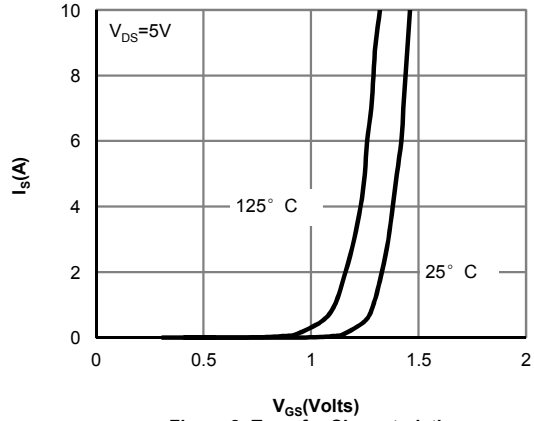


Figure 2: Transfer Characteristics

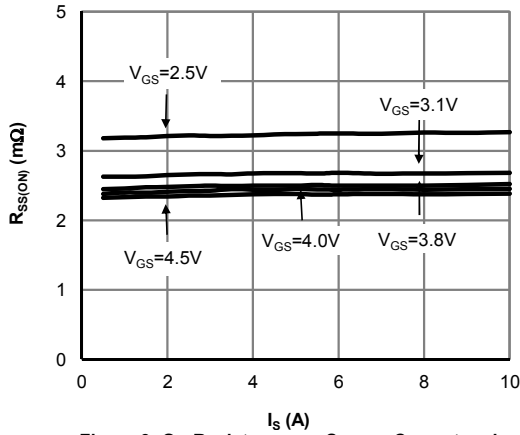


Figure 3: On-Resistance vs. Source Current and Gate Voltage

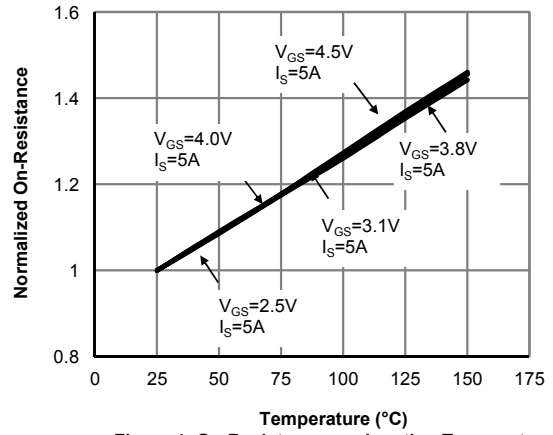


Figure 4: On-Resistance vs. Junction Temperature

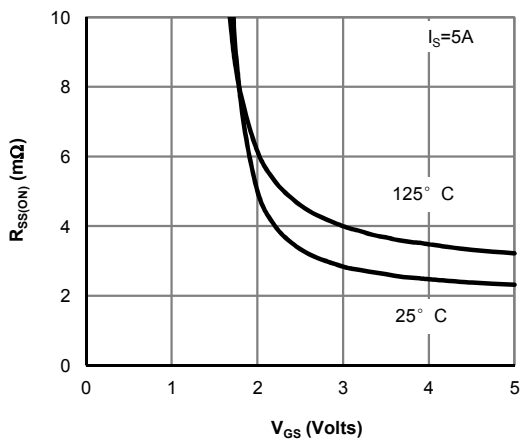


Figure 5: On-Resistance vs. Gate-Source Voltage


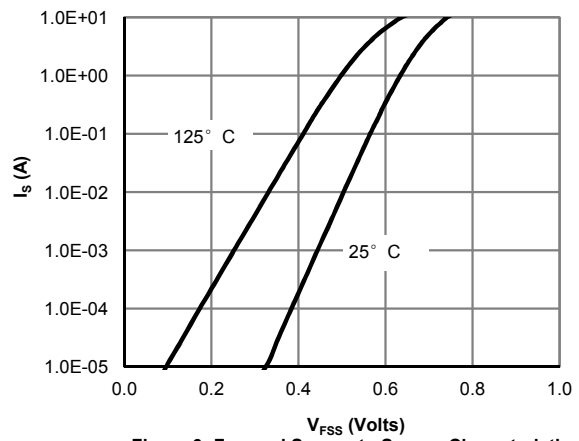



Figure 6: Forward Source to Source Characteristics




**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

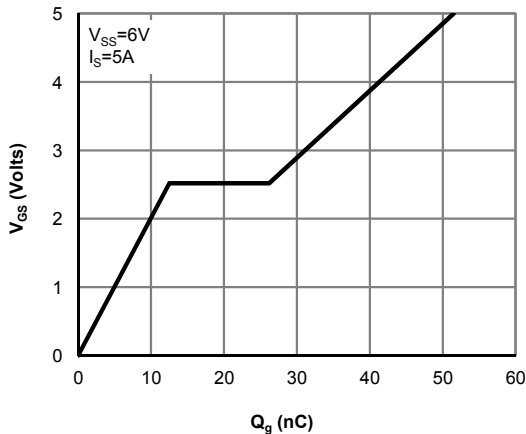


**Figure 7: Gate-Charge Characteristics**

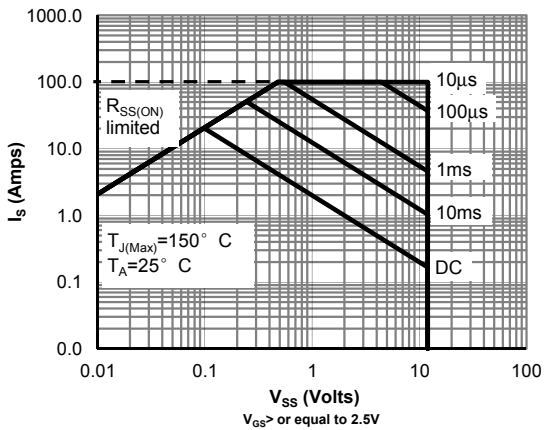

**Figure 8: Maximum Forward Biased Safe Operating Area (Note1)**

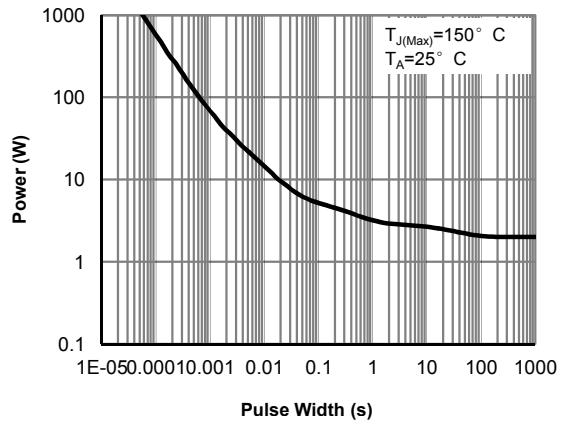

**Figure 9: Single Pulse Power Rating Junction-to-Ambient (Note1)**

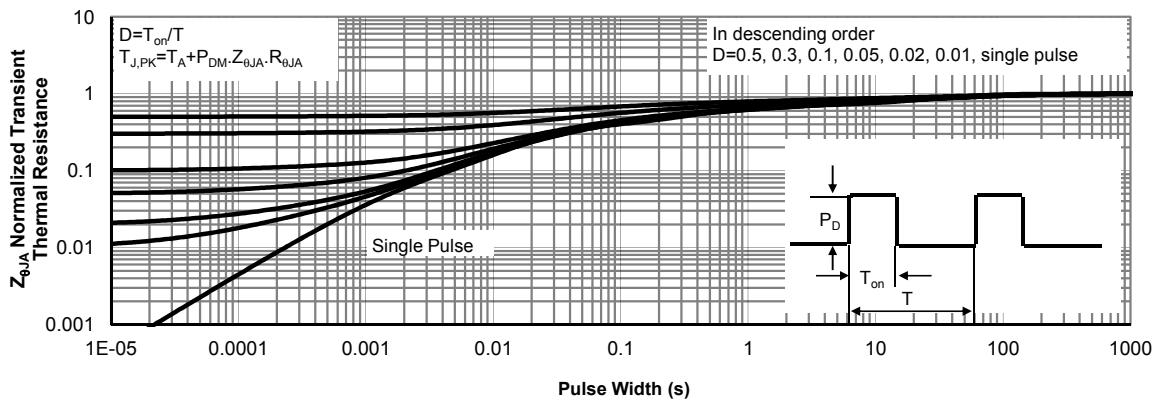

**Figure 10: Normalized Maximum Transient Thermal Impedance (Note1)**

