



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Apacer

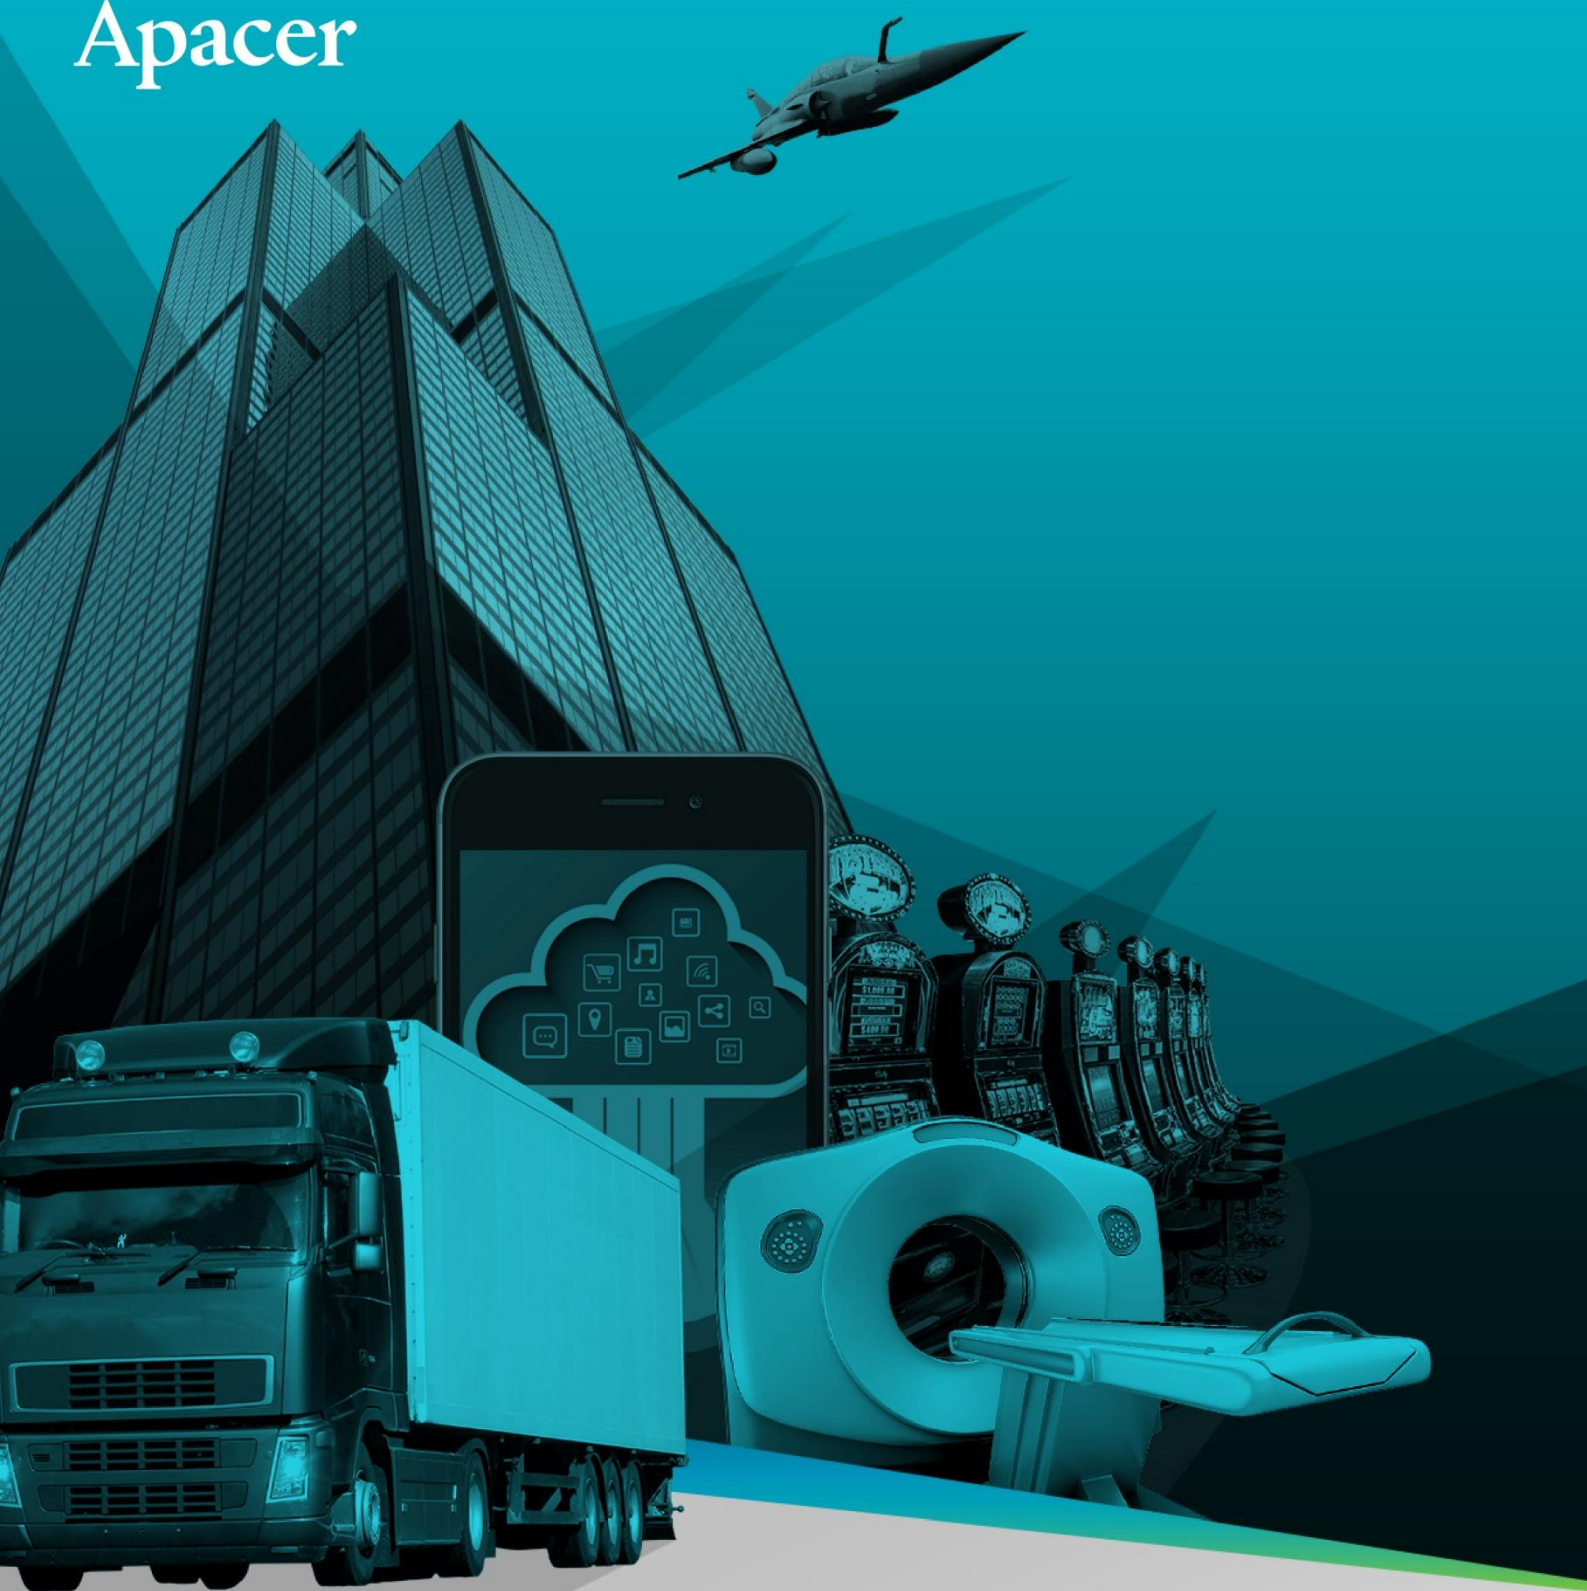

The Most **Reliable**  
Storage For Industries




Industrial microSD card

## Industrial MicroSD(HC) card Industrial MicroSD (SLC)

### Overview

Apacer's industrial-grade MicroSD memory card is compliant with SD 2.0 Specification. Available in 256MB to 4GB, with sequential read/write speed reaching up to 20/16 MB/sec, it fulfills requirements for flexible-capacity and high-speed data storage. With a superbly reliable SLC (single-level cell) flash memory, it can operate normally in harsh temperature environments ranging from -40°C - +85°C. Apacer stresses "stability" has always been the primary concern for industrial devices. The greatest difference between this industrial-grade MicroSD memory card and other consumer memory cards on the market lies in its firmware version and major components that can be fixed. Apacer's clients can benefit from the stable, long term supply. Besides, for clients who need long-term and stable supply chains, stock-out risk may be avoided, with compatibility issues caused by frequent product component changes significantly reduced. Time and money spent on product verification can also be saved.



### Feature

- Compliant with SD 2.0 Specification
- S.M.A.R.T supported
- Wear-Leveling and Block Management
- Support SD mode and SPI mode
- Low Power Consumption
- Wide Temperature Support

## Specifications

<b>Model</b>	Industrial microSD
<b>Interface</b>	SD2.0
<b>NAND Flash Type</b>	SLC
<b>Capacity</b>	SD:256MB~2GB;SDHC:4GB
<b>Sustained Read Performance (MB/sec)</b>	Up to 20
<b>Sustained Write Performance (MB/sec)</b>	Up to 16
<b>ECC Engine*</b>	Built-in 24-bit per 1K bytes BCH ECC
<b>Extended Operating Temperature ( °C )</b>	-40 ~ + 85
<b>Storage Temperature ( °C )</b>	-40 ~ + 85
<b>Shock</b>	1,500G, 0.5ms
<b>Vibration</b>	20Hz~80Hz/1.52mm (frequency/displacement) 80Hz~2,000Hz/20G (frequency/accelerate)
<b>Humidity</b>	95%
<b>Operating Voltage</b>	3.3 V ± 5%
<b>Low Power Consumption</b>	AcActive mode: 50 mA & Idle mode: 100 uA
<b>Dimension (L x W x H )</b>	15x11x1 (mm)
<b>MTBF (hours)</b>	>2,000,000
<b>Features / Technology</b>	S.M.A.R.T./Wide Temp.
<b>Applications</b>	Military/Cloud Computing/In-Vehicle/Gaming/HealthCare/Embedded System

## Ordering Info

Model	Extended temp: -40~85
256MB	AP-MSD256ISI-1T
512MB	AP-MSD512IDI-1T
1G	AP-MSD01GISI-T
2G	AP-MSD02GIDI-T
4G	AP-MSD04GIHI-T

## Global Presence

Taiwan (Headquarters)  
Apacer Technology Inc.  
Tel: +886-2-2267-8000  
Fax: +886-2-2267-2261

Europe  
Apacer Technology B.V.  
Tel: +31-40-267-0000  
Fax: +31-40-290-0686

U.S.A.  
Apacer Memory America, Inc.  
Tel: +1-408-518-8699  
Fax: 1-510-249-9568

China  
Apacer Electronic(Shanghai)  
Co., Ltd.  
Tel: +86-21-6228-9939

Japan  
Apacer Technology Corp.  
Tel: +81-3-5419-2668  
Fax: +81-3-5419-0018

India  
Apacer Technologies Pvt. Ltd.  
Tel: +91-80-41529061~3  
Fax: +91-80-41700215