



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Data Sheet

### Description

APDS-9102 is a low cost, fast switching speed reflective proximity sensor that incorporates an infrared LED and a phototransistor in a single integrated package. APDS-9102 supports the detection distance of near 0 to approx 8mm, enabling to support a wide range of applications.

### Application Support Information

The Application Engineering Group is available to assist you with the application design associated with APDS-9102. You can contact them through your local sales representatives for additional details

### Ordering Information

Part Number	Package	Quantity
APDS-9102-L22	4 pin leads	1600

### Features

- Detection distance of near 0mm to 8mm
- Fast Switching Speed
- Package size
  - Height – 15.2 mm
  - Width – 5 mm
  - Depth – 17.8 mm
- Operating temperature : -35°C to 65°C
- Lead-free and RoHS Compliant

### Applications

APDS-9102 is widely suitable to provide reflective object or proximity sensing suitable for various applications in industrial, office automation and consumer markets.

- Industrial – Automatic vending machines, amusement/gaming machines, coin/bill validators etc
- Office automation – Printers, Copiers etc
- Consumer – Coffee machines, beverage dispensing machines etc

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Max Rating	Unit
<b>Infrared Diode</b>			
Power Dissipation <sup>[1]</sup>	P <sub>D</sub>	75	mW
Peak Forward Current (300pps, 10 μs pulse)	I <sub>CP</sub>	3	A
Continuous Forward Current	I <sub>F</sub>	50	mA
Reverse Voltage	V <sub>R</sub>	5	V
<b>Phototransistor</b>			
Power Dissipation <sup>[1]</sup>	P <sub>C</sub>	100	mW
Collector-Emitter Voltage	V <sub>CEO</sub>	30	V
Emitter-Collector Voltage	V <sub>ECO</sub>	5	V
Collector Current	I <sub>C</sub>	20	mA
Operating Temperature Range	T <sub>OP</sub>	-35°C to +65°C	
Storage Temperature Range	T <sub>STG</sub>	-40°C to +100°C	
Lead Soldering Temperature (1.6mm(0.063") From Case)	T <sub>S</sub>	260°C for 5 seconds	

Note:

1. Derate Linearly 1.33mW/°C from 25°C


## Electrical / Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
<b>Input Diode</b>						
Forward Voltage	V <sub>F</sub>		1.2	1.6	V	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
<b>Output Phototransistor</b>						
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	30			V	I <sub>C</sub> =1mA
Emitter-Collector Breakdown Voltage	V <sub>(BR)ECO</sub>	5			V	I <sub>E</sub> =0.1mA
Collector-Emitter Dark Current	I <sub>CEO</sub>			100	nA	V <sub>CE</sub> =10V
<b>Coupler</b>						
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.4	V	I <sub>C</sub> =0.08mA, I <sub>F</sub> =20mA
On State Collector Current <sup>[2]</sup>	I <sub>C(ON)</sub>	0.16			mA	V <sub>CE</sub> =5V, I <sub>F</sub> =20mA

Note:

2. Reflective surface is Eastman Kodak(or equivalent) neutral white paper with 90% diffused reflectance placed at 3.81mm(0.15") from read head.

## APDS-9102 Package Outline

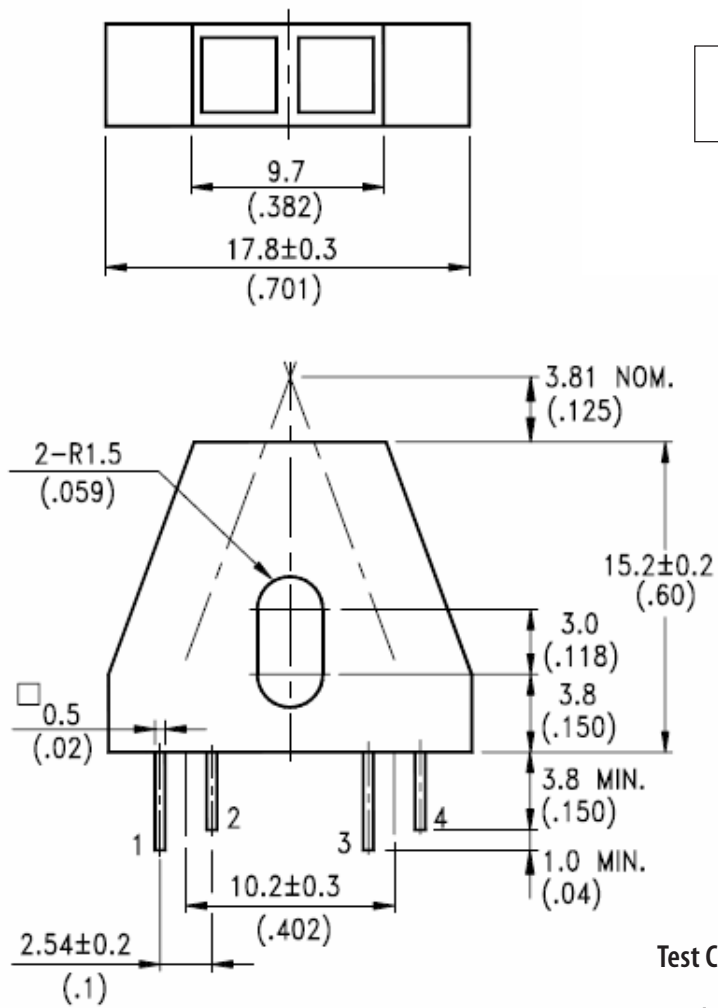

### NOTES:


1. All dimensions are in millimeters(inches)
2. Tolerance is ± 0.25mm(0.010") unless otherwise noted
3. Specifications are subjected to change specifications without prior notice.

## I/O Pins Configuration Table



The electrical pin assignments are depicted in the below table.

Pin	Function	Description
1	Anode	LED Anode
2	Cathode	LED Cathode
3	Emitter	Phototransistor Emitter
4	Collector	Phototransistor Collector

## APDS-9102 Block Diagram

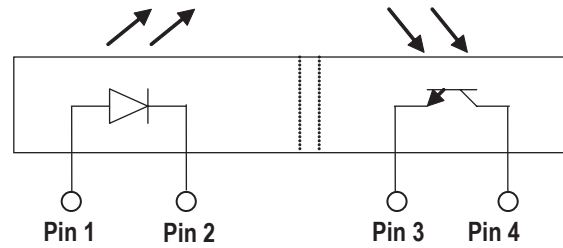

## Test Circuit for Response Time

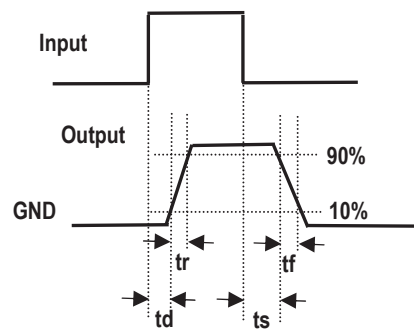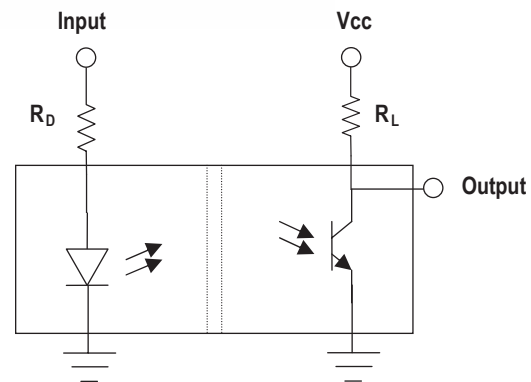



## APDS-9102 Performance Charts

Typical Electrical/Optical Characteristics Curves ( $T_a=25^\circ\text{C}$  unless otherwise indicated)

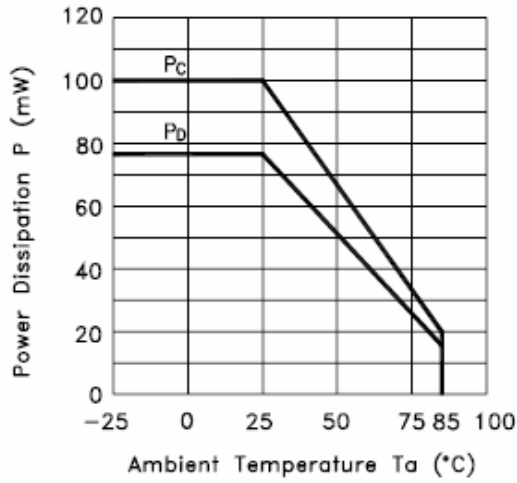


Figure 1. Power Dissipation vs. Ambient Temperature

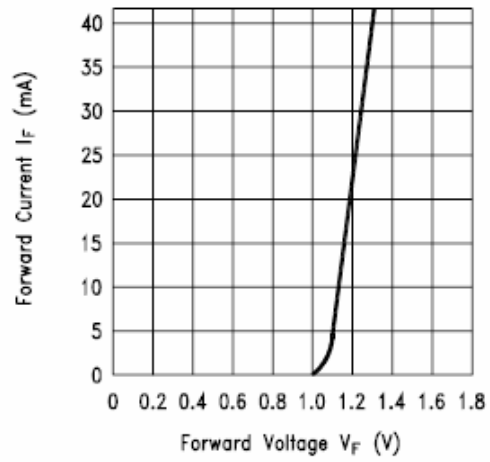


Figure 2. Forward Current vs. Forward Voltage

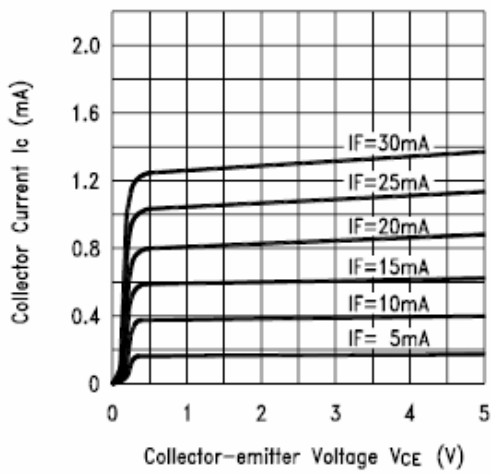


Figure 3. Collector Current vs. Collector-emitter Voltage

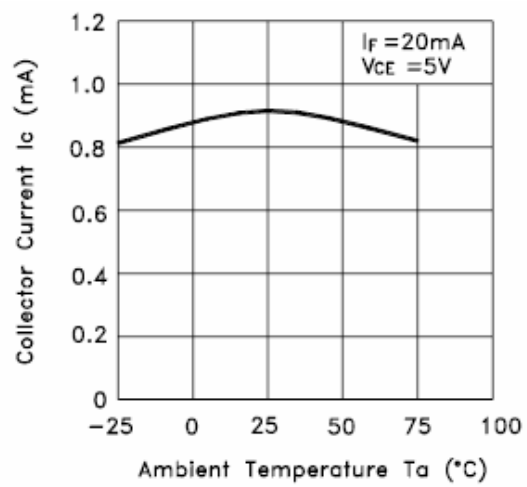


Figure 4. Collector Current vs. Ambient Temperature

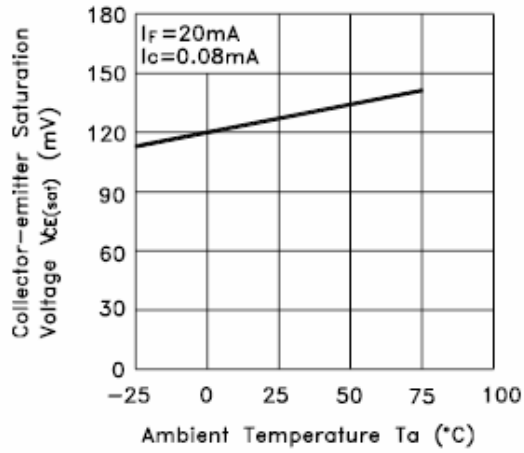


Figure 5. Collector-emitter Saturation Voltage vs. Ambient Temperature

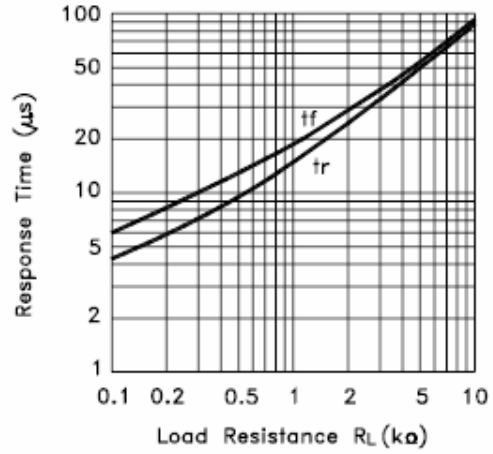


Figure 6. Response Time vs. Load Resistance

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2007 Avago Technologies Limited. All rights reserved. AV02-0030EN - January 23, 2007

