



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NPCAP™-PSG Series *Upgrade!*

- Super low ESR, high ripple current capability
- Added 35V
- Endurance: 15,000 to 20,000 hours at 105°C
- Rated voltage : 16 to 35V<sub>dc</sub>
- RoHS2 Compliant
- Halogen Free

PSG  
↓  
Downsized  
PSF P2-40



◆ SPECIFICATIONS


| Items  | Characteristics  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
|--|--|------------|-----------------------|--------------------|-----------------------------|--------------|---------------------------------------|-----|---------------------------------------|-----------------|-------------------------------|
| <b>Category</b>  | -55 to +105°C  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Temperature Range</b>                                     |  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Rated Voltage</b>   | 16 to 35V <sub>dc</sub>  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Capacitance Tolerance</b>                                 | ±20% (M) (at 20°C, 120Hz)  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Surge Voltage</b>   | Rated voltage(V) × 1.15 (at 105°C)   |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Leakage Current</b><br><small>*Note</small>               | I=0.2CV or 500μA, whichever is greater<br>Where, I : Leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)   |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Dissipation Factor (tan δ)</b>                            | 0.12 max. (at 20°C, 120Hz)   |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Low Temperature Characteristics (Max.Impedance Ratio)</b> | Z(-25°C)/Z(+20°C) ≤ 1.15<br>Z(-55°C)/Z(+20°C) ≤ 1.25 (at 100kHz)   |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Endurance</b>   | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 20,000 hours (20 to 35V : 15,000 hours) at 105°C.  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
|  | <table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>ESR</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table> | Appearance | No significant damage | Capacitance change | ≤ ±20% of the initial value | D.F. (tan δ) | ≤ 150% of the initial specified value | ESR | ≤ 150% of the initial specified value | Leakage current | ≤ The initial specified value |
| Appearance   | No significant damage  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Capacitance change   | ≤ ±20% of the initial value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| D.F. (tan δ)   | ≤ 150% of the initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| ESR  | ≤ 150% of the initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Leakage current  | ≤ The initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Bias Humidity Test</b>                                    | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to DC voltage at 60°C, 90 to 95% RH for 1,000 hours.  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
|  | <table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ The initial specified value</td></tr> <tr><td>ESR</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>         | Appearance | No significant damage | Capacitance change | ≤ ±20% of the initial value | D.F. (tan δ) | ≤ The initial specified value         | ESR | ≤ 150% of the initial specified value | Leakage current | ≤ The initial specified value |
| Appearance   | No significant damage  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Capacitance change   | ≤ ±20% of the initial value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| D.F. (tan δ)   | ≤ The initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| ESR  | ≤ 150% of the initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Leakage current  | ≤ The initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Surge Voltage Test</b>                                    | The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
|  | <table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ The initial specified value</td></tr> <tr><td>ESR</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>         | Appearance | No significant damage | Capacitance change | ≤ ±20% of the initial value | D.F. (tan δ) | ≤ The initial specified value         | ESR | ≤ 150% of the initial specified value | Leakage current | ≤ The initial specified value |
| Appearance   | No significant damage  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Capacitance change   | ≤ ±20% of the initial value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| D.F. (tan δ)   | ≤ The initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| ESR  | ≤ 150% of the initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| Leakage current  | ≤ The initial specified value  |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |
| <b>Failure Rate</b>  | 0.5% per 1,000 hours maximum (Confidence level 60% at 105°C)   |            |                       |                    |                             |              |                                       |     |                                       |                 |                               |

\*Note : If any doubt arises, measure the leakage current after the following voltage treatment.  
Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105°C.

◆ DIMENSIONS [mm]

- Terminal Code : E


F05,F08,H06,H08

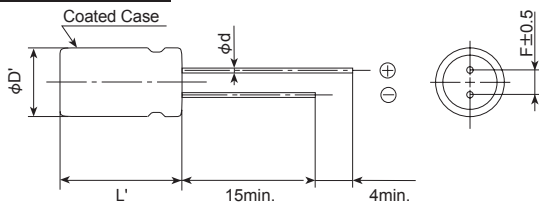

| Size code | F05               | F08 | H06 | H08 | HB5 | H16       | H20 | JB5 | J16 | J20 |
|-----------|-------------------|-----|-----|-----|-----|-----------|-----|-----|-----|-----|
| φD        | 6.3               |     | 8.0 |     |     | 10.0      |     |     |     |     |
| φd        | 0.45              |     | 0.6 |     |     |           |     |     |     |     |
| F         | 2.5               |     | 3.5 |     |     | 5.0       |     |     |     |     |
| φD'       | φD+0.5max.        |     |     |     |     |           |     |     |     |     |
| L'        | L+1.0max. (Note1) |     |     |     |     | L+1.5max. |     |     |     |     |

Note1 : L+1.2 max. for 16V270μF (Rated ripple current 5,080mArms).

HB5,H16,H20,JB5,J16,J20

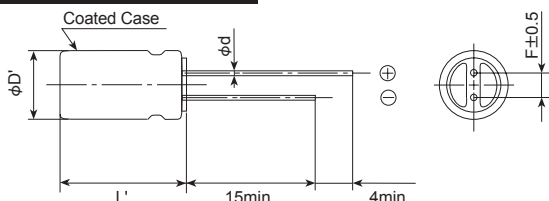


◆ MARKING

EX) 16V150μF



◆PART NUMBERING SYSTEM

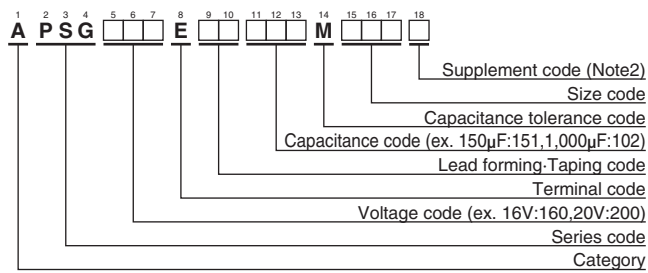

(Note2) : PSG series, 16V270µF (Rated ripple current 5,080mArms) ,16V470µF (Rated ripple current 5,400mArms) ,16V560µF (Rated ripple current 6,100mArms) have supplement code “J”. Terminal and terminal plating are the same as all other in PSG series.

Please refer to “Product code guide (conductive polymer type)”

◆STANDARD RATINGS

| WV (V <sub>dc</sub> ) | Cap (µF)  | Case size φD×L (mm) | ESR (mΩ max./20°C, 100k to 300kHz) | Rated ripple current (mArms/105°C, 100kHz) | Part No.           |
|-----------------------|-----------|---------------------|------------------------------------|--|--------------------|
| 16                    | 150       | 6.3 × 5             | 20                                 | 3,200                                      | APSG160E□□151MF05S |
|                       | 270       | 6.3 × 8             | 10                                 | 5,080                                      | APSG160E□□271MF08J |
|                       | 270       | 6.3 × 8             | 15                                 | 3,800                                      | APSG160E□□271MF08S |
|                       | 270       | 8 × 6               | 22                                 | 3,300                                      | APSG160E□□271MH06S |
|                       | 470       | 8 × 8               | 8                                  | 5,400                                      | APSG160E□□471MH08J |
|                       | 470       | 8 × 8               | 16                                 | 4,000                                      | APSG160E□□471MH08S |
|                       | 560       | 8 × 11.5            | 8                                  | 6,100                                      | APSG160E□□561MHB5J |
|                       | 560       | 8 × 11.5            | 14                                 | 4,970                                      | APSG160E□□561MHB5S |
|                       | 820       | 8 × 16              | 8                                  | 7,000                                      | APSG160E□□821MH16S |
|                       | 820       | 10 × 11.5           | 12                                 | 5,400                                      | APSG160E□□821MJB5S |
|                       | 1,000     | 8 × 20              | 8                                  | 7,500                                      | APSG160E□□102MH20S |
|                       | 1,000     | 10 × 11.5           | 12                                 | 5,400                                      | APSG160E□□102MJB5S |
|                       | 1,200     | 8 × 20              | 8                                  | 7,500                                      | APSG160E□□122MH20S |
|                       | 1,500     | 10 × 16             | 8                                  | 7,700                                      | APSG160E□□152MJ16S |
| 1,800                 | 10 × 20   | 8                   | 8,100                              | APSG160E□□182MJ20S                         |                    |
| 2,200                 | 10 × 20   | 8                   | 8,100                              | APSG160E□□222MJ20S                         |                    |
| 20                    | 120       | 6.3 × 5             | 20                                 | 3,200                                      | APSG200E□□121MF05S |
|                       | 180       | 6.3 × 8             | 18                                 | 3,460                                      | APSG200E□□181MF08S |
|                       | 330       | 8 × 8               | 17                                 | 3,880                                      | APSG200E□□331MH08S |
|                       | 390       | 8 × 11.5            | 14                                 | 4,970                                      | APSG200E□□391MHB5S |
|                       | 680       | 10 × 11.5           | 12                                 | 5,400                                      | APSG200E□□681MJB5S |
| 25                    | 56        | 6.3 × 5             | 30                                 | 2,600                                      | APSG250E□□560MF05S |
|                       | 82        | 6.3 × 8             | 28                                 | 2,780                                      | APSG250E□□820MF08S |
|                       | 180       | 8 × 8               | 18                                 | 3,770                                      | APSG250E□□181MH08S |
|                       | 180       | 8 × 11.5            | 16                                 | 4,650                                      | APSG250E□□181MHB5S |
|                       | 220       | 8 × 11.5            | 16                                 | 4,650                                      | APSG250E□□221MHB5S |
|                       | 330       | 10 × 11.5           | 14                                 | 5,000                                      | APSG250E□□331MJB5S |
|                       | 390       | 10 × 11.5           | 14                                 | 5,000                                      | APSG250E□□391MJB5S |
| 560                   | 10 × 11.5 | 14                  | 5,000                              | APSG250E□□561MJB5S                         |                    |
| 35                    | 68        | 8 × 11.5            | 18                                 | 4,380                                      | APSG350E□□680MHB5S |
|                       | 120       | 10 × 11.5           | 16                                 | 4,670                                      | APSG350E□□121MJB5S |

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

| Frequency (Hz)   | 120  | 1k   | 10k  | 50k  | 100k to 500k |
|------------------|------|------|------|------|--------------|
| Radial lead type | 0.10 | 0.35 | 0.60 | 0.80 | 1.00         |