



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

N-Channel FREDFET

Power MOS 8™ is a high speed, high voltage N-channel switch-mode power MOSFET. This 'FREDFET' version has a drain-source (body) diode that has been optimized for high reliability in ZVS phase shifted bridge and other circuits through reduced t_{rr} , soft recovery, and high recovery dv/dt capability. Low gate charge, high gain, and a greatly reduced ratio of C_{rss}/C_{iss} result in excellent noise immunity and low switching loss. The intrinsic gate resistance and capacitance of the poly-silicon gate structure help control di/dt during switching, resulting in low EMI and reliable paralleling, even when switching at very high frequency.

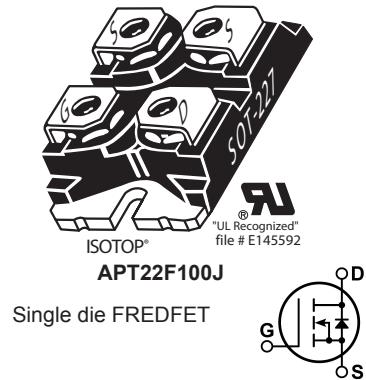

FEATURES

- Fast switching with low EMI
- Low t_{rr} for high reliability
- Ultra low C_{rss} for improved noise immunity
- Low gate charge
- Avalanche energy rated
- RoHS compliant 

TYPICAL APPLICATIONS

- ZVS phase shifted and other full bridge
- Half bridge
- PFC and other boost converter
- Buck converter
- Single and two switch forward
- Flyback

Absolute Maximum Ratings

Symbol	Parameter	Ratings	Unit
I_D	Continuous Drain Current @ $T_C = 25^\circ\text{C}$	23	A
	Continuous Drain Current @ $T_C = 100^\circ\text{C}$	15	
I_{DM}	Pulsed Drain Current ^①	140	
V_{GS}	Gate-Source Voltage	± 30	V
E_{AS}	Single Pulse Avalanche Energy ^②	2165	mJ
I_{AR}	Avalanche Current, Repetitive or Non-Repetitive	18	A

Thermal and Mechanical Characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
P_D	Total Power Dissipation @ $T_C = 25^\circ\text{C}$			545	W
$R_{\theta JC}$	Junction to Case Thermal Resistance			0.23	°C/W
$R_{\theta CS}$	Case to Sink Thermal Resistance, Flat, Greased Surface		0.11		
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55		150	°C
$V_{Isolation}$	RMS Voltage (50-60Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.)	2500			V
W_T	Package Weight		1.03		oz
			29.2		g
Torque	Terminals and Mounting Screws.			10	in·lbf
				1.1	N·m

Static Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

APT22F100J

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{BR(DSS)}$	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu\text{A}$	1000			V
$\Delta V_{BR(DSS)}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}, I_D = 250\mu\text{A}$		1.15		$\text{V}/^\circ\text{C}$
$R_{DS(on)}$	Drain-Source On Resistance ^③	$V_{GS} = 10V, I_D = 18\text{A}$		0.32	0.38	Ω
$V_{GS(th)}$	Gate-Source Threshold Voltage	$V_{GS} = V_{DS}, I_D = 2.5\text{mA}$	2.5	4	5	V
$\Delta V_{GS(th)}/\Delta T_J$	Threshold Voltage Temperature Coefficient			-10		$\text{mV}/^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1000V, T_J = 25^\circ\text{C}$			250	μA
		$V_{GS} = 0V, T_J = 125^\circ\text{C}$			1000	
I_{GSS}	Gate-Source Leakage Current	$V_{GS} = \pm 30V$			± 100	nA

Dynamic Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
g_{fs}	Forward Transconductance	$V_{DS} = 50V, I_D = 18\text{A}$		39		S
C_{iss}	Input Capacitance	$V_{GS} = 0V, V_{DS} = 25V$ $f = 1\text{MHz}$		9835		pF
C_{rss}	Reverse Transfer Capacitance			130		
C_{oss}	Output Capacitance			825		
$C_{o(cr)}^{\text{④}}$	Effective Output Capacitance, Charge Related	$V_{GS} = 0V, V_{DS} = 0V$ to $667V$		335		pF
$C_{o(er)}^{\text{⑤}}$	Effective Output Capacitance, Energy Related			170		
Q_g	Total Gate Charge	$V_{GS} = 0$ to $10V, I_D = 18\text{A}$, $V_{DS} = 500V$		305		nC
Q_{gs}	Gate-Source Charge			55		
Q_{gd}	Gate-Drain Charge			145		
$t_{d(on)}$	Turn-On Delay Time	Resistive Switching $V_{DD} = 667V, I_D = 18\text{A}$ $R_G = 2.2\Omega^{\text{⑥}}$, $V_{GG} = 15V$		44		ns
t_r	Current Rise Time			40		
$t_{d(off)}$	Turn-Off Delay Time			150		
t_f	Current Fall Time			38		

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
I_s	Continuous Source Current (Body Diode)	MOSFET symbol showing the integral reverse p-n junction diode (body diode)			23	A
I_{SM}	Pulsed Source Current (Body Diode) ^①				140	
V_{SD}	Diode Forward Voltage	$I_{SD} = 18\text{A}, T_J = 25^\circ\text{C}, V_{GS} = 0V$			1.2	V
t_{rr}	Reverse Recovery Time	$I_{SD} = 18\text{A}^{\text{③}}$ $V_{DD} = 100V$ $di_{SD}/dt = 100\text{A}/\mu\text{s}$	$T_J = 25^\circ\text{C}$		300	ns
			$T_J = 125^\circ\text{C}$		650	
Q_{rr}	Reverse Recovery Charge	$I_{SD} = 18\text{A}^{\text{③}}$ $V_{DD} = 100V$ $di_{SD}/dt = 100\text{A}/\mu\text{s}$	$T_J = 25^\circ\text{C}$	1.61		μC
			$T_J = 125^\circ\text{C}$	4.21		
I_{rrm}	Reverse Recovery Current	$I_{SD} = 18\text{A}^{\text{③}}$ $V_{DD} = 100V$ $di_{SD}/dt = 100\text{A}/\mu\text{s}$	$T_J = 25^\circ\text{C}$	11.6		A
			$T_J = 125^\circ\text{C}$	15.8		
dv/dt	Peak Recovery dv/dt	$I_{SD} \leq 18\text{A}, di/dt \leq 1000\text{A}/\mu\text{s}, V_{DD} = 667V, T_J = 125^\circ\text{C}$			25	V/ns

① Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.

② Starting at $T_J = 25^\circ\text{C}$, $L = 13.36\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 18\text{A}$.









③ Pulse test: Pulse Width < $380\mu\text{s}$, duty cycle < 2%.

④ $C_{o(cr)}$ is defined as a fixed capacitance with the same stored charge as C_{oss} with $V_{DS} = 67\%$ of $V_{(BR)DSS}$.

⑤ $C_{o(er)}$ is defined as a fixed capacitance with the same stored energy as C_{oss} with $V_{DS} = 67\%$ of $V_{(BR)DSS}$. To calculate $C_{o(er)}$ for any value of V_{DS} less than $V_{(BR)DSS}$, use this equation: $C_{o(er)} = -2.85E-7/V_{DS}^2 + 5.04E-8/V_{DS} + 9.75E-11$.

⑥ R_G is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

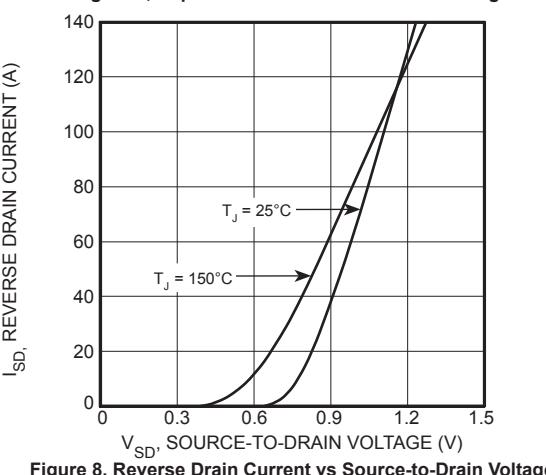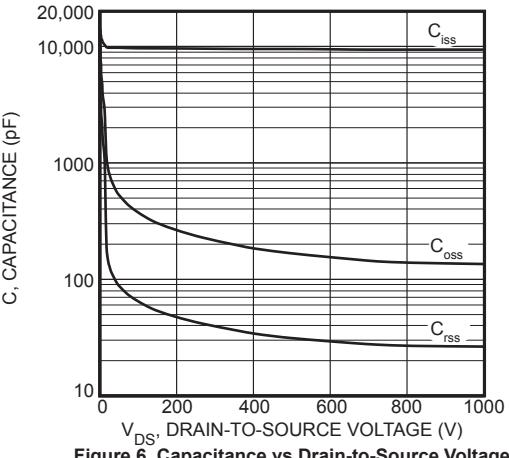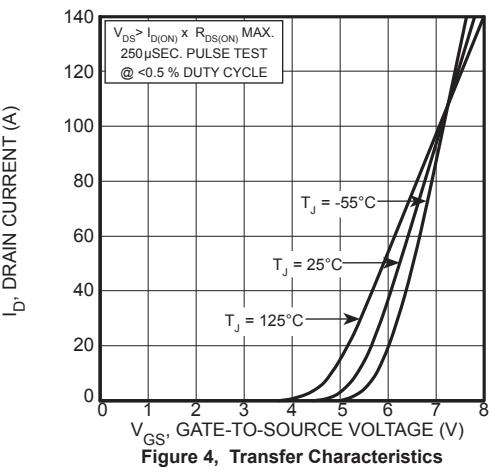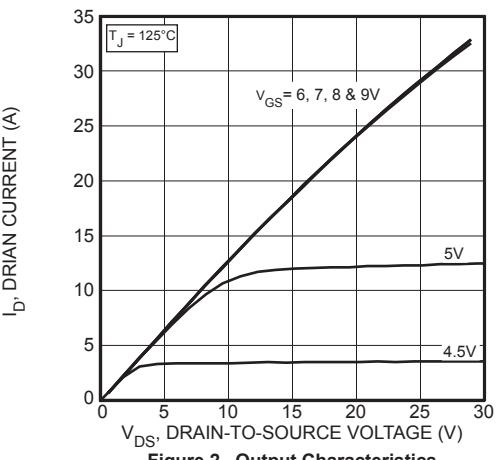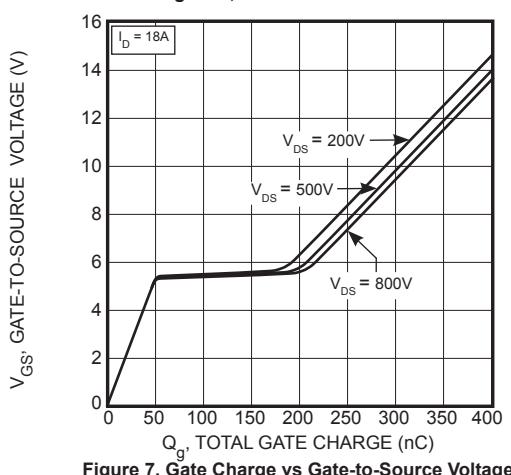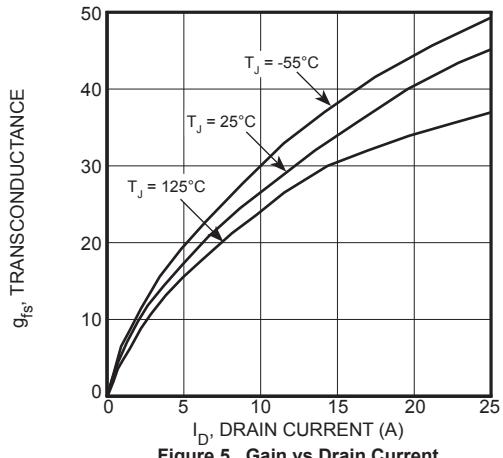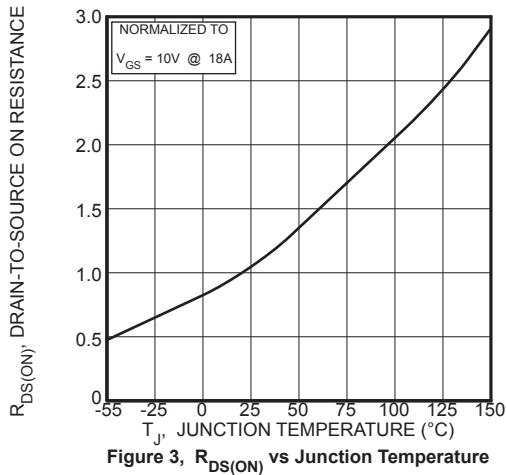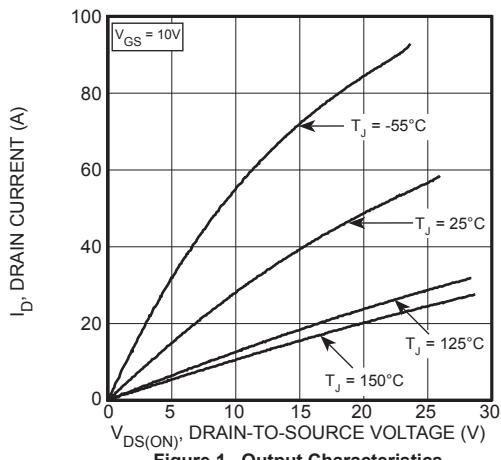

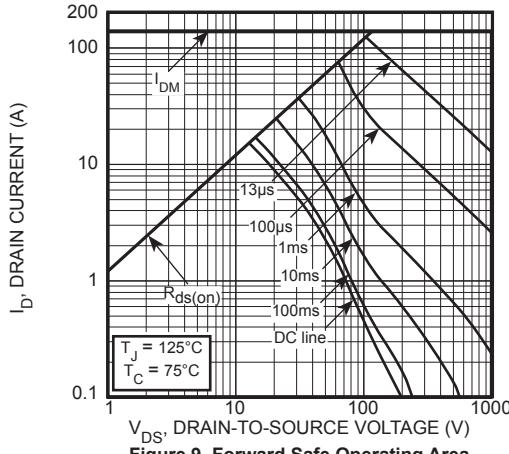


Figure 9, Forward Safe Operating Area

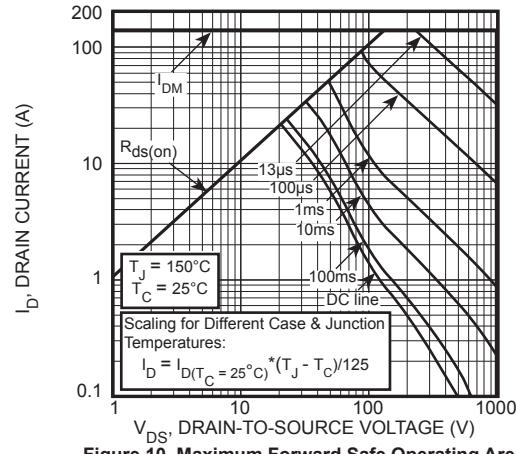


Figure 10, Maximum Forward Safe Operating Area


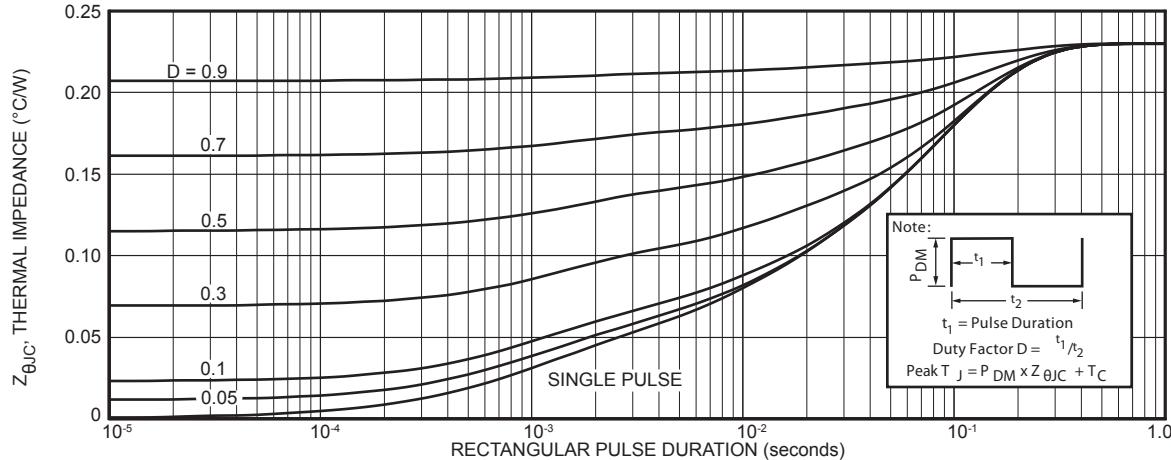


Figure 11. Maximum Effective Transient Thermal Impedance Junction-to-Case vs Pulse Duration

SOT-227 (ISOTOP®) Package Outline

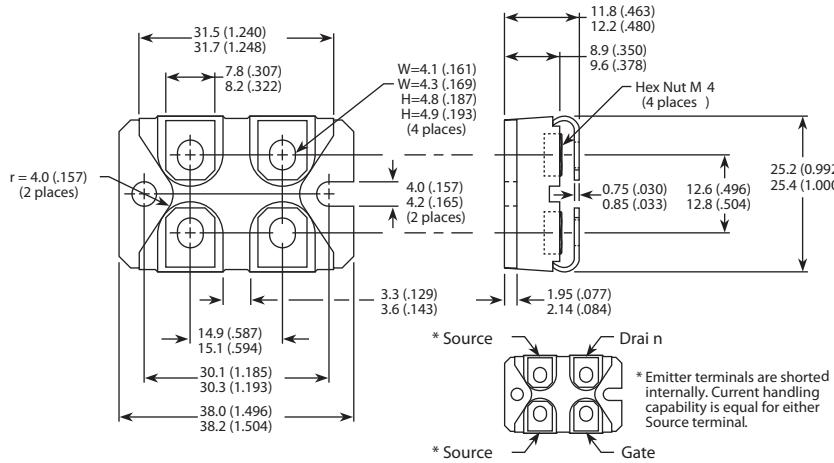

Dimensions in Millimeters and (Inches)