



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


 (Standard type)  (Reinforced type)

**6-pin type for switching
low-level analog signal**

PhotoMOS®

GU 1 Form A
(AQV21O, AQV214H)

FEATURES

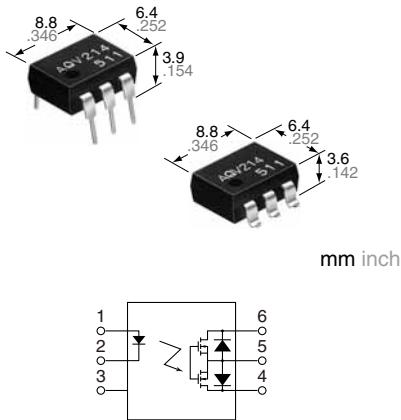

RoHS compliant

1. Controls low-level analog signals
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

2. Controls various types of loads
such as relays, motors, lamps and solenoids

3. Optical coupling for extremely high isolation

Unlike mechanical relays, the PhotoMOS combines LED and optoelectronic device to transfer signals using light for extremely high isolation.

4. Eliminates the need for a counter electromotive force protection diode
in the drive circuits on the input side

5. Stable on-resistance

6. Low-level off state leakage current
of max. 1 μ A

7. Reinforced insulation type of I/O
voltage 5,000V also available

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computers

TYPES

I/O isolation	Output rating*	Part No.		Packing quantity	
		Through hole terminal	Surface-mount terminal		
		Tube packing style		Tape and reel packing style	
AC/DC dual use	Standard 1,500 V AC			Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side
	AQV212	AQV212A	AQV212AX	AQV212AZ	
	AQV215	AQV215A	AQV215AX	AQV215AZ	
	AQV217	AQV217A	AQV217AX	AQV217AZ	
	AQV210	AQV210A	AQV210AX	AQV210AZ	
	AQV214	AQV214A	AQV214AX	AQV214AZ	
	Reinforced 5,000 V	AQV216	AQV216A	AQV216AX	AQV216AZ
		AQV214H	AQV214HA	AQV214HAX	AQV214HAZ

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

GU 1 Form A (AQV21○, AQV214H)

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV212(A)	AQV215(A)	AQV217(A)	AQV210(A)	AQV214(A)	AQV216(A)	AQV214H(A)	Remarks	
Input	LED forward current	I _F				50 mA						
	LED reverse voltage	V _R				5 V						
	Peak forward current	I _{FP}				1 A				f = 100 Hz, Duty factor = 0.1%		
	Power dissipation	P _{in}				75 mW						
Output	Load voltage (peak AC)	V _L		60 V	100 V	200 V	350 V	400 V	600 V	400 V		
	Continuous load current	I _L		A	0.55 A	0.32 A	0.18 A	0.13 A	0.12 A	0.05 A	A connection: Peak AC, DC B, C connection: DC	
				B	0.65 A	0.42 A	0.22 A	0.15 A	0.13 A	0.06 A		
	Peak load current	I _{peak}		C	0.80 A	0.60 A	0.30 A	0.17 A	0.15 A	0.08 A		
	Power dissipation	P _{out}			1.5 A	0.96 A	0.54 A	0.4 A	0.3 A	0.15 A	A connection: 100 ms (1 shot), V _L =DC	
	Total power dissipation	P _T			500 mW							
I/O isolation voltage		V _{iso}		550 mW								
Temperature limits	Operating	T _{opr}		1,500 V AC		5,000 V AC				Non-condensing at low temp.		
	Storage	T _{stg}		-40°C to +85°C -40°F to +185°F								
				-40°C to +100°C -40°F to +212°F								

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection**	AQV212(A)	AQV215(A)	AQV217(A)	AQV210(A)	AQV214(A)	AQV216(A)	AQV214H(A)	Condition	
Input	LED operate current	Typical	I _{fon}			1 mA		1.3 mA				
	Maximum	—				3 mA						
Input	LED turn off current	Minimum	I _{foff}			0.4 mA						
	Typical	—				0.79 mA		1.2 mA				
Output	LED dropout voltage	Typical	V _F			1.25 V (1.14 V at I _F = 5 mA)						
	Maximum	—				1.5 V						
Output	On resistance	Typical	R _{on}	A	0.83 Ω	2.3 Ω	11.0 Ω	23 Ω	30 Ω	70 Ω	30 Ω	
		Maximum		A	2.5 Ω	4.0 Ω	15.0 Ω	35 Ω	50 Ω	120 Ω	50 Ω	
		Typical	R _{on}	B	0.44 Ω	1.15 Ω	5.5 Ω	11.5 Ω	22.5 Ω	55 Ω	22.5 Ω	
		Maximum		B	1.25 Ω	2.0 Ω	7.5 Ω	17.5 Ω	25 Ω	100 Ω	25 Ω	
		Typical	R _{on}	C	0.25 Ω	0.6 Ω	2.8 Ω	6.0 Ω	11.3 Ω	28 Ω	11.3 Ω	
		Maximum		C	0.63 Ω	1.0 Ω	3.8 Ω	8.8 Ω	12.5 Ω	50 Ω	12.5 Ω	
Transfer characteristics	Output capacitance	Typical	C _{out}	A	150 pF	110 pF	70 pF	45 pF				
	Off state leakage current	Maximum	I _{leak}	—			1 μA				I _F = 0 mA V _B = 0 V f = 1 MHz	
Transfer characteristics	Turn on time*	Typical	T _{on}	—	0.65 ms	0.6 ms	0.25 ms	0.25 ms	0.21 ms	0.28 ms	0.6 ms	I _F = 5 mA** I _L = Max.
	Maximum	—		—	2 ms	2 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms	0.8 ms	
	Turn off time*	Typical	T _{off}	—	0.08 ms	0.06 ms	0.05 ms	0.05 ms	0.05 ms	0.04 ms	0.05 ms	I _F = 5 mA I _L = Max.
	Maximum	—		—			0.2 ms					
Transfer characteristics	I/O capacitance	Typical	C _{iso}	—			0.8 pF				f = 1 MHz V _B = 0 V	
	Maximum	—		—			1.5 pF					
Transfer characteristics	Initial I/O isolation resistance	Minimum	R _{iso}	—			1,000 MΩ				500 V DC	

*Turn on/Turn off time

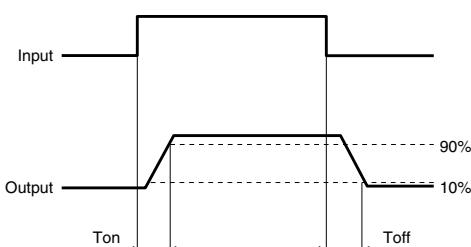

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	Standard type: 5 Reinforced type: 5 to 10	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$


Type of connection: A

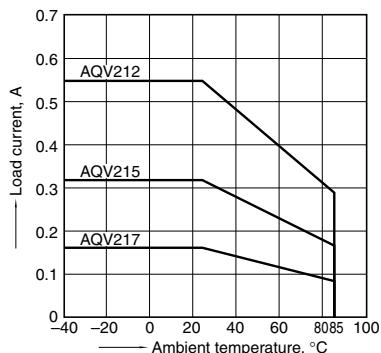

1-(2). Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A

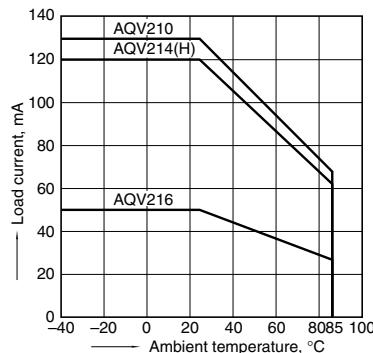


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

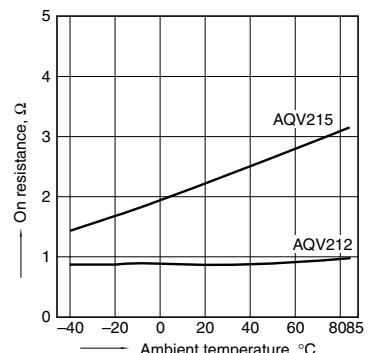


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

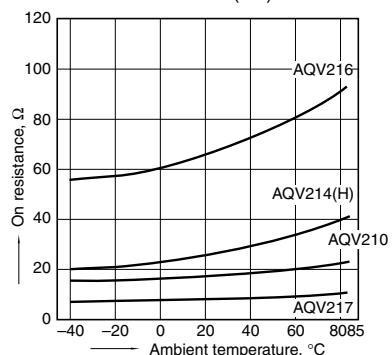


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

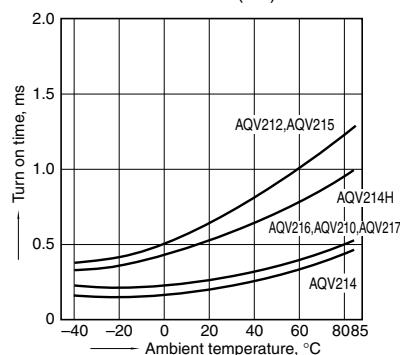


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

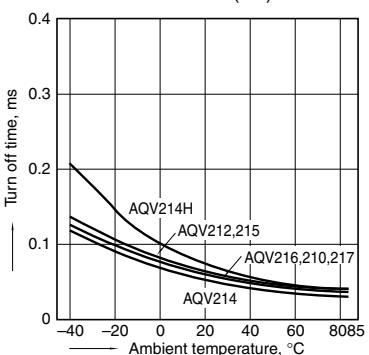


5-(1). LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

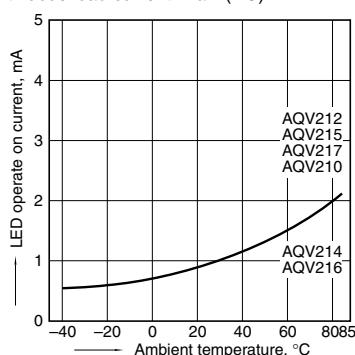


5-(2). LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

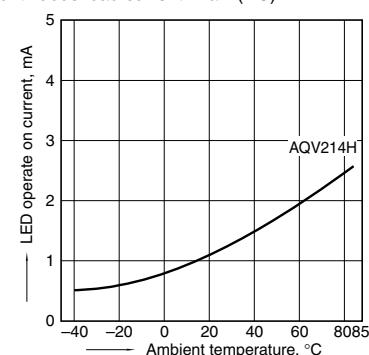

6-(1). LED turn off current vs. ambient temperature characteristics


Load voltage: Max. (DC);
Continuous load current: Max. (DC)

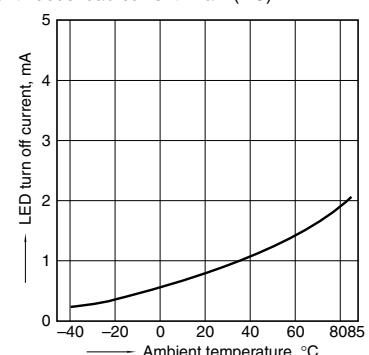

GU 1 Form A (AQV21○, AQV214H)


6-(2). LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

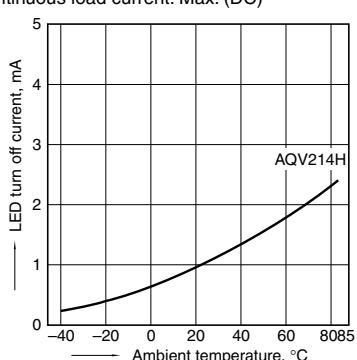


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

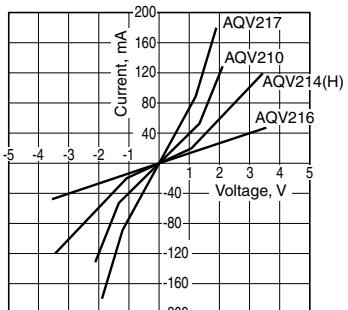


10-(1). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

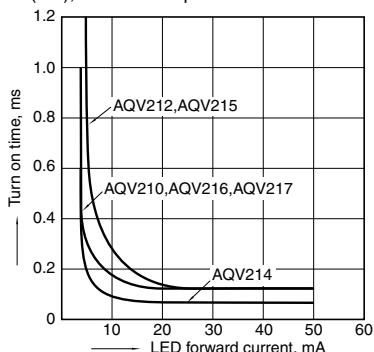


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

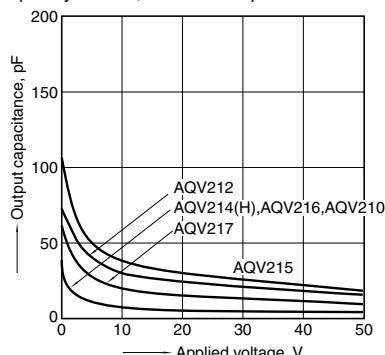


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types
LED current: 5 to 50 mA

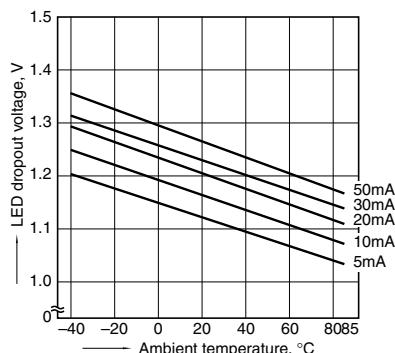


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

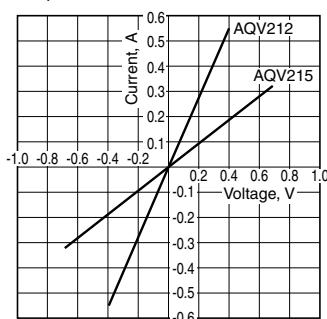


9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

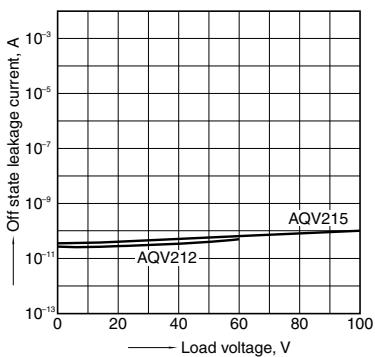


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

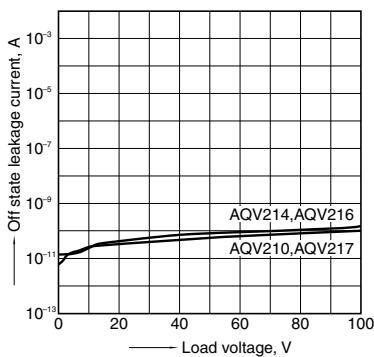

10-(2). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

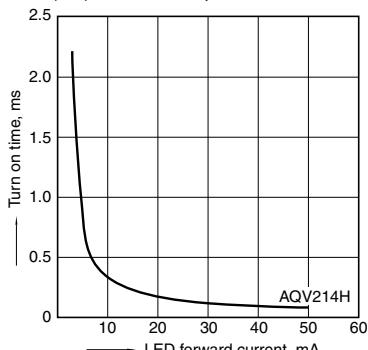

11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

