



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






<b>Miniature SOP6-pin type with high capacity of 3A load current</b>	<b>PhotoMOS<sup>®</sup> HE SOP 1 Form A High Capacity (AQV250GOS)</b>
--	---



mm inch



**RoHS compliant**

### FEATURES

- High capacity in a miniature SOP package**  
Continuous load current: Max. 3A  
Load voltage: 50V and 80V
- Greatly improved specifications allow you to use this in place of mercury and mechanical relays.**

### TYPICAL APPLICATIONS

- Security equipment
- Fire-preventing system
- Measuring instruments

### TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Surface-mount terminal			Tube	Tape and reel
				Tube packing style	Tape and reel packing style			
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	50 V	3.0 A	SOP6-pin	AQV252G2S	AQV252G2SX	AQV252G2SZ	1 tube contains: 75 pcs. 1 batch contains: 1,500 pcs.	1,000 pcs.
	80 V	1.25 A		AQV255GS	AQV255GSX	AQV255GSZ		

Note: For space reasons, the two initial letters of the part number "AQ" and the packing style indicator "X" or "Z" are not marked on the device.  
\* Indicate the peak AC and DC values.

### RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV252G2S	AQV255GS	Remarks	
Input	LED forward current	$I_F$	50 mA			
	LED reverse voltage	$V_R$	5 V			
	Peak forward current	$I_{FP}$	1 A		f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	$P_{in}$	75 mW			
Output	Load voltage (peak AC)	$V_L$	50 V	80 V		
	Continuous load current	$I_L$	A	3.0 A	1.25 A	A connection: Peak AC, DC B, C connection: DC
			B	3.5 A	1.75 A	
			C	6.0 A	2.5 A	
	Peak load current	$I_{peak}$	6 A		3 A	100ms (1 shot), $V_L = DC$ at A connection
Power dissipation	$P_{out}$	450 mW				
Total power dissipation	$P_T$	500 mW				
I/O isolation voltage	$V_{iso}$	1,500 V AC				
Temperature limits	Operating	$T_{opr}$	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures	
	Storage	$T_{stg}$	-40°C to +100°C -40°F to +212°F			


# HE SOP 1 Form A High Capacity (AQV250G0S)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV252G2S	AQV255GS	Condition
Input	LED operate current	Typical	—	0.6 mA	0.5 mA	I <sub>L</sub> = 100mA
		Maximum		3 mA		
	LED turn off current	Minimum	—	0.2 mA		I <sub>L</sub> = 100mA
Typical		0.5 mA		0.4 mA		
	LED dropout voltage	Typical	—	1.32 V (1.14 V at I <sub>F</sub> = 5 mA)		I <sub>F</sub> = 50 mA
		Maximum		1.5 V		
Output	On resistance	Typical	A	0.04 Ω	0.09 Ω	A connection I <sub>F</sub> = 5 mA, I <sub>L</sub> = Max. Within 1 s on time
		Maximum		0.07 Ω	0.15 Ω	
		Typical	B	0.025 Ω	0.05 Ω	B connection I <sub>F</sub> = 5 mA, I <sub>L</sub> = Max. Within 1 s on time
		Maximum		0.04 Ω	0.12 Ω	
		Typical	C	0.01 Ω	0.03 Ω	C connection I <sub>F</sub> = 5 mA, I <sub>L</sub> = Max. Within 1 s on time
		Maximum		0.02 Ω	0.1 Ω	
	Off state leakage current	Maximum	—	1 μA		I <sub>F</sub> = 0 mA, V <sub>L</sub> = Max.
Transfer characteristics	Turn on time*	Typical	—	1.5 ms	1.3 ms	I <sub>F</sub> = 5 mA, I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum		5 ms		
	Turn off time*	Typical	—	0.08 ms	0.1 ms	I <sub>F</sub> = 5 mA, I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum		0.5 ms		
	I/O capacitance	Typical	—	0.8 pF		f = 1 MHz V <sub>B</sub> = 0 V
		Maximum		1.5 pF		
Initial I/O isolation resistance	Minimum	—	1,000 MΩ		500 V DC	
Max. switching frequency	Maximum	—	—	2.5 times/s	5 times/s	I <sub>F</sub> = 5 mA, duty = 50% I <sub>L</sub> = Max., V <sub>L</sub> = Max.

Note: Please refer to the "Schematic and Wiring Diagrams" for connection method.

\*Turn on/Turn off time

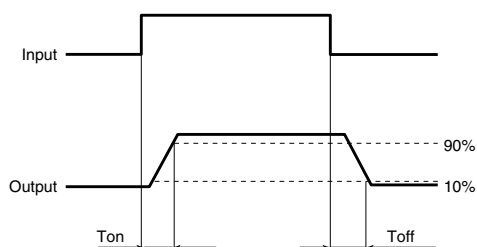

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5 to 10	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Sample: AQV252G2S  
 Allowable ambient temperature: -40°C to +85°C  
 -40°F to +185°F

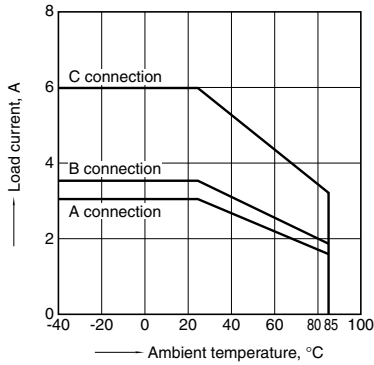


1.-(2) Load current vs. ambient temperature characteristics

Sample: AQV255GS  
 Allowable ambient temperature: -40°C to +85°C  
 -40°F to +185°F

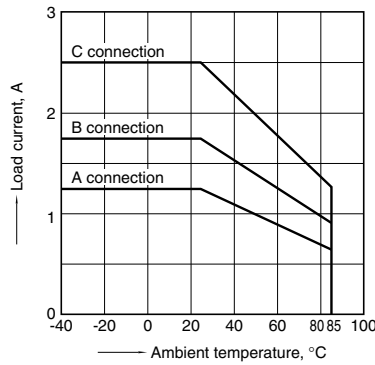


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 5 mA; Load voltage: Max. (DC)  
 Continuous load current: Max. (DC)

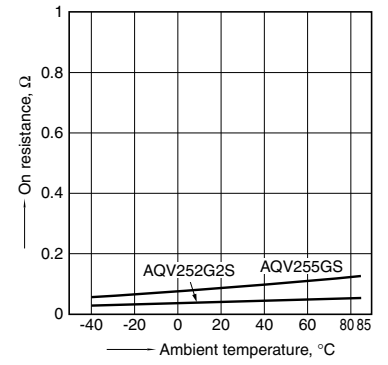


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

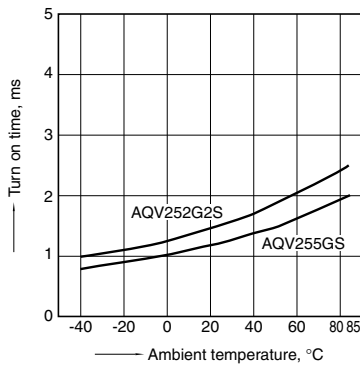


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

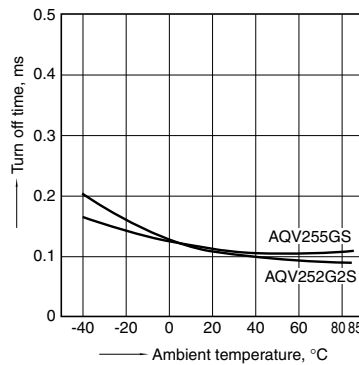


5. LED operate current vs. ambient temperature characteristics

Load voltage: 10 V (DC);  
 Continuous load current: 100mA (DC)

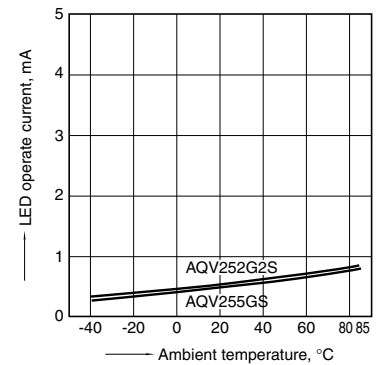


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);  
 Continuous load current: 100mA (DC)

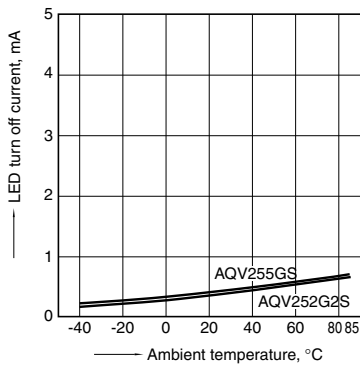


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

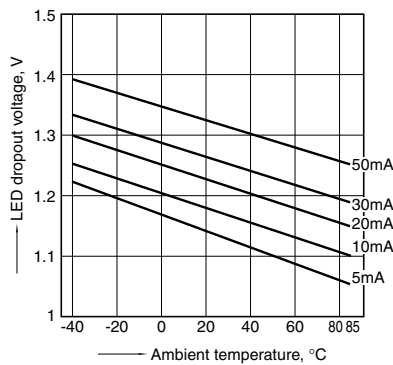

8. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 4 and 6;  
 Ambient temperature: 25°C 77°F

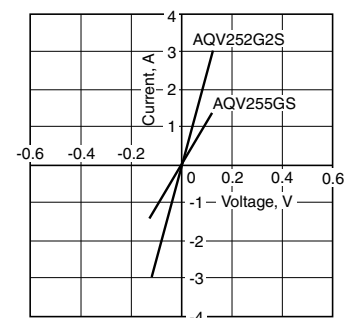

# HE SOP 1 Form A High Capacity (AQV250G0S)


## 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

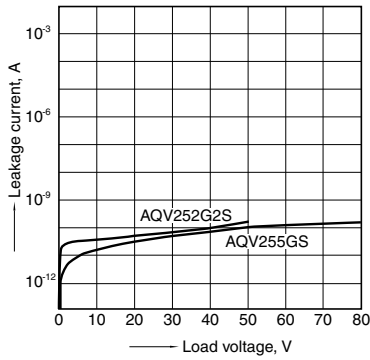


## 10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

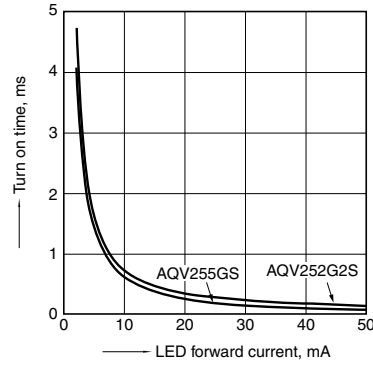


## 11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

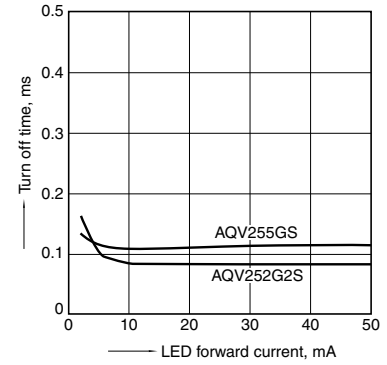

## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

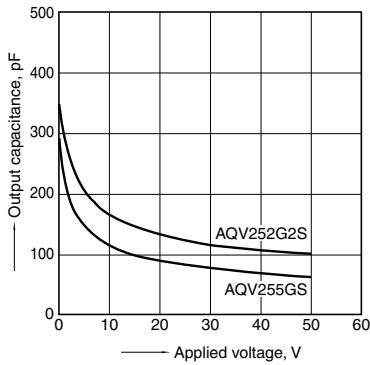

## 13. Max. switching frequency vs. load voltage and load current

LED current: 5 mA  
Ambient temperature: 25°C 77°F

