



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**Miniature SOP8-pin type
featuring low C×R
High load voltage of 250V**

**PhotoMOS®
RF SOP 2 Form A C×R
(AQW223R2S)**



mm inch



RoHS compliant

FEATURES

1. With high load voltage of 250V, low output capacitance and low on-resistance.

Output capacitance (C_{out}): 33 pF (typ.)
On-resistance (R_{on}): 11Ω (typ.)

2. 2-channel (Form A) in miniature SOP8-pin package

(W) 4.4 × (L) 9.37 × (H) 2.1 mm

(W) .173 × (L) .369 × (H) .083 inch

3. Low-level off-state leakage current of typ. 0.03 nA

4. Controls low-level analog signals

TYPICAL APPLICATIONS

1. Measuring and testing equipment
IC tester, Liquid crystal driver tester, Semiconductor performance tester, Bear board tester, In-circuit tester, Function tester, etc.

2. Telecommunication and broadcasting equipment

3. Medical equipment

4. Multi-point recorder

Warping, Thermo couple

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC dual use	250V	0.14A	SOP8-pin	AQW223R2S	AQW223R2SX	AQW223R2SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.

* Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" is not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQW223R2S	Remarks
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	5 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	250 V	
	Continuous load current	I _L	0.14 A (0.17 A)	Peak AC, DC () : in case of using only 1a (1 channel)
	Peak load current	I _{peak}	0.42 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	600 mW	
Total power dissipation		P _T	650 mW	
I/O isolation voltage		V _{iso}	1,500 V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F	


RF SOP 2 Form A C×R (AQW223R2S)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW223R2S	Condition
Input	LED operate current	Typical	0.5mA	I _L =Max.
		Maximum	3.0mA	
	LED turn off current	Minimum	0.1mA	I _L =Max.
		Typical	0.45mA	
LED dropout voltage	Typical	V _F	1.32V (1.14V at I _F =5mA)	I _F =50mA
	Maximum		1.5V	
Output	On resistance	Typical	11Ω	I _F =5mA
		Maximum	15Ω	I _L =Max.
	Output capacitance	Typical	33pF	I _F =0mA f=1 MHz V _B =0V
		Maximum	40pF	
	Off state leakage current	Typical	I _{Leak}	0.03nA
Maximum		10nA (1nA or less)*		V _L =Max.
Transfer characteristics	Turn on time**	Typical	0.15ms	I _F =5mA
		Maximum	0.5ms	I _L =Max.
	Turn off time**	Typical	0.05ms	I _F =5mA or 10mA I _L =Max.
		Maximum	0.2ms	
	I/O capacitance	Typical	0.8pF	f=1MHz V _B =0V
		Maximum	1.5pF	
Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ	500V DC

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

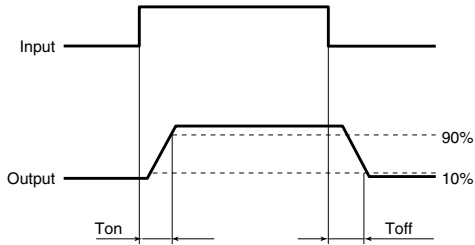

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

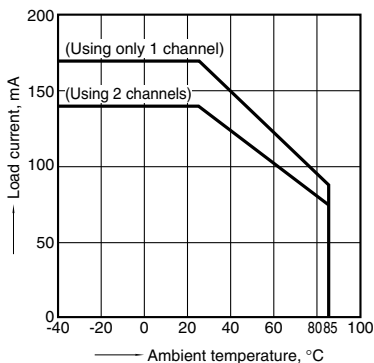


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

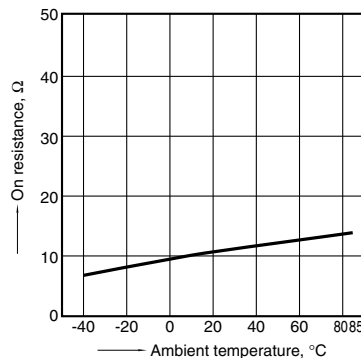


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

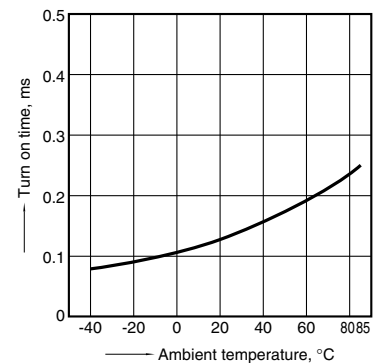


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

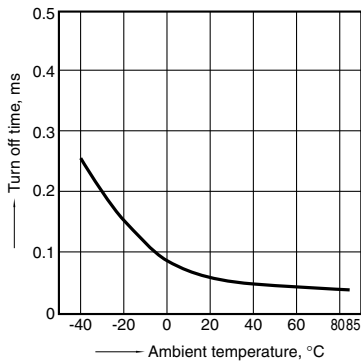


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

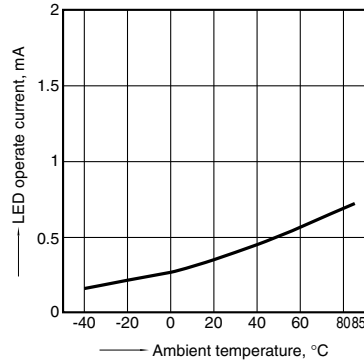


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

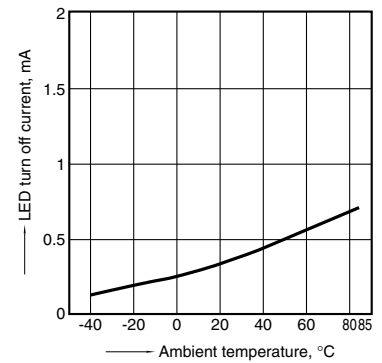


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

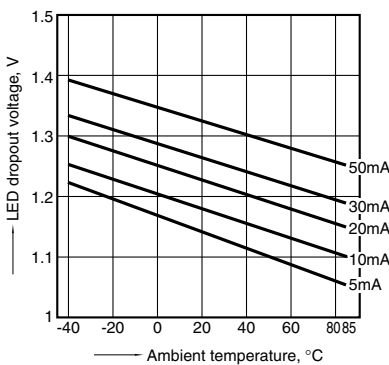


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

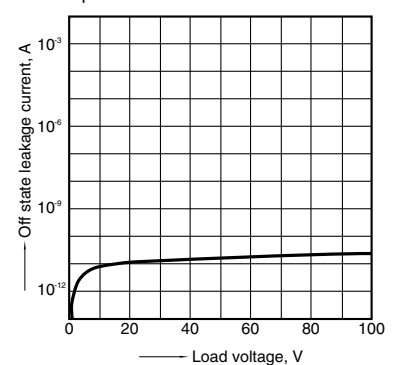


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

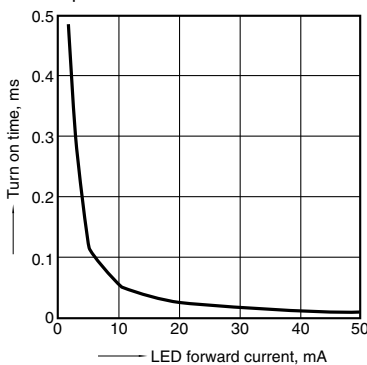

11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

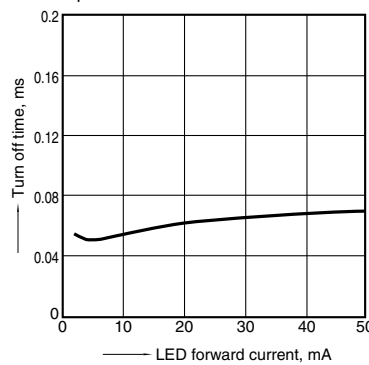

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz, 30 mVrms; Ambient temperature: 25°C 77°F

