



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





<b>Normally closed type with reinforced insulation</b>	<b>PhotoMOS® GE 2 Form B (AQW414EH)</b>
--	---

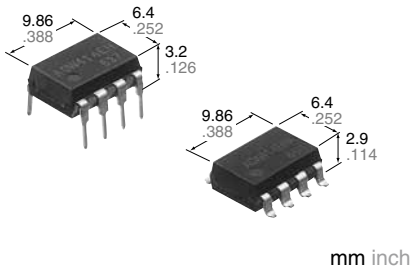

**RoHS compliant**

### FEATURES

- 1. Reinforced insulation of 5,000 V**  
More than 0.4 mm internal insulation distance between inputs and outputs. Con-forms to EN41003, EN60950 (reinforced insulation).
- 2. Applicable for 2 Form B use as well as two independent 1 Form B use**
- 3. Controls low-level analog signals**  
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 4. High sensitivity and high speed response**  
Can control max. 0.13 A load current with 5 mA input current. Fast operation speed of typ. 0.8 ms.
- 5. Low-level off state leakage current**

### TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensing equipment

### TYPES

	I/O isolation voltage	Output rating*		Package	Part No.				Packing quantity	
					Through hole terminal	Surface-mount terminal		Tube		
						Tube packing style			Tape and reel packing style	
					Load voltage	Load current		Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side	
AC/DC dual use	Reinforced 5,000 V	400 V	100 mA	DIP8-pin	AQW414EH	AQW414EHA	AQW414EHAX	AQW414EHAZ	1 tube contains : 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW414EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50mA	
	LED reverse voltage	V <sub>R</sub>	5V	
	Peak forward current	I <sub>FP</sub>	1A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	400 V	
	Continuous load current	I <sub>L</sub>	0.1 A (0.13 A)	Peak AC, DC ( ) : in case of using only 1 channel.
	Peak load current	I <sub>peak</sub>	0.3 A	100 ms (1 shot), V <sub>L</sub> = DC
Power dissipation		P <sub>out</sub>	800mW	
Total power dissipation		P <sub>T</sub>	850mW	
I/O isolation voltage		V <sub>iso</sub>	5,000 V AC	
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F	

# GE 2 Form B (AQW414EH)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW414EH(A)	Condition
Input	LED operate (OFF) current	Typical	1.3mA	I <sub>L</sub> =Max.
		Maximum	3.0mA	
	LED reverse (ON) current	Minimum	0.4mA	I <sub>L</sub> =Max.
		Typical	1.2mA	
LED dropout voltage	Typical	V <sub>F</sub>	1.25 (1.14 V at I <sub>F</sub> =5mA)	I <sub>F</sub> =50mA
	Maximum		1.5V	
Output	On resistance	Typical	26Ω	I <sub>F</sub> =0mA I <sub>L</sub> =Max. Within 1 s on time
		Maximum	35Ω	
	Off state leakage current	Maximum	I <sub>Leak</sub>	10μA
Transfer characteristics	Operate (OFF) time*	Typical	0.8ms	I <sub>F</sub> =0mA → 5mA I <sub>L</sub> =Max.
		Maximum	3.0ms	
	Reverse (ON) time*	Typical	0.2ms	I <sub>F</sub> =5mA → 0mA I <sub>L</sub> =Max.
		Maximum	1.0ms	
	I/O capacitance	Typical	C <sub>iso</sub>	0.8pF
Maximum		1.5pF		
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000MΩ	500V DC

\*Operate/Reverse time

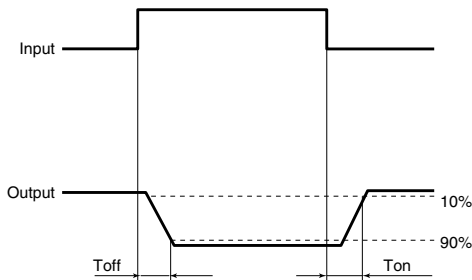

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5 to 10	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

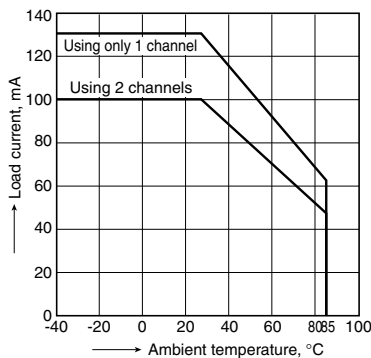


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 0 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

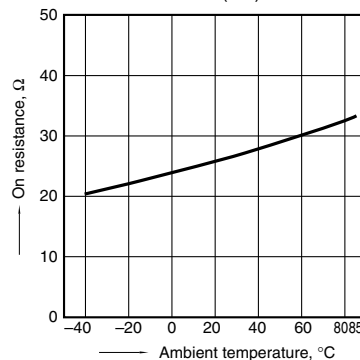


3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

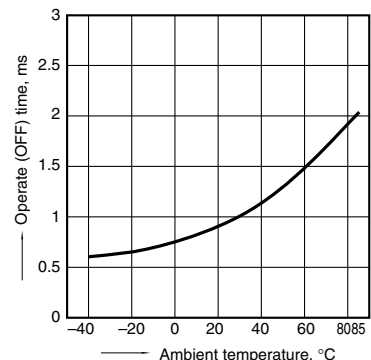


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

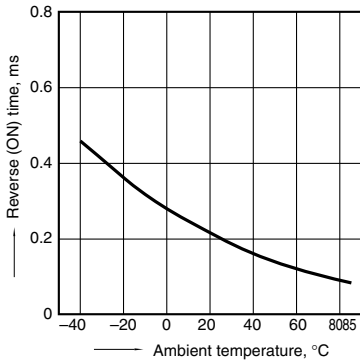


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

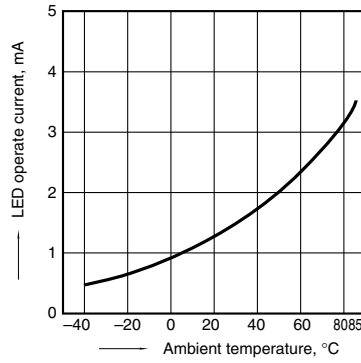


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

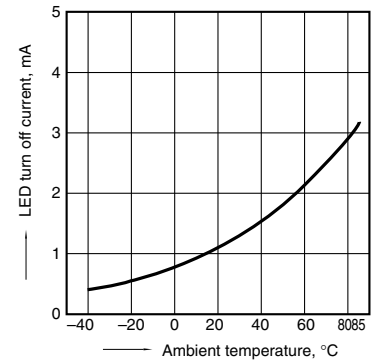


7. LED dropout voltage vs. ambient temperature characteristics;

LED current: 5 to 50 mA

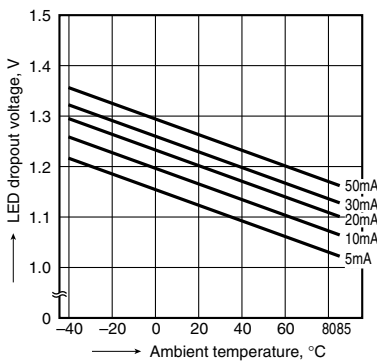


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

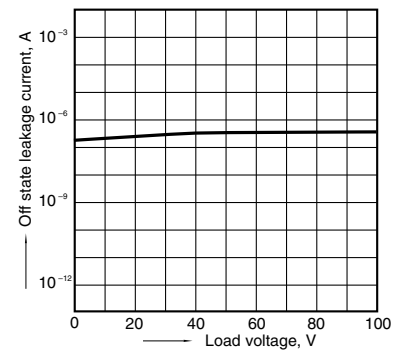


10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

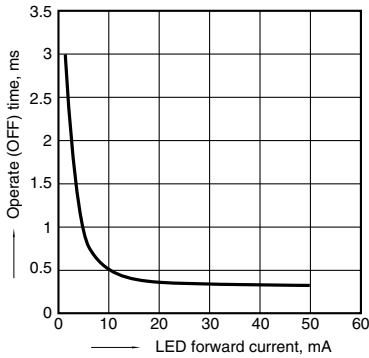

11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

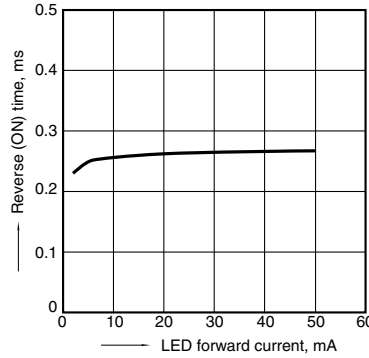

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

