



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Both NO and NC contacts incorporated in a compact DIP8-pin Reinforced insulation

**PhotoMOS®
GE 1 Form A & 1 Form B (AQW610EH)**

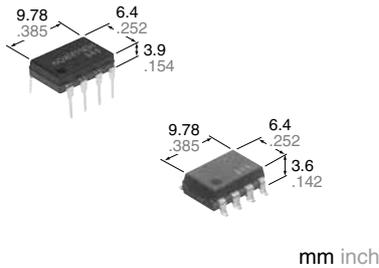

RoHS compliant

FEATURES

1. 60V type couples high capacity (0.5A) with low on-resistance (typ. 1Ω).
2. Reinforced insulation 5,000 V
More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).
3. Approx. 1/2 the space compared with the mounting area of a set of 1 Form A and 1 Form B PhotoMOS
4. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use
5. Controls low-level analog signals
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

6. High sensitivity and high speed response

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of typ. 0.5 ms [N.O.] (AQW610EH).

7. Low-level off-state leakage current

TYPICAL APPLICATIONS

- Power supply
- Measuring instruments
- Security equipment
- Modem
- Telephone equipment
- Electricity, plant equipment
- Sensing equipment

TYPES

	I/O isolation voltage	Output rating*		Package	Part No.				Packing quantity	
					Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
		Tube packing style				Tape and reel packing style				
		Load voltage	Load current		Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side				
AC/DC dual use	Reinforced 5,000 V	60 V	500 mA	DIP8-pin	AQW612EH	AQW612EHA	AQW612EHAX	AQW612EHAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
		350 V	120 mA		AQW610EH	AQW610EHA	AQW610EHAX	AQW610EHAZ		
		400 V	100 mA		AQW614EH	AQW614EHA	AQW614EHAX	AQW614EHAZ		

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Remarks
Input	LED forward current	I _F	50 mA			
	LED reverse voltage	V _R	5 V			
	Peak forward current	I _{FP}	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW			
Output	Load voltage (peak AC)	V _L	60 V	350 V	400 V	
	Continuous load current	I _L	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A)	Peak AC, DC (): in case of using only 1a or 1b, 1 channel
	Peak load current	I _{peak}	1.5 A	0.36 A	0.3 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW			
Total power dissipation		P _T	850 mW			
I/O isolation voltage		V _{iso}	5,000 V AC			
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F			

GE 1 Form A & 1 Form B (AQW610EH)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Condition	
Input	LED operate current	Typical	1.4 mA			I _L =Max.	
		Maximum	3.0 mA				
	LED reverse current	Minimum	0.4 mA			I _L =Max.	
		Typical	1.3 mA				
LED dropout voltage	Typical	V _F	1.25 (1.14 V at I _F = 5 mA)			I _F =50 mA	
	Maximum		1.5 V				
Output	On resistance	Typical	1Ω	18Ω	26Ω	I _F =5mA (N.O.) I _F = 0mA (N.C.) I _L = Max. Within 1 s on time	
		Maximum	2.5Ω	25Ω	35Ω		
	Off state leakage current	Maximum	1μA (N.O.), 10μA (N.C.)			I _F =0 mA (N.O.) I _F = 5 mA (N.C.) V _L = Max.	
Transfer characteristics	Operate time*	Typical	T _{on} (N.O.) 3.0 ms (N.C.)	0.5 ms (N.O.) 1.0 ms (N.C.)	0.5 ms (N.O.) 0.8 ms (N.C.)	I _F = 0 mA → 5 mA I _L = Max.	
		Maximum	4.0 ms (N.O.) 10.0 ms (N.C.)	3.0 ms			
	Reverse time*	Typical	T _{off} (N.O.) T _{on} (N.C.)	0.05ms (N.O.), 0.2ms (N.C.)	0.08ms (N.O.), 0.3ms (N.C.)	0.08ms (N.O.), 0.2ms (N.C.)	I _F = 5 mA → 0 mA I _L = Max.
		Maximum	1.0ms				
	I/O capacitance	Typical	C _{iso}	0.8 pF			f = 1MHz
	Maximum		1.5 pF			V _B = 0 V	
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ			500 V DC

*Operate/Reverse time

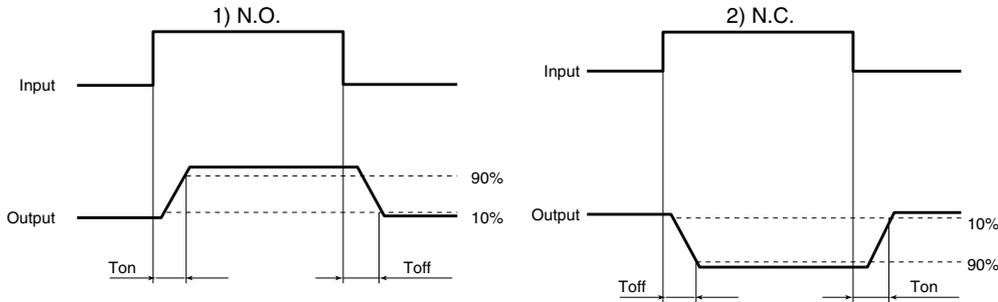

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5 to 10	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

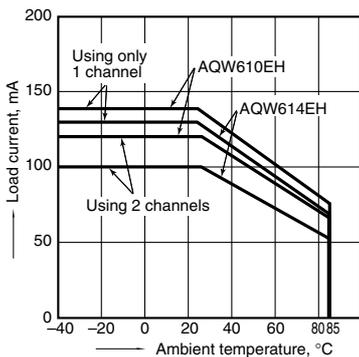


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

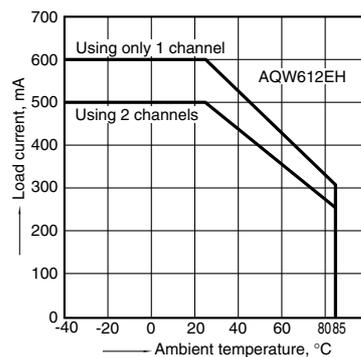


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage; Max. (DC)
Continuous load current: Max. (DC)

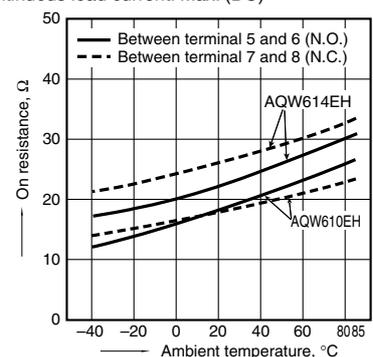


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

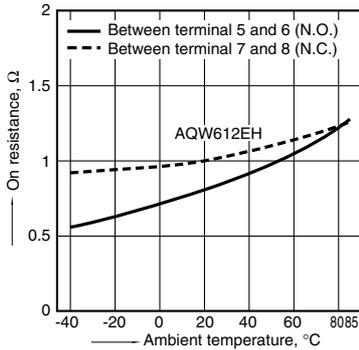


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

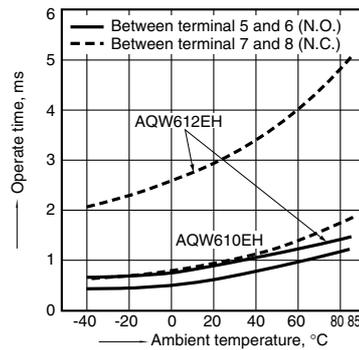


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

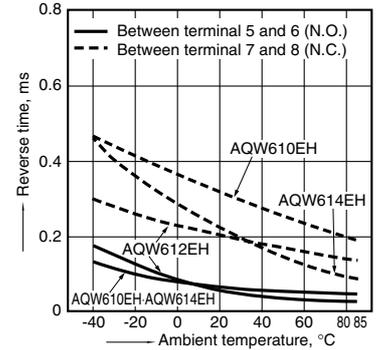


5. LED operate current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

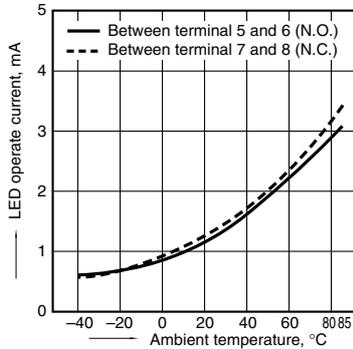


6. LED reverse current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

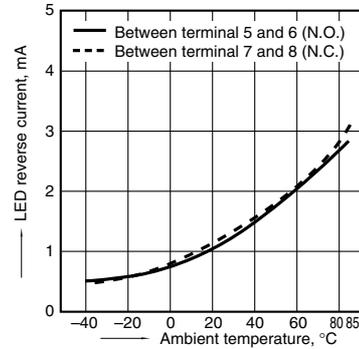


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

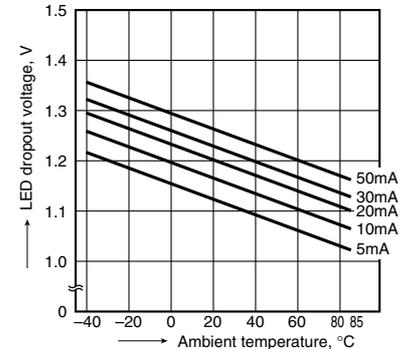


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

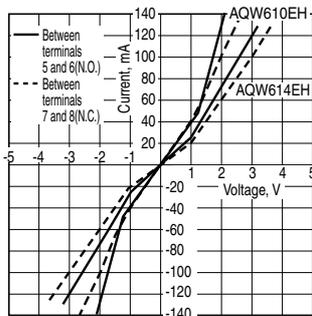


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

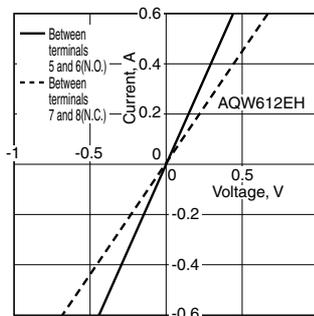


9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

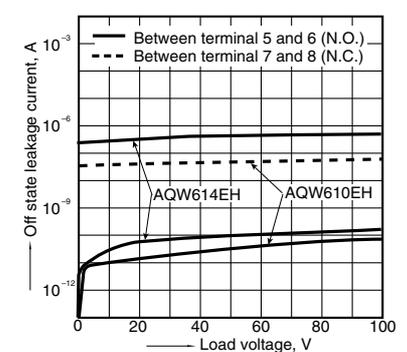


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

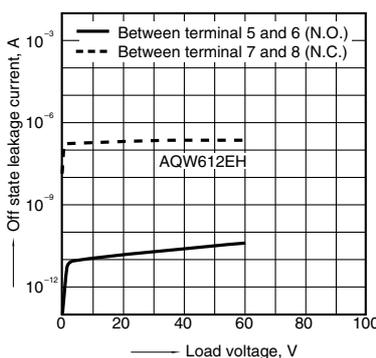


10-(1). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

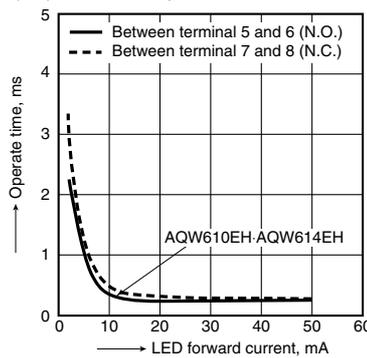

10-(2). Operate time vs. LED forward current characteristics


Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

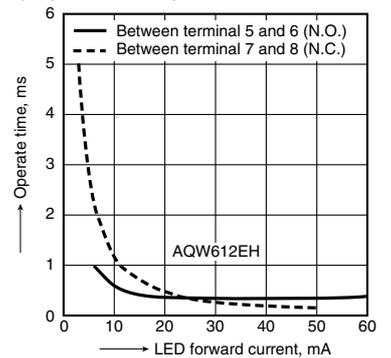

GE 1 Form A & 1 Form B (AQW61EH)


11-(1). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: Max. (DC); Continuous load current:
 Max. (DC); Ambient temperature: 25°C 77°F

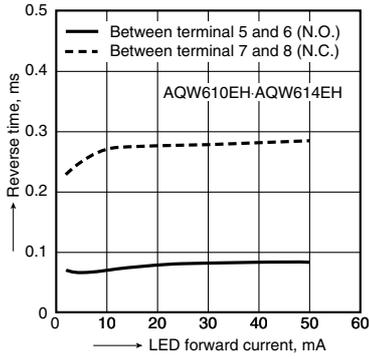


11-(2). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: Max. (DC); Continuous load current:
 Max. (DC); Ambient temperature: 25°C 77°F

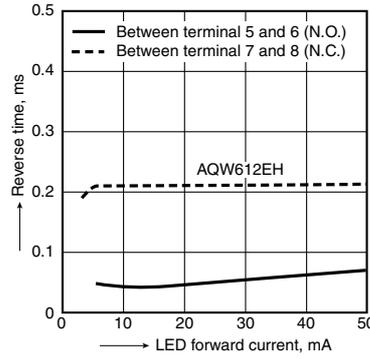

12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

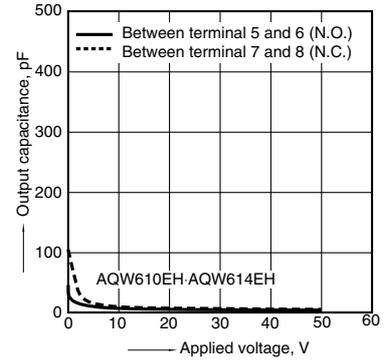

12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

