



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




### Miniature SOP4-pin with C×R10 40V load voltage

PhotoMOS®  
RF SOP 1 Form A C×R10  
(AQY221○2S)



mm inch



RoHS compliant

### FEATURES

**1. Both low on-resistance (R type) and low capacitance (C type) available at excellent characteristics of C×R10**

|                           | AQY221R2S<br>(R type) | AQY221N2S<br>(C type) |
|---------------------------|-----------------------|-----------------------|
| Low on resistance: R      | 0.8Ω                  | 9.5Ω                  |
| Low output capacitance: C | 13pF                  | 1pF                   |

**2. High speed switching**

Turn on time: 0.03ms (typ.)

Turn off time: 0.03ms (typ.)

(AQY221N2S)

**3. Small profile of miniature SOP4-pin**

**4. Low-level off state leakage current of typ. 0.01nA (AQY221N2S)**

### TYPICAL APPLICATIONS

**1. Measuring and testing equipment**  
IC tester, Liquid crystal driver tester, Semiconductor performance tester, Bare board tester, In-circuit tester, Function tester, etc.

**2. Telecommunication and broadcasting equipment**

**3. Medical equipment**

Ultrasonic wave diagnostic machine

**4. Multi-point recorder**

Warping, Thermo couple, etc.

### TYPES

|                | Type                       | Output rating* |              | Package  | Part No.           |                              |                              | Packing quantity  |               |
|----------------|----------------------------|----------------|--------------|----------|--------------------|------------------------------|------------------------------|---|---------------|
|                |                            | Load voltage   | Load current |          | Tube packing style | Tape and reel packing style  |                              | Tube  | Tape and reel |
|                |                            |                |              |          |                    | Picked from the 1/2-pin side | Picked from the 3/4-pin side |   |               |
| AC/DC dual use | Low on resistance (R type) | 40V            | 250mA        | SOP4-pin | AQY221R2S          | AQY221R2SX                   | AQY221R2SZ                   | 1 tube contains: 100 pcs.<br>1 batch contains: 2,000 pcs. | 1,000 pcs.    |
|                | Low capacitance (C type)   | 40V            | 120mA        |          | AQY221N2S          | AQY221N2SX                   | AQY221N2SZ                   |   |               |

\* Indicate the peak AC and DC values.

Note: For space reasons, the initial letters of the part number "AQY", the package (SOP) indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number AQY221R2SX is 221R2)

### RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                         | Symbol            | AQY221R2S<br>(R type)           | AQY221N2S<br>(C type) | Remarks                              |
|-------------------------|-------------------------|-------------------|---------------------------------|-----------------------|--------------------------------------|
| Input                   | LED forward current     | I <sub>F</sub>    | 50mA                            |                       |                                      |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5V                              |                       |                                      |
|                         | Peak forward current    | I <sub>FP</sub>   | 1A                              |                       | f=100 Hz, Duty factor=0.1%           |
|                         | Power dissipation       | P <sub>in</sub>   | 75mW                            |                       |                                      |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 40V                             |                       |                                      |
|                         | Continuous load current | I <sub>L</sub>    | 0.25A                           | 0.12A                 | Peak AC, DC                          |
|                         | Peak load current       | I <sub>peak</sub> | 0.75A                           | 0.30A                 | 100 ms (1 shot), V <sub>L</sub> = DC |
|                         | Power dissipation       | P <sub>out</sub>  | 300mW                           |                       |                                      |
| Total power dissipation |                         | P <sub>T</sub>    | 350mW                           |                       |                                      |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 500V AC                         | 1,500V AC             |                                      |
| Temperature limits      | Operating               | T <sub>opr</sub>  | -40°C to +85°C -40°F to +185°F  |                       | Non-condensing at low temperatures   |
|                         | Storage                 | T <sub>stg</sub>  | -40°C to +100°C -40°F to +212°F |                       |                                      |


# RF SOP 1 Form A C×R10 (AQY221○2S)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                             |                           | Symbol                                   | AQY221R2S (R type) | AQY221N2S (C type) | Condition  |
|----------------------------------|---------------------------|--|--------------------|--------------------|--|
| Input                            | LED operate current       | Typical                                  | 0.5 mA             | 0.9 mA             | $I_L = 250 \text{ mA}$ (R type)<br>$I_L = 80 \text{ mA}$ (C type)  |
|                                  |                           | Maximum                                  | 3.0 mA             |                    |  |
|                                  | LED turn off current      | Minimum                                  | 0.1 mA             | 0.2 mA             | $I_L = 250 \text{ mA}$ (R type)<br>$I_L = 80 \text{ mA}$ (C type)  |
|                                  |                           | Typical                                  | 0.4 mA             | 0.85 mA            |  |
| LED dropout voltage              | Typical                   | 1.25 V (1.14 V at $I_F = 5 \text{ mA}$ ) |                    |                    | $I_F = 50 \text{ mA}$  |
|                                  | Maximum                   | 1.5 V                                    |                    |                    |  |
| Output                           | On resistance             | Typical                                  | 0.8Ω               | 9.5Ω               | $I_F = 5 \text{ mA}$<br>$I_L = 250 \text{ mA}$ (R type),<br>$I_L = 80 \text{ mA}$ (C type)<br>Within 1 s on time |
|                                  |                           | Maximum                                  | 1.25Ω              | 12.5Ω              |  |
|                                  | Output capacitance        | Typical                                  | 13 pF              | 1.0 pF             | $I_F = 0 \text{ mA}$<br>$V_B = 0 \text{ V}$<br>$f = 1 \text{ MHz}$   |
|                                  |                           | Maximum                                  | 18 pF              | 1.5 pF             |  |
|                                  | Off state leakage current | Typical                                  | 0.03 nA            | 0.01 nA            | $I_F = 0 \text{ mA}$<br>$V_L = \text{Max.}$  |
| Maximum                          |                           | 10 nA (1 nA or less)*                    |                    |                    |  |
| Transfer characteristics         | Turn on time**            | Typical                                  | 0.1 ms             | 0.03 ms            | $I_F = 5 \text{ mA}$<br>$V_L = 10 \text{ V}$<br>$R_L = 40 \Omega$ (R type),<br>125Ω (C type)                     |
|                                  |                           | Maximum                                  | 0.5ms              |                    |  |
|                                  | Turn off time**           | Typical                                  | 0.06 ms            | 0.03 ms            | $I_F = 5 \text{ mA}$<br>$V_L = 10 \text{ V}$<br>$R_L = 40 \Omega$ (R type),<br>125Ω (C type)                     |
|                                  |                           | Maximum                                  | 0.2 ms             |                    |  |
|                                  | I/O capacitance           | Typical                                  | 0.8 pF             |                    | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$   |
| Maximum                          |                           | 1.5 pF                                   |                    |                    |  |
| Initial I/O isolation resistance | Minimum                   | $R_{iso}$                                | 1,000MΩ            | 500 V DC           |  |

\*Available as custom orders (1 nA or less)

\*\*Turn on/Turn off time

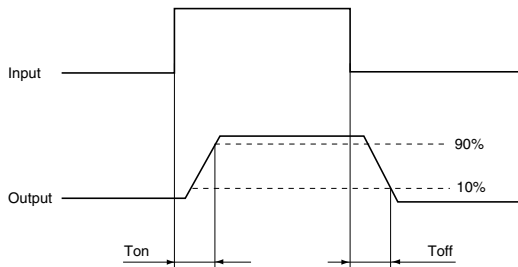

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

| Item              | Symbol | Recommended value | Unit |
|-------------------|--------|-------------------|------|
| Input LED current | $I_F$  | 5                 | mA   |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

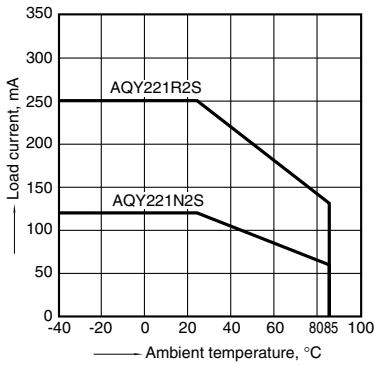


### 2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

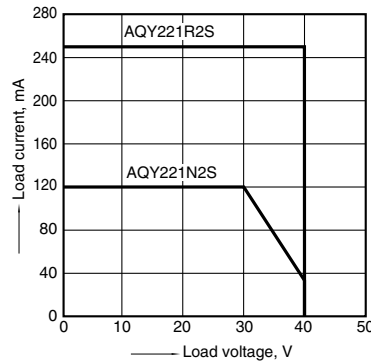


### 3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: Max. (DC);  
Load current: 250mA (DC) [R type], 80mA (DC) [C type]

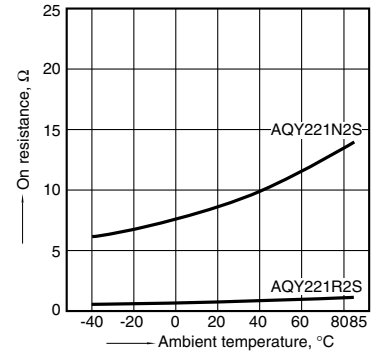


### 4. Turn on time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) [R type],  
80mA (DC) [C type]

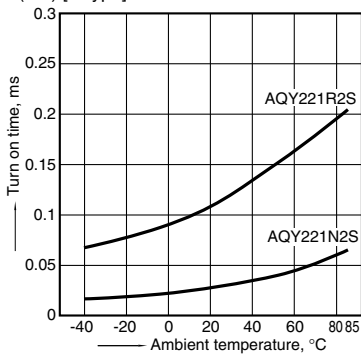


### 5. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) [R type],  
80mA (DC) [C type]

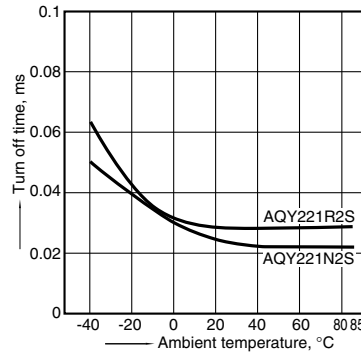


### 6. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
Continuous load current: 250mA (DC) [R type],  
80mA (DC) [C type]

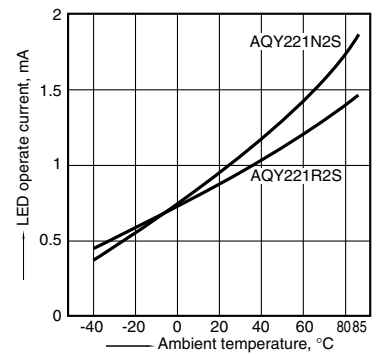


### 7. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current:  
250mA (DC) [R type], 80mA (DC) [C type];

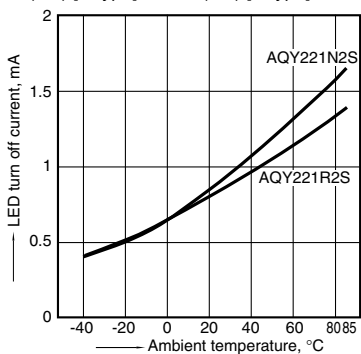


### 8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

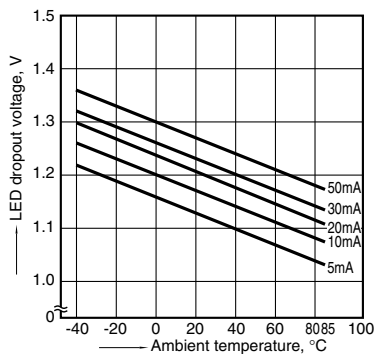

### 9. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

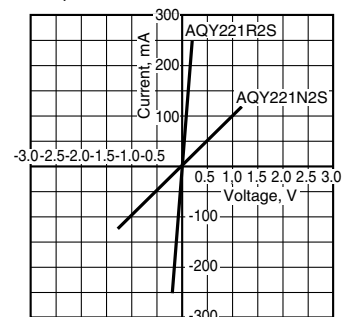

# RF SOP 1 Form A C×R10 (AQY221○2S)


## 10. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

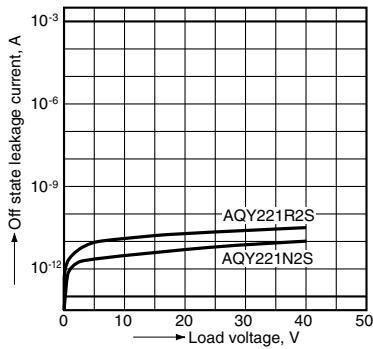


## 11. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC); Continuous load current: 250mA (DC) [R type], 80mA (DC) [C type];  
Ambient temperature: 25°C 77°F

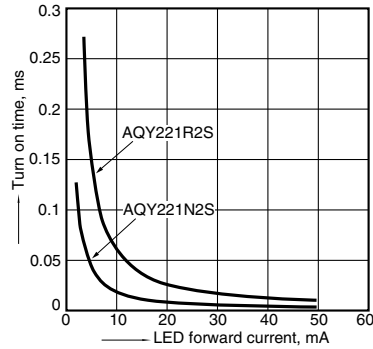


## 12. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC); Continuous load current: 250mA (DC) [R type], 80mA (DC) [C type];  
Ambient temperature: 25°C 77°F

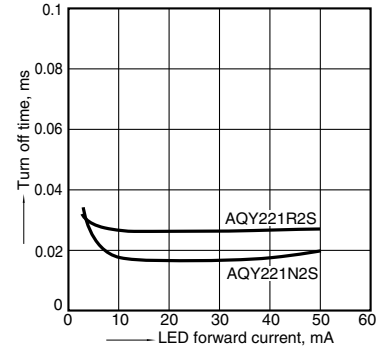


## 13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4  
Frequency: 1 MHz, 30m Vrms; Ambient temperature: 25°C 77°F

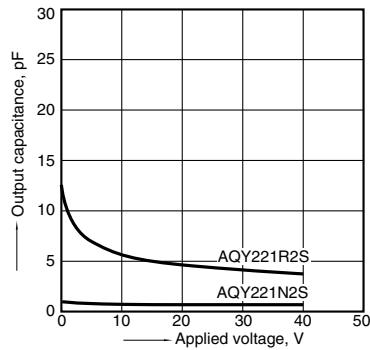

## 14. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

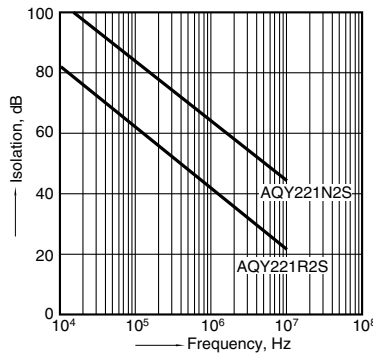

## 15. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

