



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

**Flat Power-DIP4-pin type  
with high capacity  
up to 2A load current**


**PhotoMOS®**

**PD 1 Form A  
(AQY27O)**

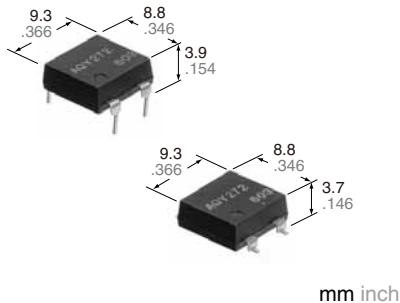

### FEATURES

1. **Flat-Packaged type**  
(W) 8.8 × (D) 9.3 × (H) 3.9 mm  
(W) .346 × (D) .366 × (H) .154 inch
2. **High capacity of continuous load current 2A (AQY272)**
3. **High sensitivity and low on-resistance**  
Max. 2A load can be controlled with 5mA input current. The on-resistance is low at typ. 0.11Ω (AQY272).



### TYPICAL APPLICATIONS

- Measuring and Testing equipment
- IC Testers and Board Testers
- High speed inspection machines

**RoHS compliant**

### TYPES

| Type              | Output rating* |              | Package        | Part No.              |                        |                             | Packing quantity   |  |  |
|-------------------|----------------|--------------|----------------|-----------------------|------------------------|-----------------------------|--|--|--|
|                   | Load voltage   | Load current |                | Through hole terminal | Surface-mount terminal |                             |  |  |  |
|                   |                |              |                | Tube packing style    |                        | Tape and reel packing style |  |  |  |
| AC/DC<br>dual use | 60V            | 2.0A         | Power-DIP4-pin | AQY272                | AQY272A                | AQY272AX                    | AQY272AZ   |  |  |
|                   | 100V           | 1.3A         |                | AQY275                | AQY275A                | AQY275AX                    | AQY275AZ   |  |  |
|                   | 200V           | 0.65A        |                | AQY277                | AQY277A                | AQY277AX                    | AQY277AZ   |  |  |
|                   | 400V           | 0.35A        |                | AQY274                | AQY274A                | AQY274AX                    | AQY274AZ   |  |  |
|                   |                |              |                |                       |                        |                             | 1 tube contains:<br>50 pcs.<br>1 batch contains:<br>1,000 pcs. |  |  |

\* Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                         | Symbol            | AQY272(A)                       | AQY275(A)  | AQY277(A) | AQY274(A)                          | Remarks                             |
|-------------------------|-------------------------|-------------------|---------------------------------|------------|-----------|------------------------------------|-------------------------------------|
| Input                   | LED forward current     | I <sub>F</sub>    |                                 | 50 mA      |           |                                    |                                     |
|                         | LED reverse voltage     | V <sub>R</sub>    |                                 | 5 V        |           |                                    |                                     |
|                         | Peak forward current    | I <sub>FP</sub>   |                                 | 1 A        |           |                                    | f = 100 Hz, Duty factor = 0.1%      |
|                         | Power dissipation       | P <sub>in</sub>   |                                 | 75 mW      |           |                                    |                                     |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 60 V                            | 100 V      | 200 V     | 400 V                              |                                     |
|                         | Continuous load current | I <sub>L</sub>    | 2.0 A                           | 1.3 A      | 0.65 A    | 0.35 A                             | Peak AC, DC                         |
|                         | Peak load current       | I <sub>peak</sub> | 6.0 A                           | 4.0 A      | 2.0 A     | 1.0 A                              | 100ms (1 shot), V <sub>L</sub> = DC |
|                         | Power dissipation       | P <sub>out</sub>  |                                 | 700 mW     |           |                                    |                                     |
| Total power dissipation |                         | P <sub>T</sub>    |                                 | 750 mW     |           |                                    |                                     |
| I/O isolation voltage   |                         | V <sub>iso</sub>  |                                 | 2,500 V AC |           |                                    |                                     |
| Temperature limits      | Operating               | T <sub>opr</sub>  | -40°C to +85°C -40°F to +185°F  |            |           | Non-condensing at low temperatures |                                     |
|                         | Storage                 | T <sub>stg</sub>  | -40°C to +100°C -40°F to +212°F |            |           |                                    |                                     |

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol             | AQY272(A)  | AQY275(A)                                 | AQY277(A) | AQY274(A)  | Condition |
|--------------------------|----------------------------------|--------------------|------------|---|-----------|--|-----------|
| Input                    | LED operate current              | Typical<br>Maximum | $I_{Fon}$  | 1.0 mA                                    |           | $I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$   |           |
|                          |                                  |                    |            | 3.0 mA                                    |           |  |           |
| Input                    | LED turn off current             | Minimum<br>Typical | $I_{Foff}$ | 0.4 mA                                    |           | $I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$   |           |
|                          |                                  |                    |            | 0.9 mA                                    |           |  |           |
| Input                    | LED dropout voltage              | Typical<br>Maximum | $V_F$      | 1.25 V (1.16 V at $I_F = 10 \text{ mA}$ ) |           | $I_F = 50 \text{ mA}$  |           |
|                          |                                  |                    |            | 1.5 V                                     |           |  |           |
| Output                   | On resistance                    | Typical<br>Maximum | $R_{on}$   | 0.11 Ω                                    | 0.23 Ω    | 0.7 Ω  | 2.1 Ω     |
|                          |                                  |                    |            | 0.18 Ω                                    | 0.34 Ω    | 1.1 Ω  | 3.2 Ω     |
| Output                   | Off state leakage current        | Maximum            | $I_{Leak}$ | 10 μA                                     |           | $I_F = 0 \text{ mA}, V_L = \text{Max.}$  |           |
|                          |                                  |                    |            | 2.46 ms                                   | 2.40 ms   | 1.12 ms  | 1.65 ms   |
| Transfer characteristics | Turn on time*                    | Typical<br>Maximum | $T_{on}$   | 5.0 ms                                    |           | $I_F = 10 \text{ mA}, I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$                        |           |
|                          |                                  |                    |            | 5.64 ms                                   | 5.65 ms   | 2.57 ms  | 3.88 ms   |
| Transfer characteristics | Turn off time*                   | Typical<br>Maximum | $T_{off}$  | 10.0 ms                                   |           |  |           |
|                          |                                  |                    |            | 0.22 ms                                   | 0.21 ms   | 0.10 ms  | 0.08 ms   |
| Transfer characteristics | I/O capacitance                  | Typical<br>Maximum | $C_{iso}$  | 0.8 pF                                    |           | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$   |           |
|                          |                                  |                    |            | 1.5 pF                                    |           |  |           |
| Transfer characteristics | Initial I/O isolation resistance | Minimum            | $R_{iso}$  | 1,000 MΩ                                  |           | 500 V DC   |           |
|                          |                                  |                    |            |   |           |  |           |
| Transfer characteristics | Maximum operating speed          | Maximum            | —          | 0.5 cps                                   |           | $I_F = 10 \text{ mA}, \text{Duty factor} = 50\%$<br>$I_L = \text{Max.}, V_L = \text{Max.}$ |           |

\*Turn on/Turn off time

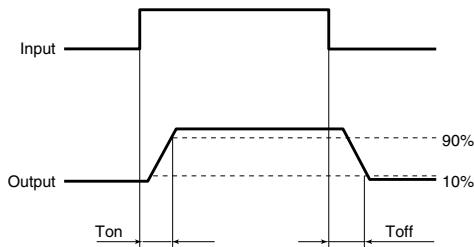

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

| Item              | Symbol | Recommended value | Unit |
|-------------------|--------|-------------------|------|
| Input LED current | $I_F$  | 5 to 10           | mA   |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

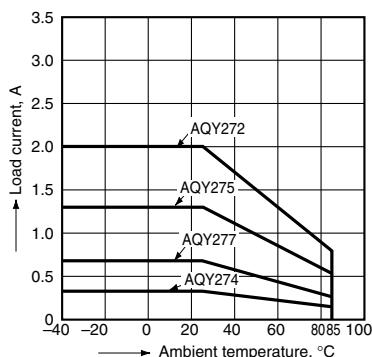


### 2.- (1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 2.0 A (DC) (AQY272),  
1.3 A (DC) (AQY275)

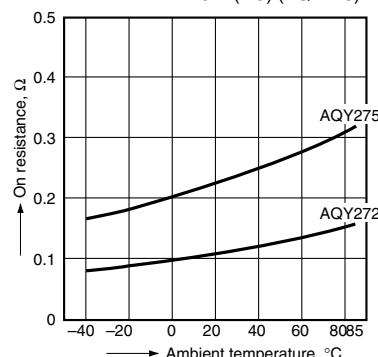


### 2.- (2) On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 0.65 A (DC) (AQY277),  
0.35 A (DC) (AQY274)

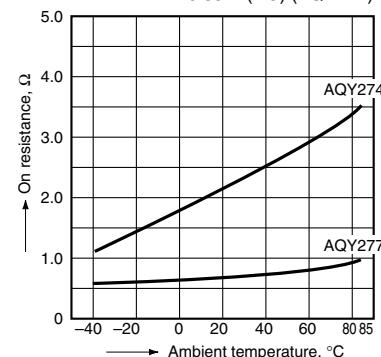


**3. Turn on time vs. ambient temperature characteristics**

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

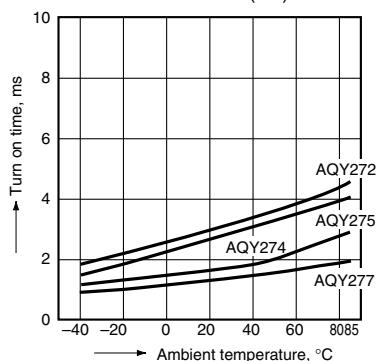


**4. Turn off time vs. ambient temperature characteristics**

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

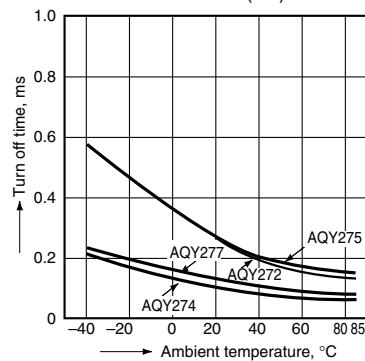


**5. LED operate vs. ambient temperature characteristics**

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

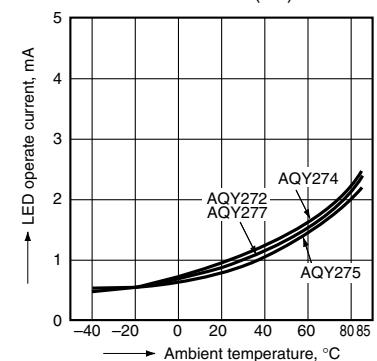


**6. LED turn off current vs. ambient temperature characteristics**

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

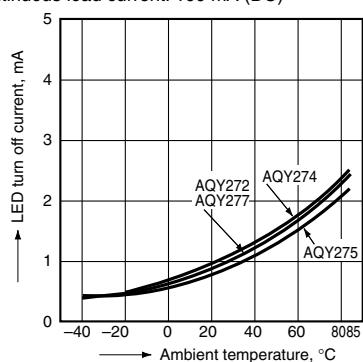


**7. LED dropout voltage vs. ambient temperature characteristics**

Sample: all types; LED current: 5 to 50 mA

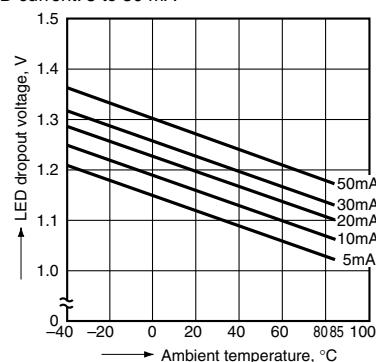


**8. Current vs. voltage characteristics of output at MOS portion**

Ambient temperature: 25°C 77°F

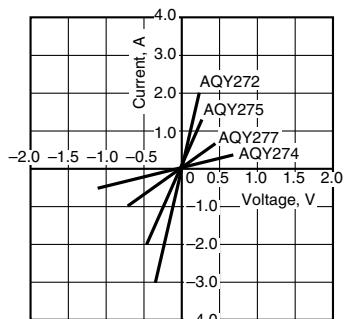


**9.-1 Off state leakage current vs. load voltage characteristics**

Ambient temperature: 25°C 77°F

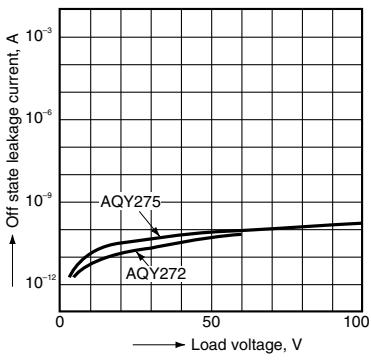


**9.-2 Off state leakage current vs. load voltage characteristics**

Ambient temperature: 25°C 77°F

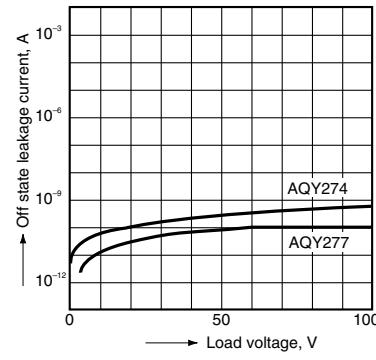


**10. Turn on time vs. LED forward current characteristics**

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

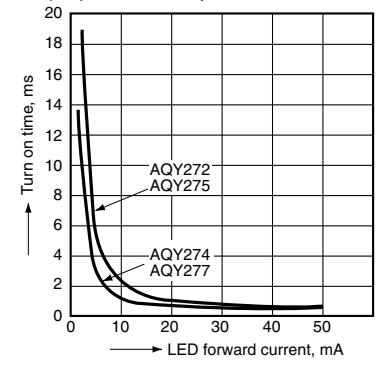


**11. Turn off time vs. LED forward current characteristics**

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

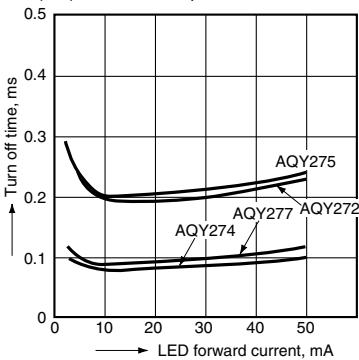


**12.-1 Turn on time vs. load voltage characteristics**

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

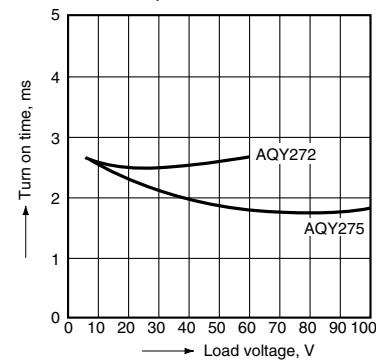

**12.-2 Turn on time vs. load voltage characteristics**


LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

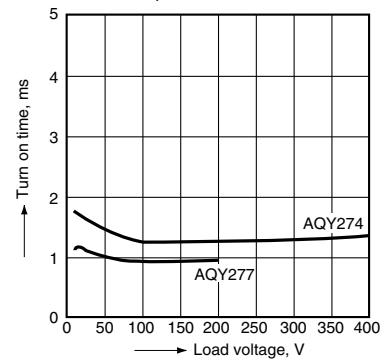

# PD 1 Form A (AQY27O)


## 13.-(1) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

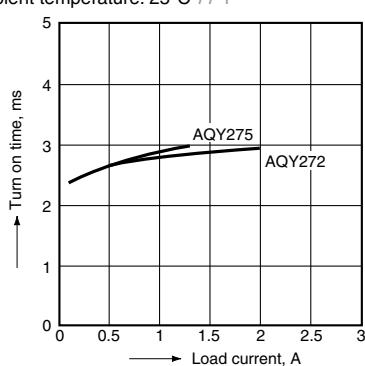


## 13.- (2) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

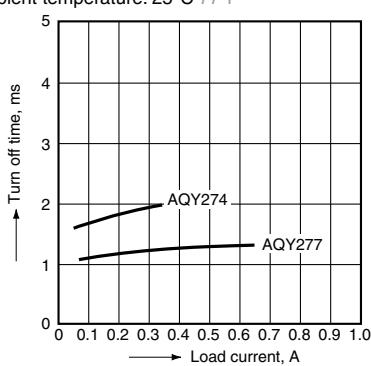


## 14.-(1) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

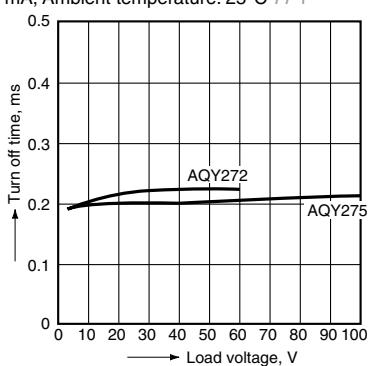


## 14.- (2) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

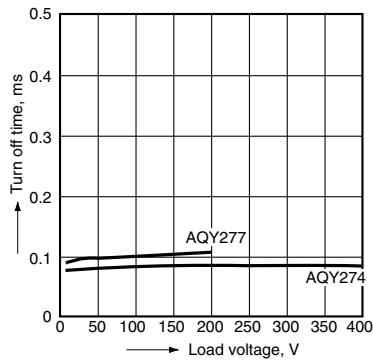


## 15.- (1) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

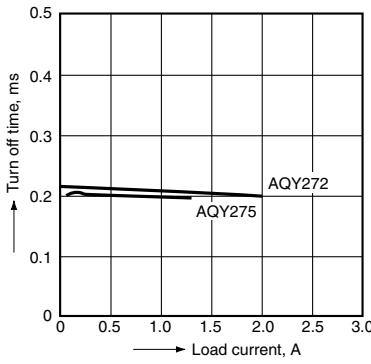


## 15.- (2) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

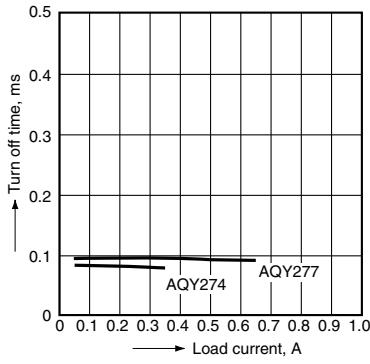

## 16. Maximum operating frequency vs. load voltage/current characteristics

Sample: All types; LED current: 10 mA; Ambient temperature: 25°C 77°F

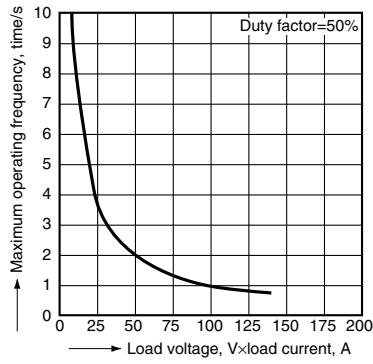

## 17. Output capacitance vs. applied voltage characteristics

Frequency: 1 MHz; Ambient temperature: 25°C 77°F

