



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Slim and high capacity
up to 3.6A
Voltage-driven type**

**PhotoMOS®
Power 1 Form A
Voltage-sensitive (AQZ10OD, 20OD)**

FEATURES

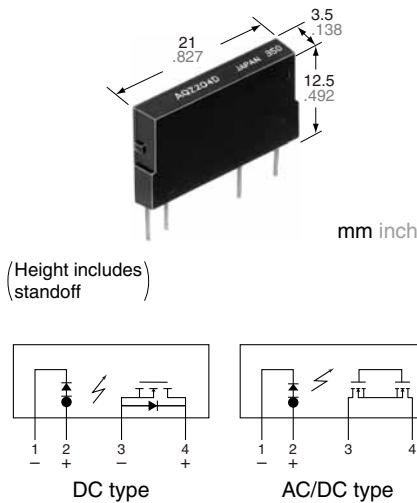

RoHS compliant

1. A voltage-sensitive power PhotoMOS

Conventional power PhotoMOS are connected externally to an input limiting resistor in order to obtain the appropriate LED current. Adding an internal constant-current element renders the input limiting resistor unnecessary, making it possible for the PhotoMOS to be voltage-driven.

2. Wide range of input voltages

Allows a wide range of input voltages from 4 to 30 V DC. The PhotoMOS can be used in 5 V, 12 V or 24 V DC systems.

3. Both AC/DC dual types and DC-only types available

The AC/DC dual type is capable of bi-directional control, and unlike conventional SSRs, does not have to be used differently depending on the load. The DC-only type is well suited for control of DC solenoids and DC motors.

4. High capacity

Supports the various types of load control, from very small loads to a max. 2.7 A for the AC/DC dual type, max. 3.6 A for the DC-only type.

5. High sensitivity and low on-resistance

Max. 3.6 A load can be controlled with the min. input voltage of 4 V DC. The on-resistance is also low at typ. 0.033 Ω (AQZ102D).

6. Slim SIL4-pin package

(W) 3.5 × (D) 21.0 × (H) 12.5 mm
(W) .138 × (D) .827 × (H) .492 inch

The compact size of the 4-pin SIL package allows high density mounting.

TYPES

1. DC type

	Output rating*		Package	Part No.	Packing quantity	
	Load voltage	Load current			Inner carton	Outer carton
DC only	60 V	3.6 A	SIL4-pin	AQZ102D	25 pcs.	500 pcs.
	100 V	2.3 A		AQZ105D		
	200 V	1.1 A		AQZ107D		
	400 V	0.6 A		AQZ104D		

* Load voltage and current of DC type: DC

2. AC/DC type

	Output rating*		Package	Part No.	Packing quantity	
	Load voltage	Load current			Inner carton	Outer carton
AC/DC dual use	60 V	2.7 A	SIL4-pin	AQZ202D	25 pcs.	500 pcs.
	100 V	1.8 A		AQZ205D		
	200 V	0.9 A		AQZ207D		
	400 V	0.45 A		AQZ204D		

* Load voltage and current of AC/DC type: Peak AC/DC

Power 1 Form A Voltage-sensitive (AQZ10OD, 20OD)

RATING

1. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks
Input	Input voltage	V _{IN}	30 V				
	Input reverse voltage	V _{RIN}	5 V				
	Power dissipation	P _{in}	300 mW				
Output	Load voltage (DC)	V _L	60 V	100 V	200 V	400 V	
	Continuous load current (DC)	I _L	3.6 A	2.3 A	1.1 A	0.6 A	
	Peak load current	I _{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	1.35 W				
Total power dissipation		P _T	1.35 W				
I/O isolation voltage		V _{Iso}	2,500 V AC				
Temperature limits	Operating	T _{opr}	−40°C to +85°C −40°F to +185°F (4 V ≤ V _{IN} ≤ 6 V) −40°C to +75°C −40°F to +167°F (6 V < V _{IN} ≤ 15 V) −40°C to +60°C −40°F to +140°F (15 V < V _{IN} ≤ 30 V)		Non-condensing at low temperatures		
	Storage	T _{stg}	−40°C to +100°C −40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks
Input	Operate voltage	V _{Fon}	1.4 V				I _L = 100 mA V _L = 10 V
	Maximum		4 V				
	Turn off voltage	V _{Foff}	0.8 V				I _L = 100 mA V _L = 10 V
	Typical		1.3 V				
Output	Input current	T _{in}	6.5 mA				V _{IN} = 5 V
	On resistance	R _{on}	0.033 Ω	0.090 Ω	0.33 Ω	1.23 Ω	V _{IN} = 5 V I _L = Max. Within 1 s on time
	Maximum		0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω	
Transfer characteristics	Off state leakage current	I _{Leak}	10 μA				V _{IN} = 0 V V _L = Max.
	Turn on time*	T _{on}	3.3 ms	2.2 ms	1.5 ms	1.2 ms	V _{IN} = 5 V I _L = 100 mA V _L = 10 V
	Maximum		10.0 ms				
	Turn off time*	T _{off}	0.2 ms		0.1 ms		V _{IN} = 5 V I _L = 100 mA V _L = 10 V
	Maximum		3.0 ms				
	I/O capacitance	C _{Iso}	0.8 pF				f = 1 MHz V _B = 0 V
	Maximum		1.5 pF				
Vibration resistance	Initial I/O isolation resistance	R _{Iso}	1,000 MΩ				500 V DC
	Maximum operating speed	—	0.5 cps				V _{IN} = 5 V Duty factor = 50% I _L × V _L = 200 (VA)
	Shock resistance	—	10 to 55 Hz at double amplitude of 3 mm		2 hours for 3 axes		
Shock resistance		—	4,900 m/s ² {500 G} 1 ms		3 times for 3 axes		

2. AC/DC type


1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks
Input	Input voltage	V _{IN}	30 V				
	Input reverse voltage	V _{RIN}	5 V				
	Power dissipation	P _{in}	300 mW				
Output	Load voltage (peak AC)	V _L	60 V	100 V	200 V	400 V	
	Continuous load current	I _L	2.7 A	1.8 A	0.9 A	0.45 A	Peak AC, DC
	Peak load current	I _{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	1.6 W				
Total power dissipation		P _T	1.6 W				
I/O isolation voltage		V _{Iso}	2,500 V AC				
Temperature limits	Operating	T _{opr}	−40°C to +85°C −40°F to +185°F (4 V ≤ V _{IN} ≤ 6 V) −40°C to +75°C −40°F to +167°F (6 V < V _{IN} ≤ 15 V) −40°C to +60°C −40°F to +140°F (15 V < V _{IN} ≤ 30 V)		Non-condensing at low temperatures		
	Storage	T _{stg}	−40°C to +100°C −40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks	
Input	Operate voltage	Typical Maximum	V _{Fon}	1.4 V	4 V		I _L = 100 mA V _L = 10 V	
	Turn off voltage	Minimum Typical		0.8 V	1.3 V		I _L = 100 mA V _L = 10 V	
	Input current	Typical	I _{IN}	6.5 mA			V _{IN} = 5 V	
	On resistance	Typical Maximum		0.066 Ω 0.18 Ω	0.180 Ω 0.34 Ω	0.64 Ω 1.1 Ω	2.4 Ω 3.2 Ω	V _{IN} = 5 V I _L = Max. Within 1 s on time
Output	Off state leakage current	Maximum	I _{Leak}	10 μA				V _{IN} = 0 V V _L = Max.
	Turn on time*	Typical Maximum	T _{on}	5.8 ms 10.0 ms	4.2 ms	2.7 ms	2.3 ms	V _{IN} = 5 V I _L = 100 mA V _L = 10 V
Transfer characteristics	Turn off time*	Typical Maximum	T _{off}	0.2 ms 3.0 ms	0.1 ms			V _{IN} = 5 V I _L = 100 mA V _L = 10 V
	I/O capacitance	Typical Maximum	C _{iso}	0.8 pF 1.5 pF				f = 1 MHz V _B = 0 V
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ				500 V DC
	Maximum operating speed	Maximum		—	0.5 cps			V _{IN} = 5 V Duty factor = 50% I _L × V _L = 200 (VA)
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes	
Shock resistance		Minimum	—	4,900 m/s ² {500 G}1 ms			3 times for 3 axes	

*Turn on/off time

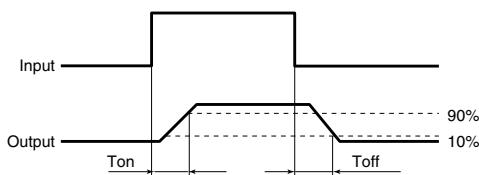

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input voltage	V _{IN}	5	V

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F;

V_{IN}: Input voltage; I_L (derate): Load current (derate); I_L: Absolute maximum ratings of continuous load current

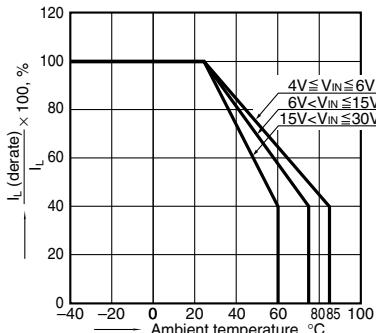


2.-1) Load current vs. ambient temperature characteristics in adjacent mounting

Input voltage: 4V ≤ V_{IN} ≤ 6V;
I_L (derate): Load current (derate); I_L: Absolute maximum ratings of continuous load current; l : Adjacent mounting pitch

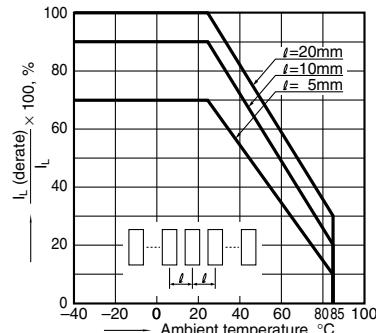


2.-2) Load current vs. ambient temperature characteristics in adjacent mounting

Input voltage: 6V < V_{IN} ≤ 15V;
I_L (derate): Load current (derate); I_L: Absolute maximum ratings of continuous load current; l : Adjacent mounting pitch

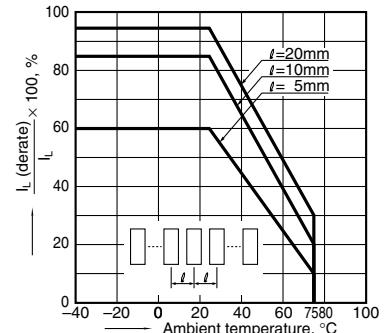


Power 1 Form A Voltage-sensitive (AQZ10OD, 20OD)


2.-**(3)** Load current vs. ambient temperature characteristics in adjacent mounting
 Input voltage: $15V < V_{IN} \leq 30V$
 I_L (derate): Load current (derate); I_L : Absolute maximum ratings of continuous load current; ℓ : Adjacent mounting pitch

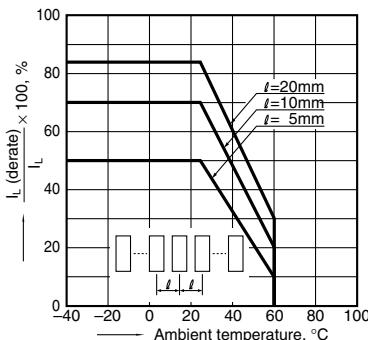


3.-**(3)** On resistance vs. ambient temperature characteristics (AC/DC type)
 Input voltage: 5 V;
 Continuous load current: 2.7 A (DC) (AQZ202D)
 1.8 A (DC) (AQZ205D)

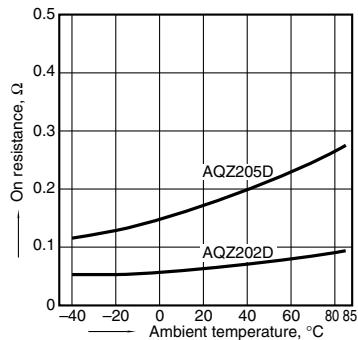


4.-**(2)** Turn on time vs. ambient temperature characteristics (AC/DC type)
 Input voltage: 5 V;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

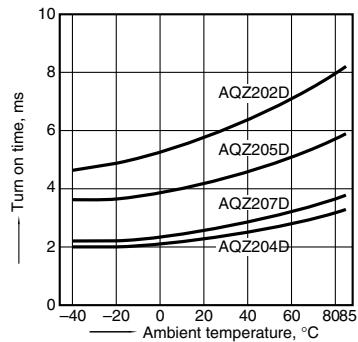

6. Operate voltage vs. ambient temperature characteristics
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

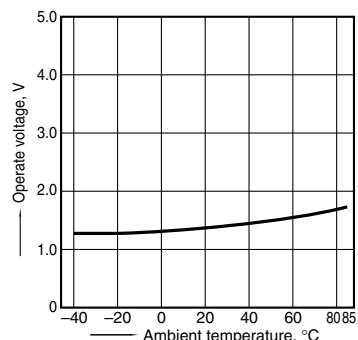


7. Turn off voltage vs. ambient temperature characteristics
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

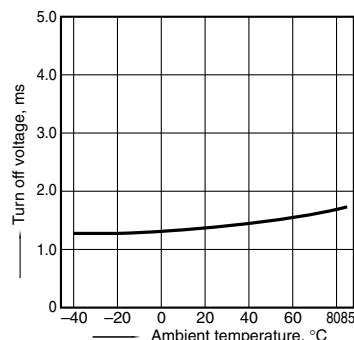


8. Input current vs. ambient temperature characteristics
 Input voltage: 5 V


3.-**(2)** On resistance vs. ambient temperature characteristics (DC type)
 Input voltage: 5 V;
 Continuous load current: 3.6 A (DC) (AQZ102D)
 2.3 A (DC) (AQZ105D)

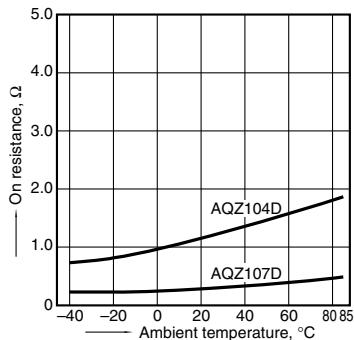

4.-**(1)** Turn on time vs. ambient temperature characteristics (DC type)
 Input voltage: 5 V; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

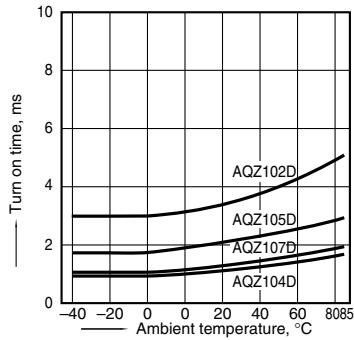


5.-**(2)** Turn off time vs. ambient temperature characteristics (AC/DC type)
 Input voltage: 5 V; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

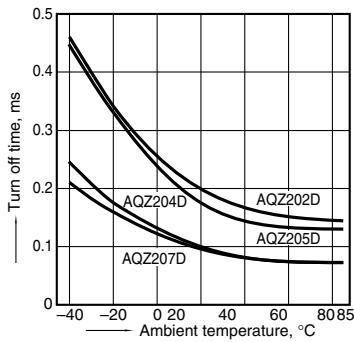


Panasonic Corporation Automation Controls Business Division
 industrial.panasonic.com/ac/e/

Power 1 Form A Voltage-sensitive (AQZ100D, 200D)


9.-(1) Current vs. voltage characteristics of output at MOS portion (DC type)
Ambient temperature: 25°C 77°F




9.-(2) Current vs. voltage characteristics of output at MOS portion (AC/DC type)
Ambient temperature: 25°C 77°F




10. Input current vs. input voltage characteristics
Ambient temperature: 25°C 77°F

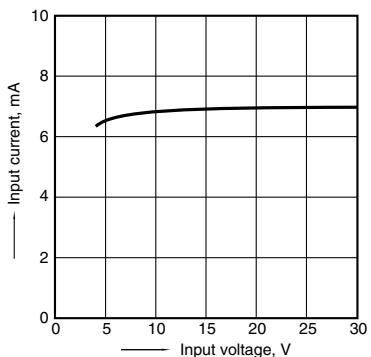


11.-(1) Off state leakage current vs. load voltage characteristics
Ambient temperature: 25°C 77°F

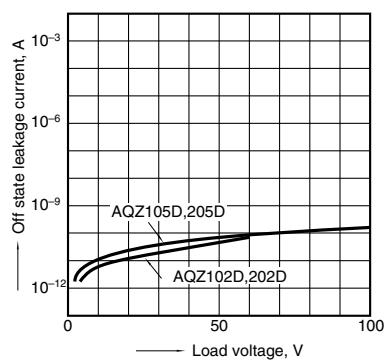


11.-(2) Off state leakage current vs. load voltage characteristics
Ambient temperature: 25°C 77°F

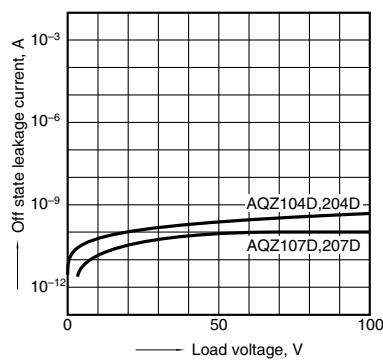


12. Maximum operating speed vs. load voltage × load current characteristics
Input voltage: 5V; Ambient temperature: 25°C 77°F

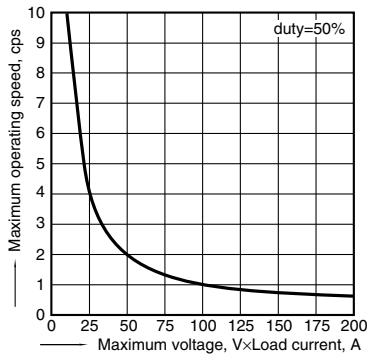

13.-(1) Output capacitance vs. applied voltage characteristics (DC type)
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

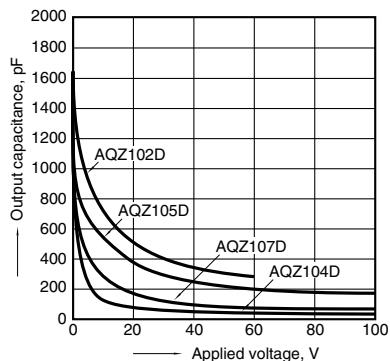


13.-(2) Output capacitance vs. applied voltage characteristics (AC/DC type)
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

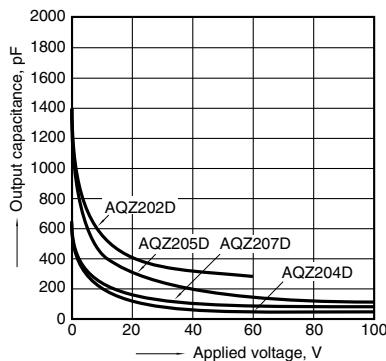


ACCESSORY (mm inch)

Socket

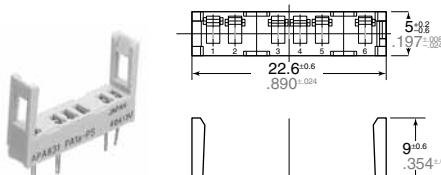


PA1a-PS

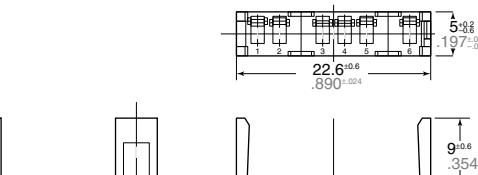


PA1a-PS-H

PC board pattern
(BOTTOM VIEW)
Standard type



Self clinching type



Tolerance: ±0.1 ±.004