



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module



ARJ12A

RoHS
Compliant

FEATURES:

- Tab down
- Available with or without LED
- Suitable CAT 5 & 6 cable and UTP
- Comply IEEE 802.3ab
- LAN Magnetic with RJ4
- Suitable for RoHS compliant reflow

APPLICATIONS:

- 10, 100 and 1000 Base-T LAN
- NIC, LoM and PC

STANDARD SPECIFICATIONS at 25°C

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

Part Number	Turns Ratio $\pm 5\%$		Tab	EMI Fingers	LEDs	Insertion Loss (dB typ)	Return Loss (dB typ @100 Ω $\pm 15\%$)		
	TX	RX					0.3- 100 MHz	1- 10 MHz	30 MHz
ARJ12A-MASD-A-B-EMU2	1CT:1CT	1CT:1CT	DOWN	Yes	G/Y	-1.2	-18	-16	-12
ARJ12A-MASD-A-B-FMU2	1CT:1CT	1CT:1CT	DOWN	Yes	G/Y	-1.2	-18	-16	-12
ARJ12A-MCSD-MU2	1CT:1CT	1CT:1CT	DOWN	Yes	-	-1.2	-18	-16	-12


Part Number	Crosstalk (dB TYP)			Common Mode Rejection (dB TYP)		Hipot (Vrms)
	1 - 10 MHz	30 - 60 MHz	60 - 100 MHz	1 - 50 MHz	50 - 130 MHz	
ARJ12A-MASD-A-B-EMU2	-40	-35	-30	-30	-20	1500
ARJ12A-MASD-A-B-FMU2	-40	-35	-30	-30	-20	1500
ARJ12A-MCSD-MU2	-40	-35	-30	-30	-20	1500

Contact Abracon for more custom configurations. See options to build a custom configuration.


OPTIONS AND PART IDENTIFICATION

ARJ12A - - - -

Mechanical	Schematic	Left LED color (e.g. B for Yellow, AB for Green-Yellow)	Right LED color (e.g. B for Yellow, AB for Green-Yellow)	LED polarity	Turns Ratio (Tx)	Turns Ratio (Rx)	Gold plating
MA ~ MD (Please see mechanical section)	SA ~ SZ (Please see schematic section)	Blank: No LED A: Green B: Yellow C: Amber D: Orange	Blank: No LED A: Green B: Yellow C: Amber D: Orange	Blank: No LED E ~ H (Please see 7.0 LED polarity section)	K: 1CT:1.41 L: 1CT:1 M: 1CT:1CT N: 1.414:1CT O: 1CT:1.41CT P: 1:2CT Q: 1:1.414CT R: 1CT:2.5	S: 1CT:1.41 T: 1CT:1 U: 1CT:1CT V: 1.414:1CT W: 1CT:1.41CT X: 1:2CT Y: 1:1.414CT Z: 1CT:2.5	1: 3u “ 2: 6u “ 3: 15u “ 4: 30u “ 5: 50u “



RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module




ARJ12A


RoHS
Compliant

MECHANICAL DIMENSIONS


MA (10/100 Base-T)

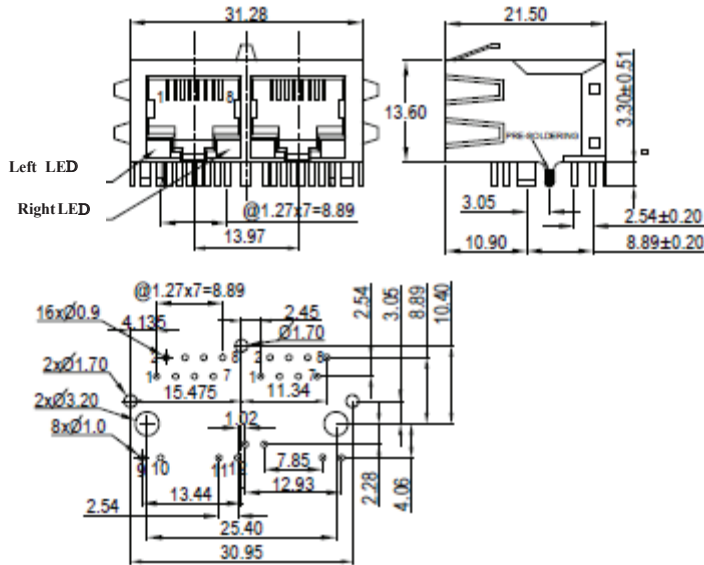


MB (1000 Base-T)

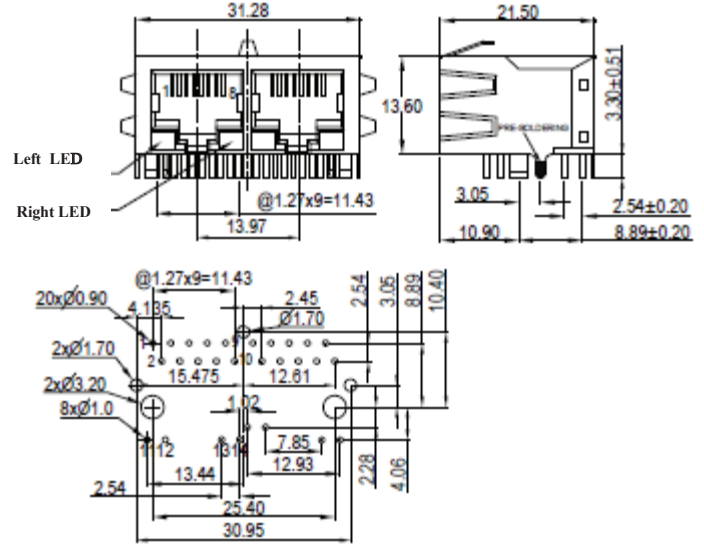


MC (10/100 Base-T)

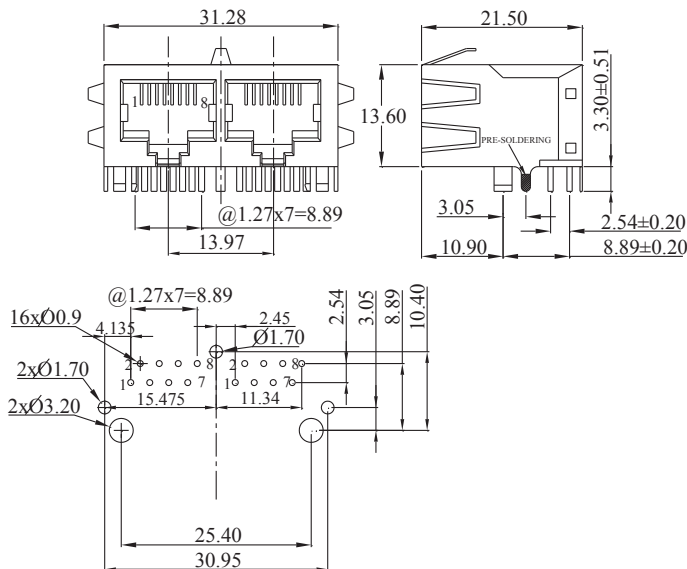


MD (1000 Base-T)

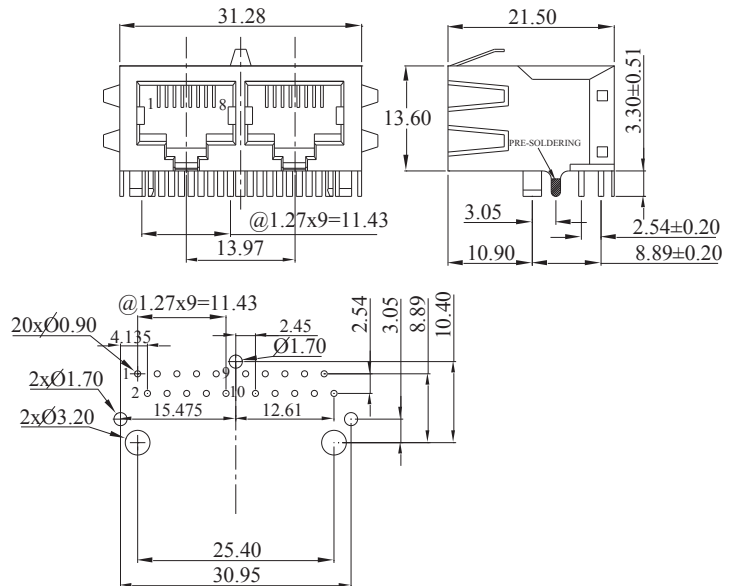

Dimension: mm. All tolerances are ± 0.25 unless otherwise specified





RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module




ARJ12A

RoHS
Compliant

SCHEMATICS

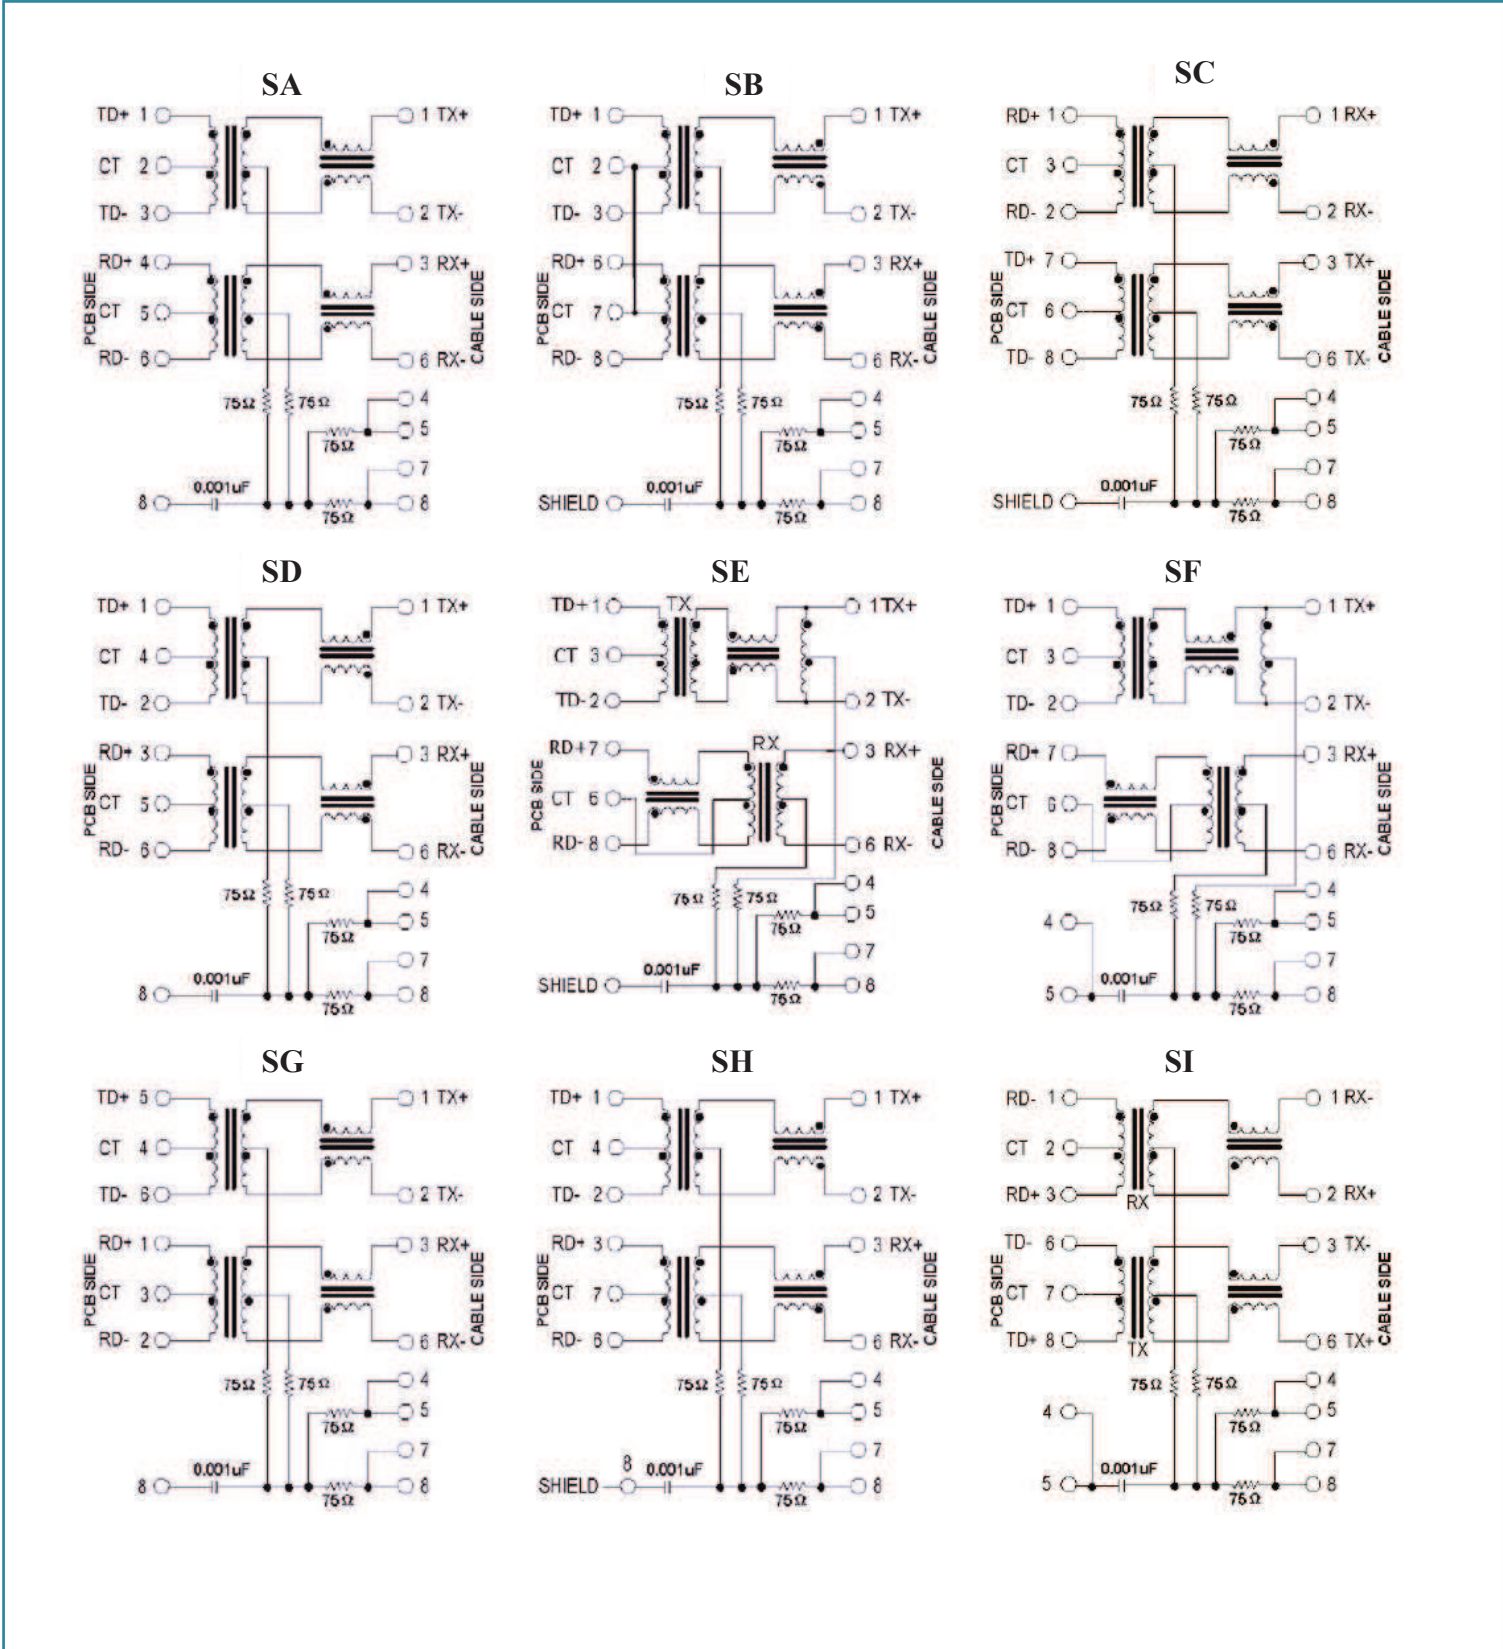


RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module




ARJ12A

RoHS
Compliant

SCHEMATICS - continued

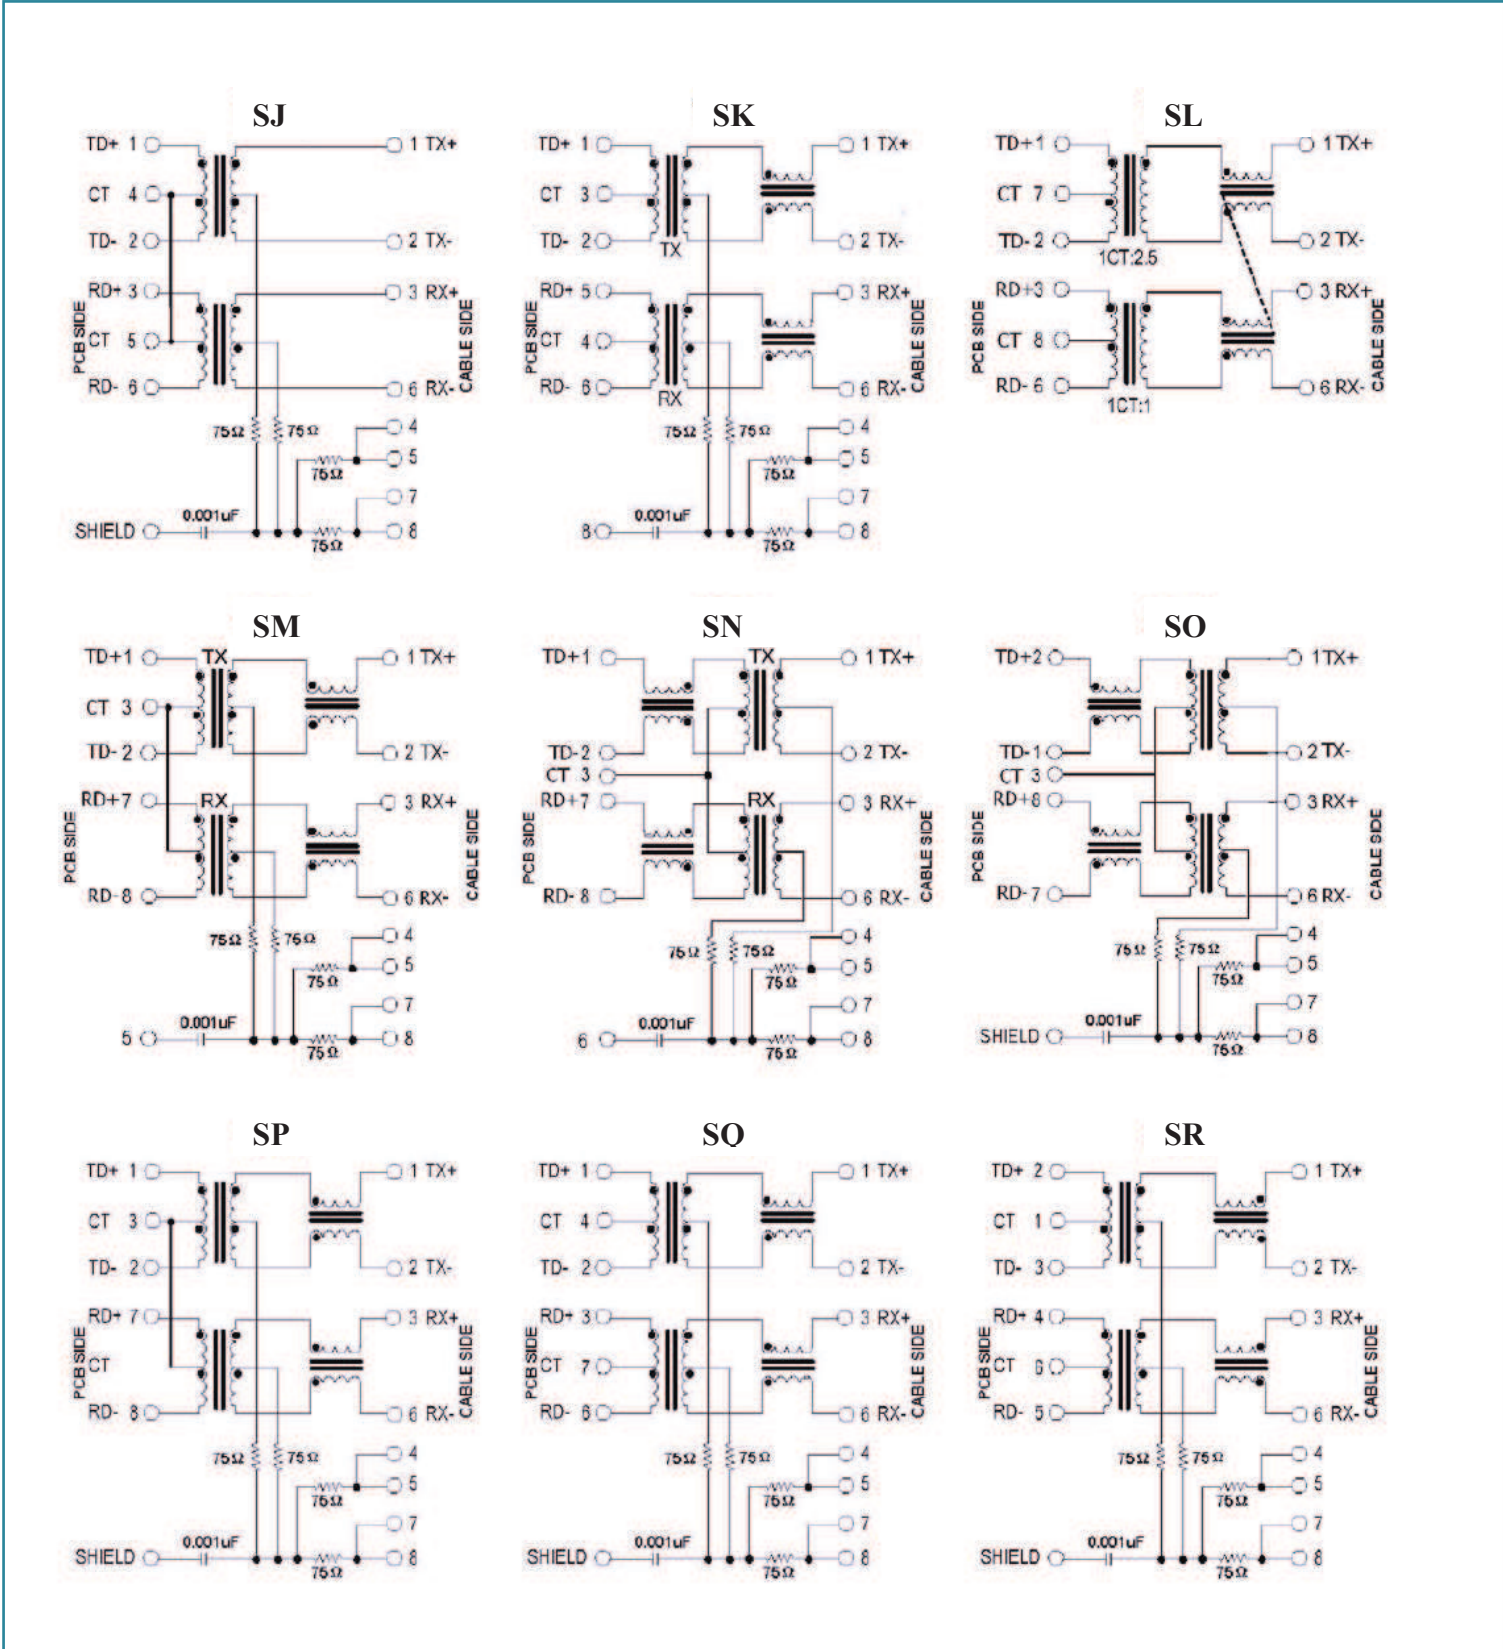

ABRACON IS
ISO 9001:2008
CERTIFIED




ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 06.09.14

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module






31.28 x 13.60 x 21.50 mm

ARJ12A

RoHS
Compliant

SCHEMATICS

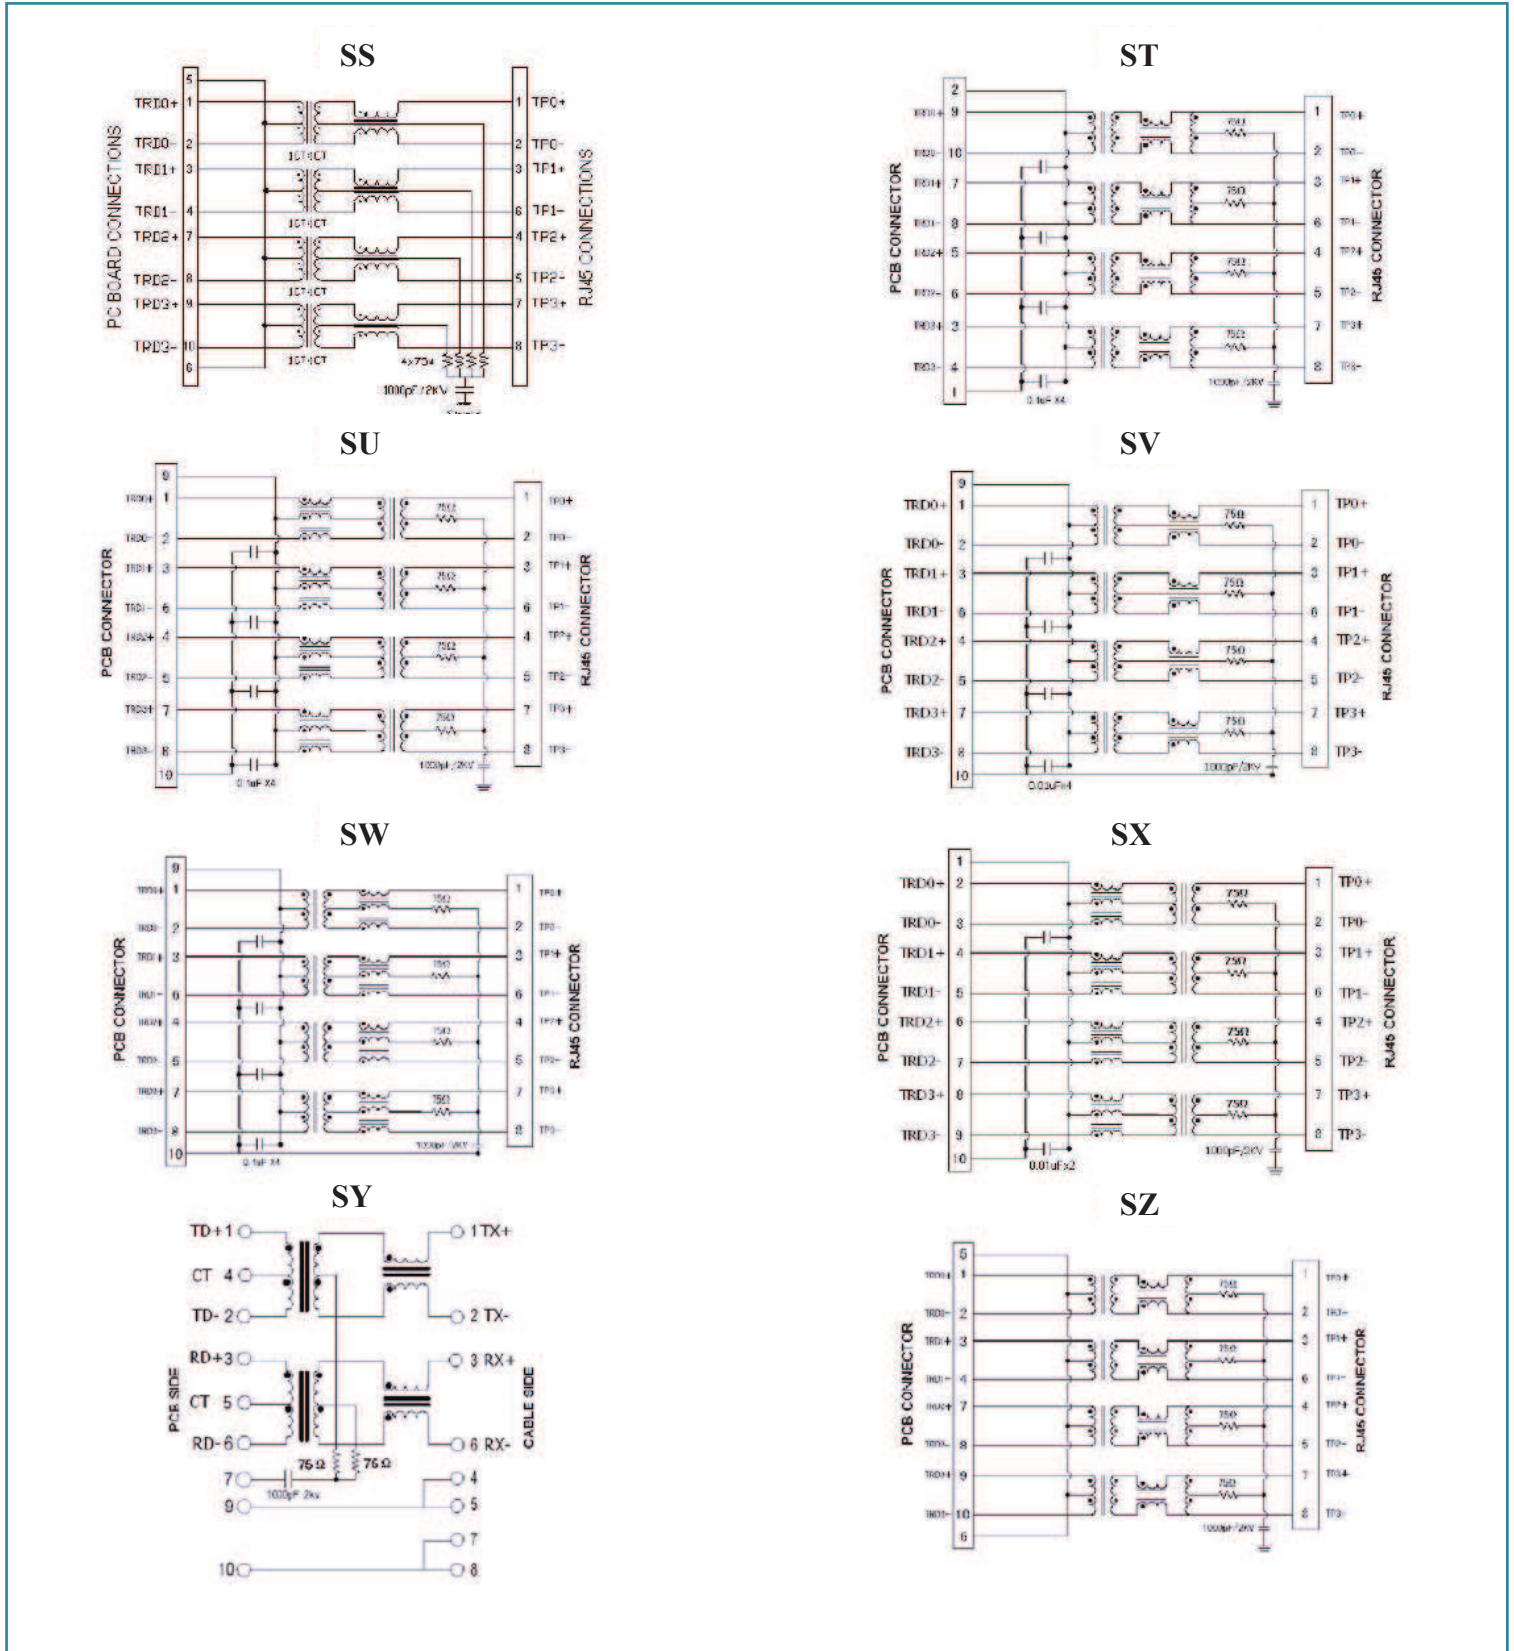





ARJ12A



RoHS
Compliant

LED POLARITY


8PIN:

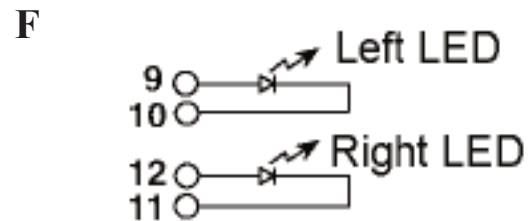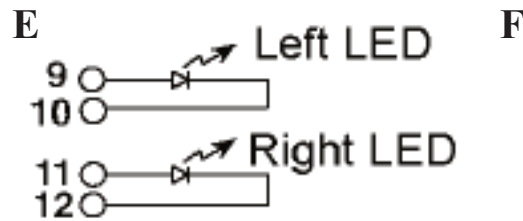

10PIN:

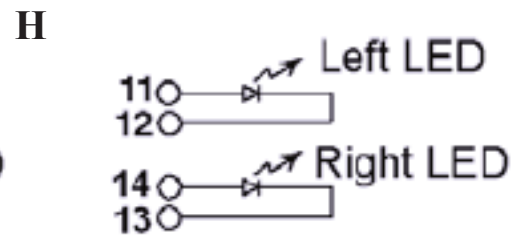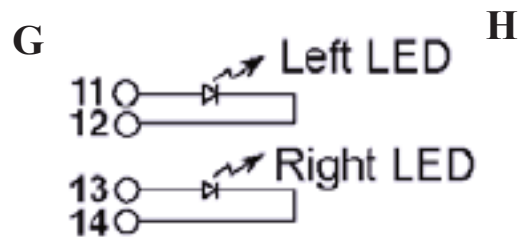

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module





ARJ12A

RoHS
Compliant


PACKING: 30pcs/tray

Packaging material: PET

Outer carton unit : 600 pcs/ 20 Trays/box

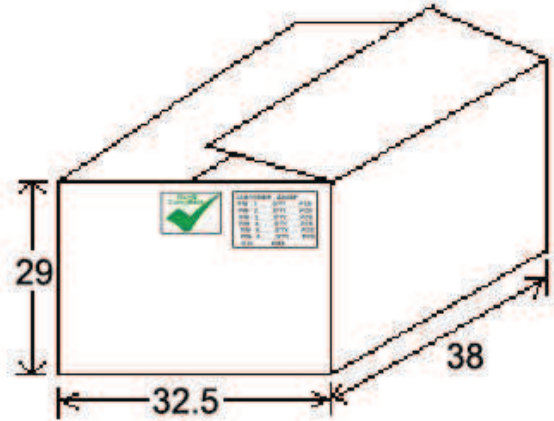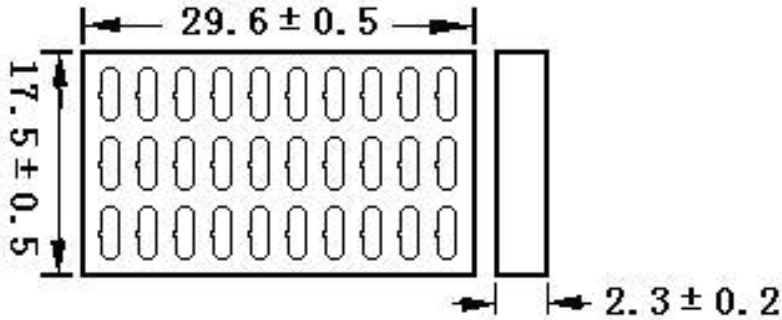

REFLOW PROFILE:

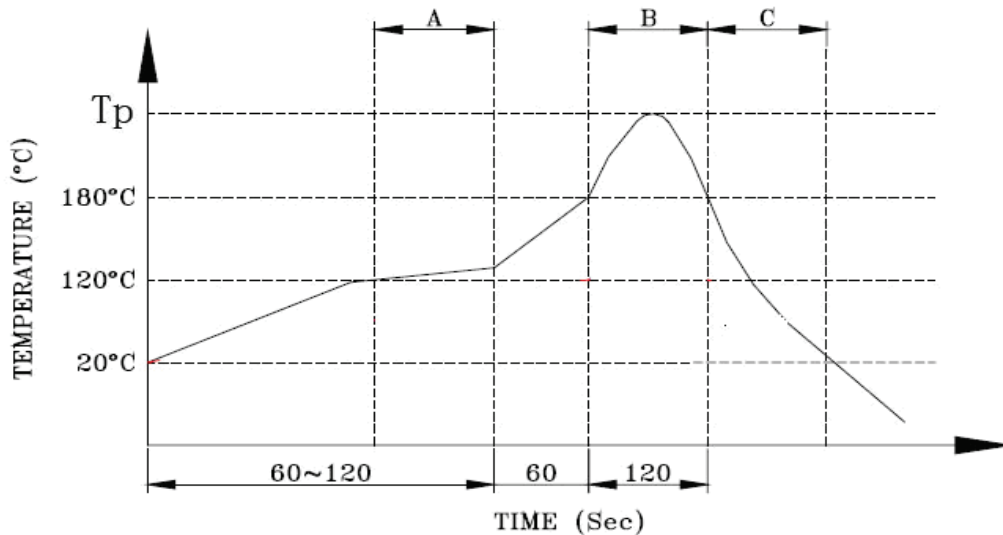

A. Preheating B. Soldering C. Gradual Cooling

Peak temperature(Tp) : 250± 10°C

Peak temperature(Tp) time : 5sec max

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 06.09.14