



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ARK-1123L

## Intel® Atom E3825 SoC with Dual COM and GPIO Palm-Size Fanless Box PC

**NEW**



### Features


- Intel® Atom™ Processor E3825 Dual Core 1.33 GHz SoC
- 1 x 2.5" SATA HDD/SSD Bay
- 1 x GbE & 1 x VGA & 1 x GPIO
- 1 x RS-232 & 1 x RS-232/422/485
- 1 x Full-Size MiniPCIe (ex. WLAN or WWAN module)
- 1 x Half Size MiniPCIe (ex. mSATA)
- Optional VESA / DIN Rail / Wall Mounting kits
- Threaded DC jack design
- Supports SUSIAccess and Embedded Software APIs

### Specifications


		ARK-1123L-S3A1E
Processor System	CPU	Intel Atom E3825 Dual Core SoC
	Frequency	1.33 GHz
	L2 Cache	1 MB
	BIOS	AMI EFI 64 Mbit (Default BIOS is supported for 64-bit OS installation, BIOS for 32-bit OS is supported by project)
Memory	Technology	DDR3L 1066MHz
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel® Atom SoC integrated
	Graphic Engine	DirectX* 11.1, OGL 3.0, OCL 1.1, OGL ES 2.0 support Encode: H264, MPEG2/4, VC1, WMV9 Decode: H264, MPEG2
	VGA	1 x VGA, support up to 1920 x 1200 at 60Hz
Audio	Main System	ALC-888S, High Definition Audio. Line-out & Line-in
Ethernet	LAN #1	10/100/1000 Mbps Intel I210 GbE, support Wake on LAN
I/O Interface	Serial Ports	1 x RS-232 & 1 x RS-232/422/485 (BIOS selectable)
	USB Interface	1 x USB 2.0 & 1 x USB3.0
Other	Watchdog timer	255-level timer interval, setup by software
	GPIO	8 bit GPIO
Expansion	Mini PCIe	1 x Full-size Mini PCIe, support WLAN or WWAN module
Storage	2.5" Drive Bay	1 x 2.5" SATA HDD Bay (Max Height 9.5mm)
	mSATA	1 x Half-size mSATA
Software Support	Microsoft Windows	WES7, Windows 7, WE8S, Windows 8 and Windows 10 (32-bit support by project)
	Linux	Support (by Project)
Power Requirement	Power Input Voltage	Single 12 V <sub>DC</sub>
	Power Adapter	AC to DC, DC12 V/3 A, 36 W with threaded design
Power Consumption	Typical	5.28W
	Max.	8.16W
Mechanical	Construction	Aluminum housing
	Mounting	VESA/DIN Rail/Wall Mounting Kits (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
	Weight	0.8kg
Environment	Operating Temperature	With extended temperature SSD/mSATA/RAM : -30 ~ 70° C with 0.7m/s air flow With standard temperature HDD/SSD/mSATA/RAM peripherals:0 ~ 40° C with 0.7m/s air flow
	Storage Temperature	-40 ~ 85° C (-40~185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With mSATA/SSD: 3 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis With HDD: 0.5Grms, IEC 60068-2-64, random, 5~500Hz, 3 axes, 1hr/axis
	Shock During Operation	With mSATA/SSD: 30 G, IEC 60068-2-27, half sine, 11 ms duration With HDD: 10G, IEC 60068-2-27, half sine, 11 ms duration
Regulation	EMC	CE/FCC Class A, CCC, BSMI
	Safety	UL, CCC, BSMI, CB




## Dimensions

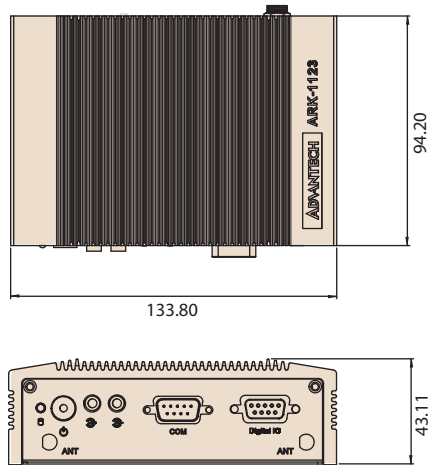


### DIN Rail



### VESA mount




### Wall mount




Unit: mm

## Front Panel External I/O Mechanical Layout/Drawing

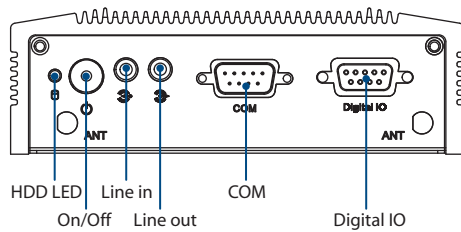

## Rear Panel External I/O Mechanical Layout/Drawing

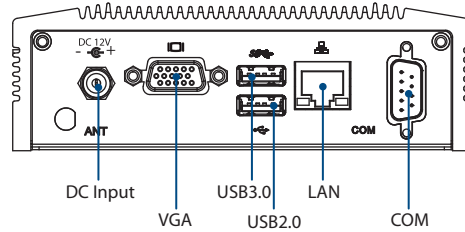

## Ordering Information

Part Number	Intel CPU	RAM	VGA	GbE	USB 2.0	USB 3.0	RS-232	RS-232/422/485	GPIO	Audio	MiniPCIe	2.5" HDD bay	mSATA	Operating Temperature
ARK-1123L-S3A1E	Intel Atom E3825	Up to 8GB	1	1	1	1	1	1	1	Line in Line out	1 Full size	1	1 (H/S)	-30 ~ 70° C

Note: Memory, storage and operating system bundled by request.

## Packing List

Part Number	Description
-	1 x ARK-1123L Unit
-	1 x User Manual (Simplified Chinese)
96PSA-A36W12W7	1 x AC to DC adapter DC 12V/3A 36W, -20 ~ 60° C

## Embedded OS (Only available for T-Parts OEM, and CTOS service)

Part Number	Description
2070013031	WE7E 64-bit with EN/JP/TC/SC (OS size around 11G)
2070013369	WE8S 64-bit with EN/JP/TC/SC (OS size around 13G)
2070014790	WIN10 IoT LTSB x64 Eng

## Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mounting kit
AMK-R001E	ARK-112X series DIN-rail mounting kit
AMK-W001E	ARK-112X series Wall mounting kit