



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ARK-2120F

Intel® Atom™ Dual Core D2550 with 3 GbE, 6 COM & Wide Range Power Fanless Box PC




Features

- Intel® Atom™ Dual Core D2550 1.86 GHz, DDR3 memory supports up to 4 GB
- VGA, HDMI, 48-bit LVDS, support dual independent display and DirectX 9
- Mini PCIe expansion with SIM holder for communication module, i.e. HSDPA, WLAN
- Supports up to 3 x GbE, 5 x USB 2.0 and 6 x COMs ports
- Supports external CFast socket and 1 x 2.5" SATA HDD Bay
- Supports 12 ~ 24V wide range DC input
- Lockable DC jack design
- Supports iManager, SUSIAccess and Embedded Software APIs

Specifications


		ARK-2120F-S8A1E
Processor System	CPU	Intel Atom D2550
	Frequency	1.86 GHz (Dual Core)
	L2 Cache	1MB
	System Chipset	D2550 + Intel NM10
	BIOS	AMI EFI 16Mbit
Memory	Technology	DDR3 1066 MHz (D2550)
	Max. Capacity	4 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Atom D2550
	Graphic Engine	DirectX 9 and OpenGL3.0 support Hardware decode H/W acceleration: MPEG2 H/W Decode/Acceleration: H.264/VC1/WMV9
	VGA	Up to 1920 x 1200
	HDMI	Supports 1920 x 1200, Max data rate: up to 1.65 Gb/s, Supports HDMI v1.3 Up to 1080p support
	LVDS	Supports 48-bit LVDS, up to 2560 x 1600 (D2550)
	Dual Display	Yes, (VGA + HDMI, VGA + LVDS, HDMI + LVDS)
Ethernet	LAN1	10/100/1000 Mbps Intel 82583V GbE, support Wake On Lan
	LAN2	10/100/1000 Mbps Intel 82583V GbE, support Wake On Lan
	LAN3	10/100/1000 Mbps Intel 82583V GbE, support Wake On Lan
Audio	Interface	Realtek ALC892, High Definition Audio. Line-out, Mic-in, Line-in
IO Interface	Serial Ports	2 x RS-232 ports, 4 x RS-232/422/485 port with auto flow control (by BIOS setting)
	USB Interface	5 x USB ports, USB 2.0 Compliant
Other	Digital IO	8-bit
	Watchdog Timer	255 levels timer interval, setup by software
Expansion	Mini PCIe	1 x full size Mini PCIe with SIM holder
Storage	HDD	Supports one SATA 2.5" SATA HDD Bay (Compatible with 12.5mm height HDD) (Max. Data Transfer Rate 300 MB/s)
	SSD	Supports one external CFast socket
Software Support	Microsoft Windows	Windows 7 32bit, Windows 7 Embedded 32bit (XP Professional & XP Embedded support by project)
Power Requirement	Power Type	AT/ATX
	Power Input Voltage	12 V _{DC} ~ 24 V _{DC}
	Minimum Power Input	12 V ~ 24 V, 3.0 A ~ 1.5 A
	Power Adapter	AC to DC, DC19 V/4.73A, 90 W (Optional)
Power Consumption	Typical	9.2 Watt (with Intel Atom D2550 at 1.8 GHz)
	Max.	11.59 Watt (with Intel Atom D2550 at 1.8 GHz)
Mechanical	Construction	Aluminum housing
	Mounting	Din-Rail mounting, Desk/wall-mounting, VESA mounting
	Dimensions (W x H x D)	264.50 x 68.39 x 133.0 mm (10.41" x 2.69" x 5.24")
	Weight	2.5 kg (5.51 lb)
Environment	Operating Temperature	With extended temperature peripherals: -20 ~ 60° C (-4 ~ 140° F) with air flow With 2.5-inch hard disk 0 ~ 45° C (32 ~ 112° F) with air flow
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD: 5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis.
	Shock During Operation	With SSD: 50 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	UL, CCC, BSMI

Dimensions

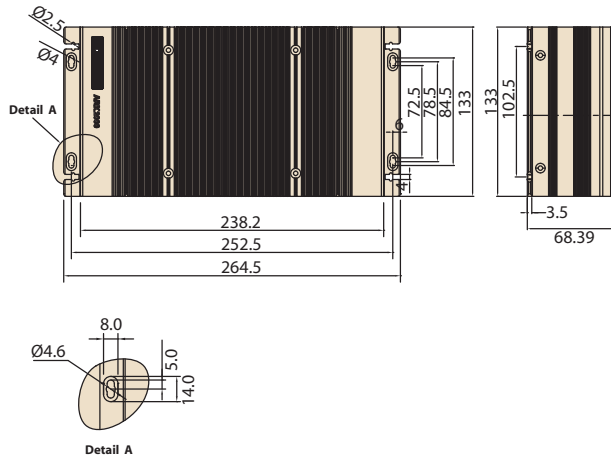


DIN Rail


Unit: mm




VESA mount




Wall mount



Front Panel External I/O Mechanical Layout/Drawing

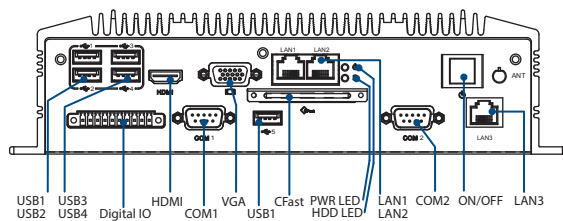

Rear Panel External I/O Mechanical Layout/Drawing

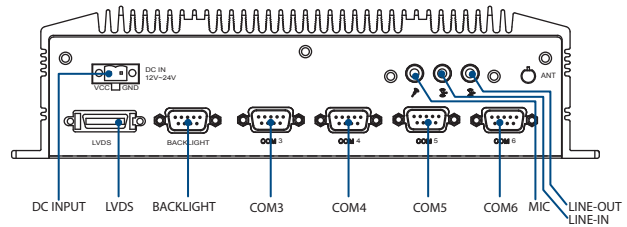

Ordering Information

Part No.	CPU	VGA	HDMI/DP	LVDS	GbE	USB 2.0	RS-232	RS-232/422/485	DIO	Audio	Full-size MiniPCIe	SIM	CFast	2.5" SATA II HDD Bay	Power Input	Operating Temp.
ARK-2120F-S8A1E	Intel Atom D2550 1.86 GHz	Yes	Yes	48-bits	3	5	2	4	8-bits	Lin-out, Line-in, MIC	1	1	1	1	DC 12V-24V 2-pin phoenix head	-20 - 60° C

Note: Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-2120 Unit
-	1 x Utility CD
-	1 x User Manual (Simplified Chinese)
-	1 x China RoHS
1700009001	1 x 2-pin Phoenix to DC-Jack power cable

Optional Items

Part Number	Description
XARK-9NA0904747	AC-to-DC Adapter, DC19 V/4.73 A 90 W, with Phoenix Power Plug
1700001524	Power cable 3-pin 180cm, USA type
1702002605	Power cable 3-pin 180cm, EU type
1702031801	Power cable 3-pin 180cm, UK type
AMK-V004E	VESA mounting bracket
AMK-R004E	DIN-rail mounting kit for ARK-2000 series

Embedded OS

Part Number	Description
2070011953	Image WES7E SP1 x32 ENG/GER/JPN/CT