



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## M12-Splitters/T-Connectors


ASBS 2 M12-S2326 | ASBS 2 M12-S2325  
ASBS 2 M12-S1387 | ASBS 2 M12-S3995



### M12 Male to 2xM12 Female

Splitter/T-connector, two way, 4-poles with one M12 male connector and two M12 female connectors.


#### ASBS 2 M12-S2326

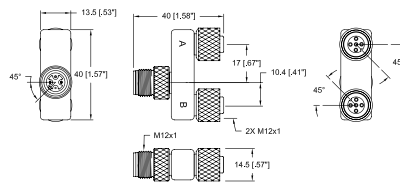


### M12 Male to 2xM12 Female

Splitter/T-connector, two way, 5-poles with one M12 male connector and two M12 female connectors.


#### ASBS 2 M12-S2325

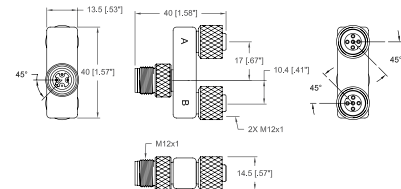

#### ASBS 2 M12-S3187




#### ASBS 2 M12-S3995

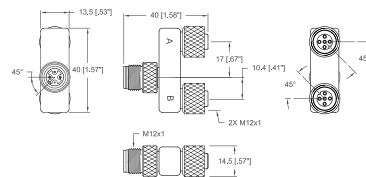


## Pin Assignments

### Face Views

#### ASBS 2 M12-S2326




#### ASBS 2 M12-S2325




### Wiring Diagrams


#### ASBS 2 M12-S2326




#### ASBS 2 M12-S2325



#### ASBS 2 M12-S3187



#### ASBS 2 M12-S3995





## M12-Splitters/T-Connectors

ASBS 2 M12-S2326 | ASBS 2 M12-S2325 | ASBS 2 M12-S3187 | ASBS 2 M12-S3995

### Technical Data

#### Environmental







Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -15°C (+5°F) / +90°C (+194°F)

#### Mechanical

Molded body PUR, black  
 Insert PUR, black  
 Contact Brass, gold over nickel plated  
 Coupling nut Brass, nickel-plated  
 O-ring FKM

#### Electrical

Contact resistance  $\leq 5 \text{ m}\Omega$   
 Current rating 4 A  
 Voltage rating 250 V

Part Number	Pins	Characteristics
ASBS 2 M12-S2326	4	 
ASBS 2 M12-S2325	5	 
ASBS 2 M12-S3187	5	 
ASBS 2 M12-S3995	5	