



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EEPROM TINYSHIELD

ASD2202-R-E

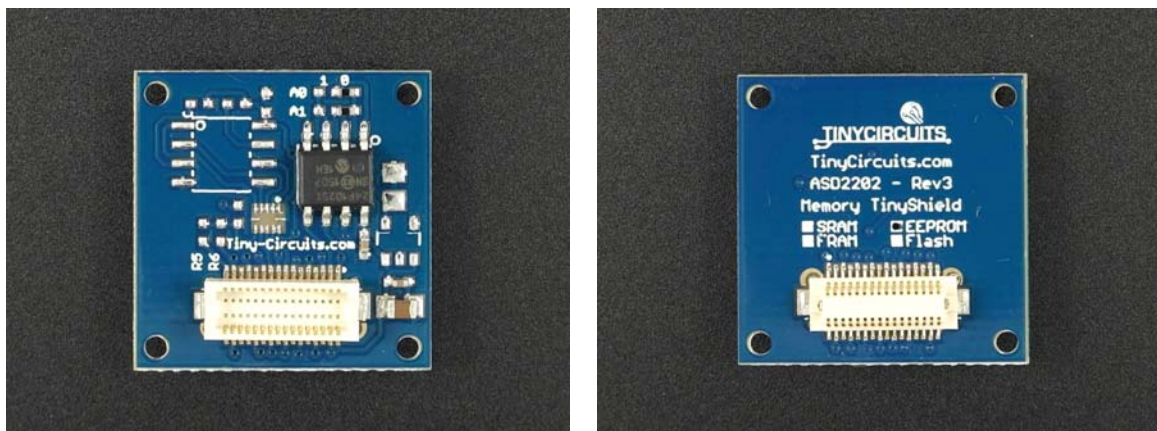

DESCRIPTION

Add robust storage memory to your TinyDuino with this EEPROM TinyShield. Built around the Microchip 24FC1025, this EEPROM is a simple way to store settings, logs, or any other data your project needs to keep through power cycles.

The EEPROM TinyShield is low power and works through the I2C interface. It has 1 Mbit (128KBytes) of storage and is byte addressable. Example code is provided to make it simple to add EEPROM support to your projects.

*To learn more about the **TinyDuino Platform**, click [here](#)*

<https://tinycircuits.com/pages/tinyduino-overview>

TECHNICAL DETAILS

*To see what other TinyShields this will work with or conflict with, check out the **TinyShield Compatibility Matrix***

Microchip 24FC1025 EEPROM Specs

- 128K x 8 (1 Mbit)
- 128-Byte Page Write Buffer
- Page Write Time 5 ms Max
- Write Endurance: 1,000,000
- Data Retention: 200 Years

TinyDuino Power Requirements

- Voltage: 1.8V - 5.5V
- Current:
 - Standby: 5uA
 - Read: 450uA
 - Write: 5mA
 - Due to the low current, this board can be run using the TinyDuino coin cell option

Pins Used

- A5/SCL - I2C Serial Clock line
- A4/SDA - I2C Serial Data line

Dimensions

- 20mm x 20mm (.787 inches x .787 inches)
- Max Height (from lower bottom TinyShield Connector to upper top TinyShield Connector): 5.11mm (0.201 inches)
- Weight: 1.11 grams (.039 ounces)