



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AUDIO TINYSHIELD

ASD2841-R

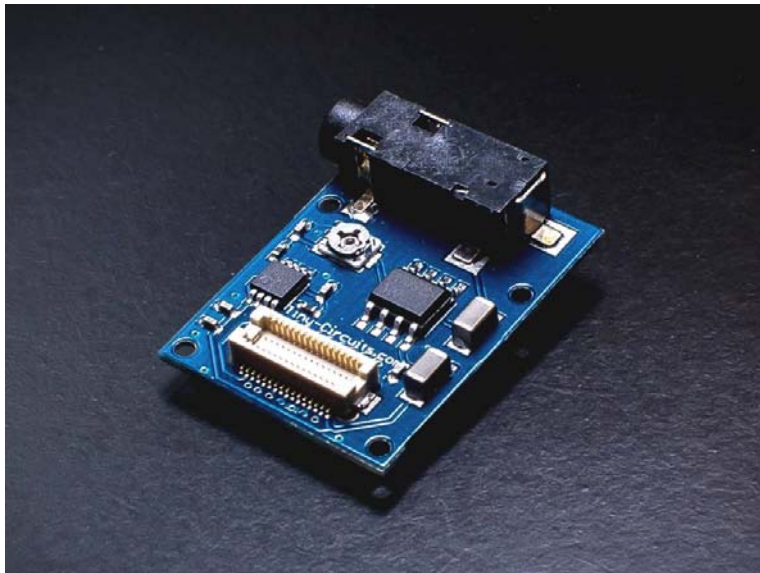

DESCRIPTION

This TinyShield makes it incredibly easy to add audio support to your TinyDuino projects. It has an onboard DAC, filter and amplifier for great sound quality. It can play any size uncompressed 22kHz, 16bit mono Wave files (.wav) directly off a microSD card (a **microSD TinyShield** is also required for this).

The audio output is mono on both the L and R channels, and uses a standard 3.5mm headphone jack connector. An onboard potentiometer can be used to control the volume. This TinyShield is completely compatible with the **Arduino waveHC Library** from Adafruit for playing wave files from a microSD card.

To learn more about the **TinyDuino Platform**, click **here**

<https://tinycircuits.com/pages/tinyduino-overview>

TECHNICAL DETAILS

To see what other TinyShields this will work with or conflict with, check out the **TinyShield Compatibility Matrix**

Audio Specs

- Microchip MCP4921 12-bit Digital-to-Analog Converter (DAC)
- Audio Output: mono on both the L and R channels on standard 3.5mm headphone jack
- Volume Control: Manual onboard potentiometer
- Wave file streaming: Can play any size uncompressed 22kHz, 16bit mono Wave files from a microSD card

TinyDuino Power Requirements

- Voltage: 3.0V - 5.5V
- Current: 5 - 20mA. Due to the current, this board should not be run using the TinyDuino coin cell option

Pins Used

- **2 - DAC_CS:** This signal is the chip select for the audio DAC
- **3 - DAC_SCK:** This signal is the serial clock for the audio DAC
- **4 - DAC_SDI:** This signal is the serial data in for the audio DAC

Dimensions

- 24.14mm x 20mm (1.07 inches x .787 inches)
 - Max Height (from lower bottom TinyShield Connector to upper top TinyShield Connector): 7.81mm (0.307 inches)
 - Weight: 2.1 grams (.07 ounces)
-

NOTES

- The 3.5mm jack extends past the end of the board and is fairly tall. Normal size TinyShields (20mm x 20mm) can stack on top of this TinyShield; however, boards that are longer (like the WiFi TinyShield) cannot be stacked directly on top.