



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ASMB-584

LGA 1150 Intel® Xeon® E3 v3/ 4th Generation Core™ Micro ATX Server Board with 2 PCIe x16 slots (x8 link), 1 PCIe x4, 1 PCI, USB 3.0, Dual LANs

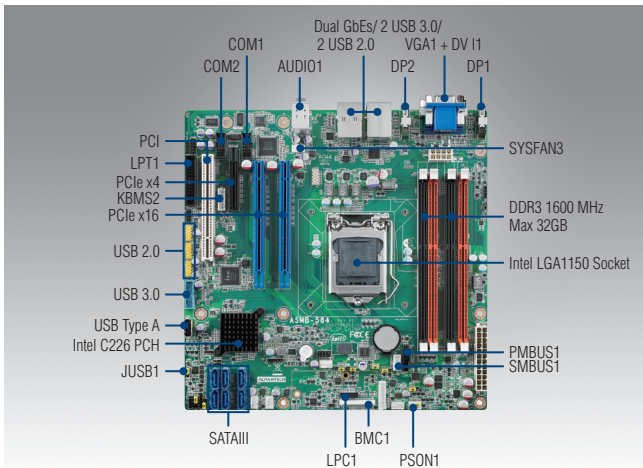

Features

- Supports LGA 1150 Intel® Xeon® E3 v3 and 4th Generation Core™ i7/i5/i3 processors
- DDR3 1600 MHz ECC UDIMM up to 32GB
- Two PCIe x16 slots (x8 link), one PCIe x4 and one PCI slots
- Rackmount optimized placement with positive air flow design
- Supports Intel vPro, AMT 9.0, IPMI (optional), Software RAID 0, 1, 5, 10 and Embedded software APIs/utilities




Specifications

Form Factor		Micro ATX form factor
Processor System	Socket	Intel LGA 1150
	CPU type	Intel® Xeon® E3-1200 v3 and Core™ i3/i5/i7 series (TDP up to 88W)
Core Logic	Chipset	Intel C226 chipset
Memory	Total slots	4 (Dual Channel)
	Max. capacity	32 GB
	Memory type	DDR3 ECC/Non-ECC 1600/1333/1066 MHz UDIMM (240-pin)*
	Memory size	1 GB, 2 GB, 4 GB, 8 GB
Expansion Slots	Total PCI/PCI-X/PCIe slots	4
	Slot location 1	-
	Slot location 2	-
	Slot location 3	-
	Slot location 4	PCI
	Slot location 5	PCIe x4 (Gen2 x4 link)
	Slot location 6	PCI x16 slot (Gen3 x8 link)
Graphics	Controller	Intel HD Graphics
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed
Storage	SATA controller	Intel C226: 6 SATA3 6 Gb/s ports with Intel Rapid Storage Technology support (for Windows only) (Supports software RAID 0, 1, 10 & 5)
	SAS controller	-
Networking	Interface	10/100/1000 Mbps
	Controller	GbE LAN1: Intel I217-LM; GbE LAN2: Intel I210-AT
	Connector	RJ-45 x 2
Onboard I/O Connectors	Printer Port connector	1
	PSU connector	24-pin SSI power connector + 8-pin SSI 12V power connector
	USB connector	2 USB 3.0; 7 USB 2.0 (1 x USB Type-A)
	Fan header	5 (4-pin)
	SMBus	2
	Chassis intruder	1
	Front LAN LED	1
	Serial port header	2 (RS-232)
	Audio Connector	1 (ALC 892)
	PS/2 KB/Mouse	1
Rear I/O Connectors	External serial port	-
	External USB port	4 (2 USB 3.0 and 2 USB 2.0)
	VGA port	1
	DVI	1
	Display Port	2
	RJ-45	2 for G2 version
	PS/2 KB/mouse	-
Watchdog Timer	Output	System reset
	Interval	Programmable 1 – 255 sec
Power Requirement	Power On	Intel LGA1150 2.6GHz; DDR3 4G x4
		3.3 V 5 V 12 V 12V_8P 5 Vsb -12 V
Environment	Operating	3.7 A 2.22 A 0.07 A 3.77 A 0.12 A 0.02 A
		Non-operating
		Temperature
Physical Characteristics	Humidity	-40 – 85 °C (-40 – 185 °F)
		5% – 95% (Non-condensing)
Physical Characteristics	Dimension (L x H)	244 x 244 mm (9.6" x 9.6")

*Memory ECC function enabled or not depends on processor support.

Block Diagram

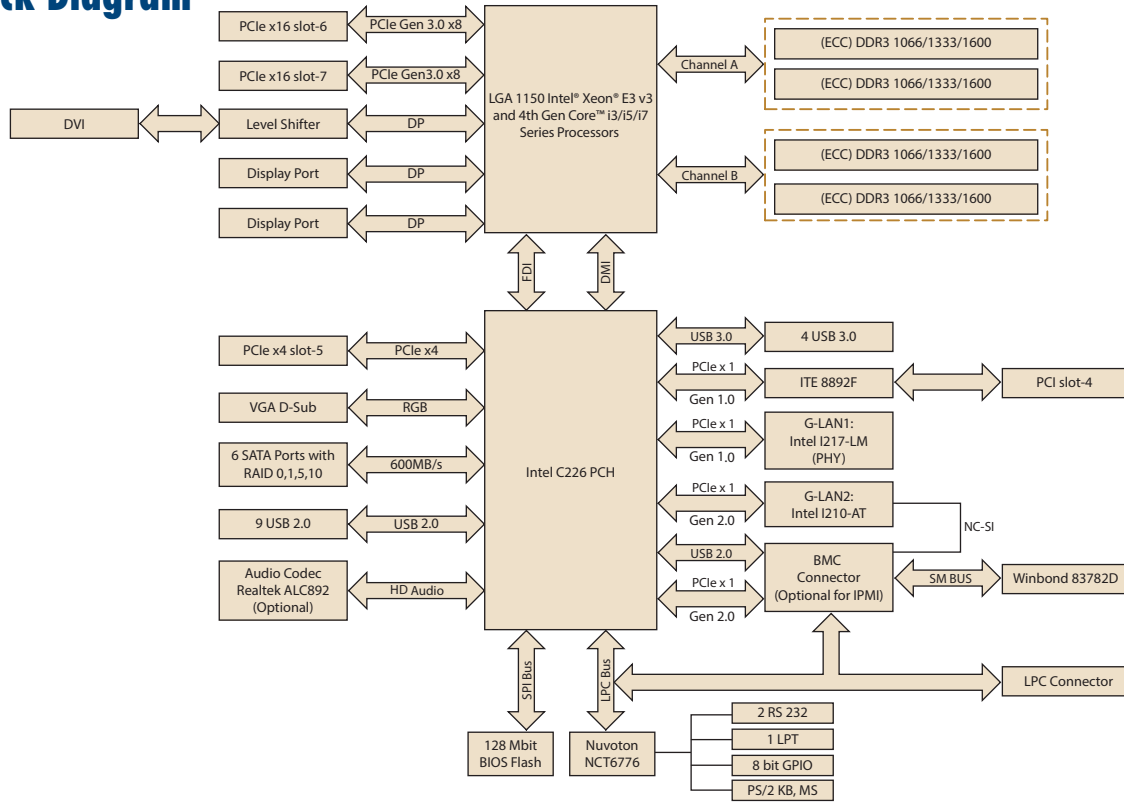

Ordering Information

Part Number	Chipset	Memory	LAN	DVI	Display Port	IPMI	PCI / PCIe Slots
ASMB-584G2-00A1E	C226	DDR3 ECC UNB/Non-ECC	2	1	2	Optional Module	1 / 3
ASMB-584G2-00A2E*	C226	DDR3 ECC UNB/Non-ECC	2	1	2	Optional Module	0 / 3
ASMB-584VG-00A1E	C226	DDR3 ECC UNB/Non-ECC	1	1	N/A	N/A	1 / 3

*ASMB-584G2-00A2E is designed for 1U & 2U chassis with riser.

Packing List

Part Number	Description	Quantity
2066S58402	Driver CD	x 1
2006S58410	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
19Z0000470T000	I/O shield	x 1

I/O View



ASMB-584G2-00A1E
ASMB-584G2-00A2E



ASMB-584VG-00A1E

Optional Accessories

Part Number	Description
1700002204	Dual port USB 2.0 cable (27 cm) with bracket
1700008461	Four port USB 2.0 cable (30.5 cm) with bracket
1960052651N021	LGA 1151/1150/1155 CPU cooler for 2U/4U and wallmount chassis (TDP up to 95W)
1960049408N001	LGA 1151/1150/1155 1U CPU Cooler (TDP up to 95W)
19Z0001023T000	1U I/O shield
1700008809	Printer port cable kit (25 cm)
1700020294-01	Printer port cable kit (42 cm)
1701090401	COM port cable with bracket (40 cm)
1700020277-01	Dual port USB 3.0 cable with bracket (30 cm)
ASMB-RF348-21A1E	2U riser card (PCIe x16 to 2 PCIe x4 + 1 PCIe x8)
AIMB-RF10F-01A1E	1U riser card (PCIe x16 to PCIe x16)
IPMI-1000-00A1E	IPMI 2.0 Module
968EMLSAP2	SUSIAccess Pro 3.0
PCA-TPM-00A1E	TPM Module with Infineon TPM 1.2 solution

Note 1: To enable Intel vPro feature, PCA-TPM-00A1E must be installed. TPM and IPMI modules are installation alternatives.

Note 2: Purchasing ASMB-584's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible with ASMB-584.