



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ASMB-815

**LGA 3647-P0 Intel® Xeon® Scalable ATX Server Board with 6 DDR4, 5 PCIe x8 or 2 PCIe x16 and 1 PCIe x8, 8 SATA3, 6 USB3.0, Dual 10GbE, IPMI**

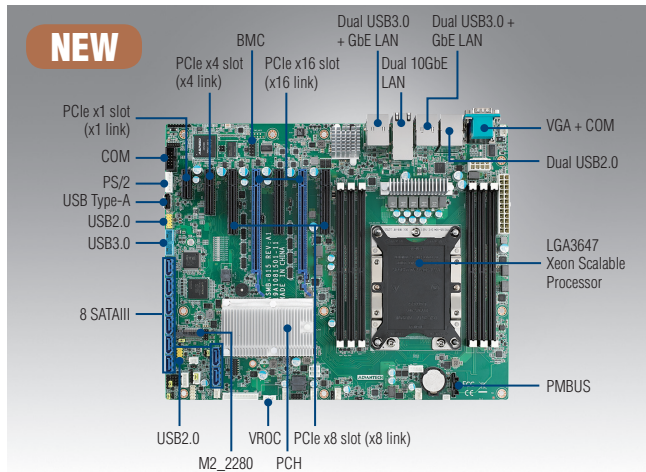

## Features


- ATX Server Board with Xeon® Scalable processors
- DDR4 2666 MHz RDIMM up to 192 GB (6 DIMMs)
- Five PCIe x8 or two PCIe x16 and 1 PCIe x8
- Intel® X557-AT2 dual 10GbE ports
- Eight SATA3 and one M.2 connectors (SATA / PCIe compatible)
- 0 ~ 60 °C ambient operation temperature range



## Specifications

Form Factor	ATX form factor	
Processor System	Socket	Intel LGA 3647-P0
	CPU type	Intel Xeon Scalable processors (CPU cooler should be purchased separately and TDP up to 205W)
Core Logic	Chipset	Intel C620 chipset
Memory	Total slots	6 (1 DIMM per channel)
	Capacity	Maximum 192 GB ECC RDIMM
	Memory type	DDR4 ECC-REG 2133/2400 /2666 MHz DIMM
	Memory size	4 GB, 8 GB, 16 GB, 32 GB
Expansion Slots	Total PCI/PCI-X/PCIe slots	7
	Slot location 1	PCIe x1 slot (x1 link), signal from PCH
	Slot location 2	PCIe x4 slot (x4 link), signal from PCH
	Slot location 3	PCIe x8 slot (0 or x8 link), signal from CPU
	Slot location 4	PCIe x16 slot (x8 or x16 link), signal from CPU
	Slot location 5	PCIe x8 slot (0 or x8 link), signal from CPU
	Slot location 6	PCIe x16 slot (x8 or x16 link), signal from CPU
Graphics	VGA	Aspeed AST 2500/2510
	IDE controller	-
Storage	SATA controller	Intel C620: 8 x SATA3 + 1 x M.2 6 Gb/s ports Intel Rapid Storage Technology (for Windows only) (SATA0-SATA7 supports software RAID 0, 1, 10 & 5)
	SAS controller	-
Networking	GbE/10GbE LAN	2 x Intel I210AT / Intel X557-AT2 (dual 10GbE ports)
Onboard I/O Connectors	Floppy connector	-
	PSU connector	24-pin SSI power connector + 1 x 8-pin SSI 12 V power connector + 4-pin SSI 12 V power connector
	USB connector	4 x USB2.0 ports (two onboard headers) + 2 x USB3.0 ports (one onboard header) + 1 x Type-A USB2.0 port
	Fan header	6 x 4-pin (5 for system + 1 for CPU)
	SMBus	1
	Chassis intruder	1
	Front LAN LED	1
	Audio Header	1
	PS/2 KB/Mouse	1
	Serial port header	1
	Rear I/O Connectors	External serial port
External USB port		4 (USB3.0) + 2 USB (2.0)
VGA port		1
RJ-45		5 (1 port dedicated for IPMI function)
PS/2 KB/mouse		-
Infiniband		-
Management Solution	Software	-
	Out of band remote management	Yes (ASMB-815I & ASMB-815T2 SKUs)
Monitoring	CPU temperature	Yes
	System Monitoring	Yes
Watchdog Timer	Output	System reset
	Interval	Programmable 1 ~ 255 sec/min
Power Requirement	Power On	3.3V      5V      12V      5Vsb      -12V      12V_8P
	(205W CPU@2.5GHz DDR4 2400 4G*6)	2.77127A      7.00549A      0.57829A      0.132880A      0.063951A      17.5801A
Environment	Operating	Non-operating
	Temperature	0 ~ 60 °C, depends on CPU speed and cooler solution
	Humidity	10% ~ 95%
Physical Characteristics	Dimension (L x H)	304.8 x 244 mm (12" x 9.6")

### Block Diagram

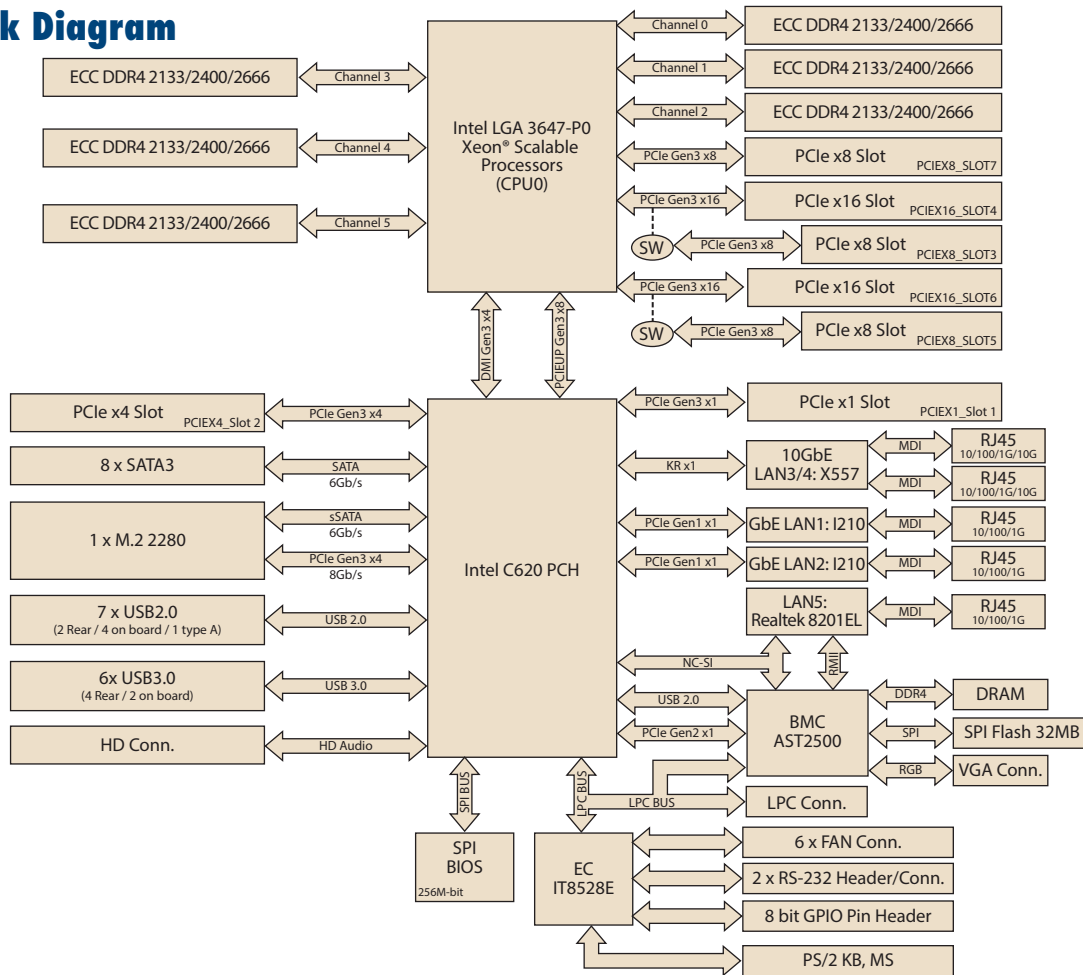

### Ordering Information

Part Number	Chipset	Memory	GbE/10GbE LAN	IPMI	VGA Chip
ASMB-815-00A1E	C621	DDR4 RDIMM	2/-	-	AST 2510
ASMB-815I-00A1E	C621	DDR4 RDIMM	2/-	Yes	AST 2500
ASMB-815T2-00A1E	C622	DDR4 RDIMM	2/2	Yes	AST 2500

### Packing List

Part Number	Description	Quantity
2066815I00	Driver CD	x 1
2006815I10	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700019748	CPU power cable	x 2
1930007120-01	Screw for M.2 device	x 2
1960076488T000	I/O shield	x 1

### Optional Accessories

Part Number	Description
PCA-AUDIO-HDB1E	HD Audio-card
PCA-TPM-00B1E	TPM 2.0 Module by LPC
1960081603N001	LGA-3647 narrow CPU cooler for 2U/4U chassis
1960081155N001	LGA-3647 narrow CPU cooler for 1U chassis
1700002204	Dual port USB cable (27 cm) with bracket
1700008461	Four port USB cable (30.5 cm) with bracket
1700020277-01	Dual port USB 3.0 cable (30 cm) with bracket
1701090401	COM port cable (40 cm) with bracket
1700019268-11	PS/2 port cable (35 cm)
1960063434N000	Cable bracket for 1700019268-11
1960082347T000	For 1U chassis IO shield

### I/O View



ASMB-815T2-00A1E



ASMB-815I-00A1E



ASMB-815-00A1E