



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






AT-2600 Series

Specifications herein are subject to change without notice.



Waterproof Fixed Attenuators (N Type)

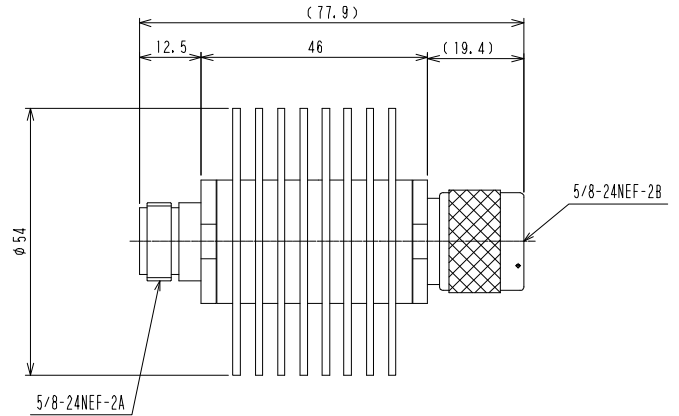

◆ Features

1. It conforms to a waterproof and a dustproof standard of IEC529 and IP65W. (*1 engagement)
2. A high frequency performance excellent by Hirose Electric original high frequency matching technology is achieved.
3. The metal film resistor is used for the attenuation element and the high trust design.

◆ Typical Data

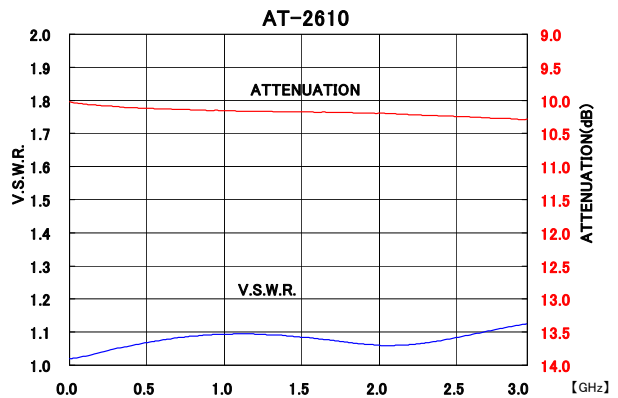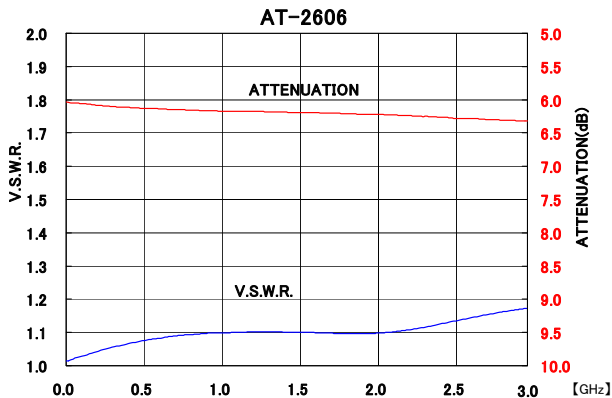

◆ Applications

Mobile Phone Base Stations and Other High Frequency Applications.

◆ Specifications

*1. This product is not intended to be waterproof about the connector opening. When connecting this product with cable or other electric device, be careful so that there is no water based material leakage in the connector. Moreover, be sure that the start point of the processing (taping etc) is roof of the connector regarding the waterproof processing at the mating part of the connector.

Part Number	Frequency (GHz)	V.S.W.R. (MAX)	Attenuation (dB)	Power (W)	Connectors
AT-2606	DC-3	1.3	5.3-6.7	16	N-P·J
AT-2610	DC-3	1.3	9.0-11.0	16	N-P·J