



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV	ECO	DATE
G1	22170	8/7/2009
H	24010	12/15/2011
J	25198	10/3/2014

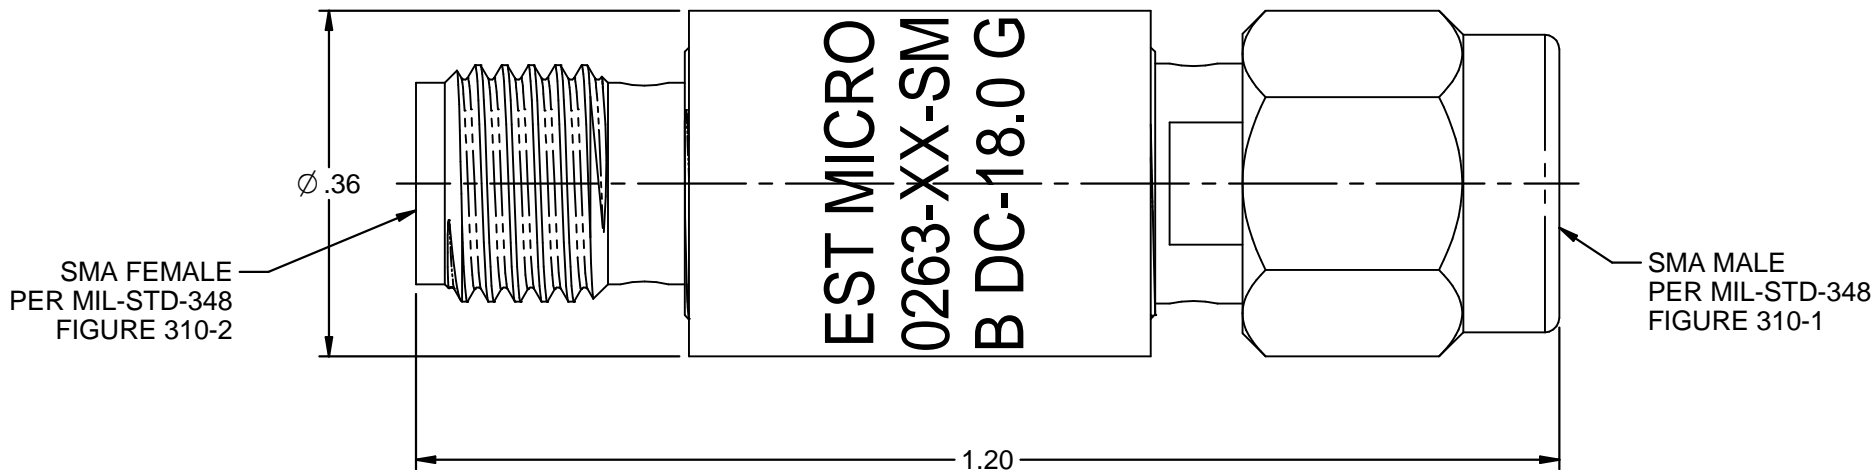

NOTES: UNLESS OTHERWISE SPECIFIED.


1. MATERIAL & FINISH:

- 1.1 HOUSING, BARREL & COUPLING NUT: PASSIVATED STAINLESS STEEL
- 1.2 DIELECTRIC: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.3 GASKET: SILICONE RUBBER

2. ELECTRICAL SPECIFICATIONS:

- 2.1 FREQUENCY RANGE: DC - 18.0 GHz
- 2.2 ATTENUATION VALUES AND ACCURACY
 - 2.2.1 0 dB +0.3 dB
 - 2.2.2 1 TO 10 dB ±0.3 dB
 - 2.2.3 11 TO 20 dB ±0.5 dB
 - 2.2.4 21 TO 30 dB ±1.0 dB
- 2.3 VSWR (MAX): 1.07+.015f(GHz)
- 2.4 MAXIMUM INPUT POWER:
 - 2.4.1 AVERAGE: 2 WATTS AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
 - 2.4.2 PEAK: 200 WATTS FOR A DUTY CYCL OF 5 X 10⁻⁴, MAX PULSE DURATION OF 5 MICROSECONDS.

3. OPERATING TEMPERATURE RANGE: -65°C TO +125°C

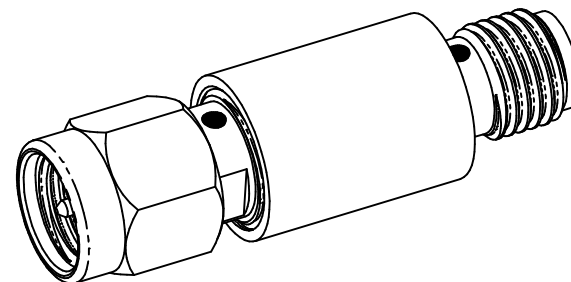

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traded or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No. ATT-0263-XX-SMA-02	MIDWEST MICROWAVE		
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU	Cage Code 34078	Title: ATTENUATOR, 0-30 dB	
	UNLESS OTHERWISE SPECIFIED: UNITS: INCH .XX ±.02 .XXX ±.005 ANGLES ±1°	3RD ANGLE PROJECTION 	Drawing No. ATT-0263-XX-SMA-02-01	Rev. J
	Date: 10/13/2014	Drawn by: C. WALLACE	Size A	Workmanship Std: NONE
		DO NOT SCALE DRAWING	Sheet 1 of 1	