



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!











Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

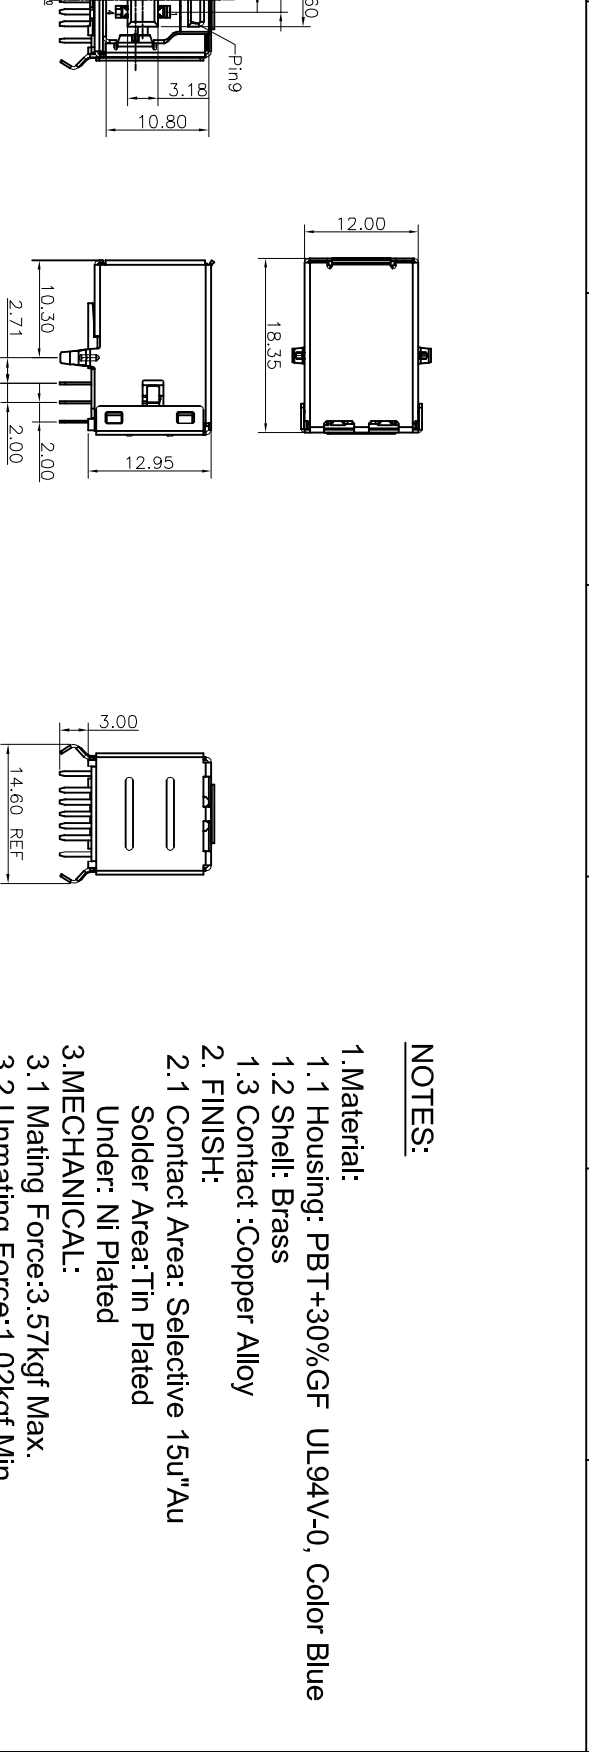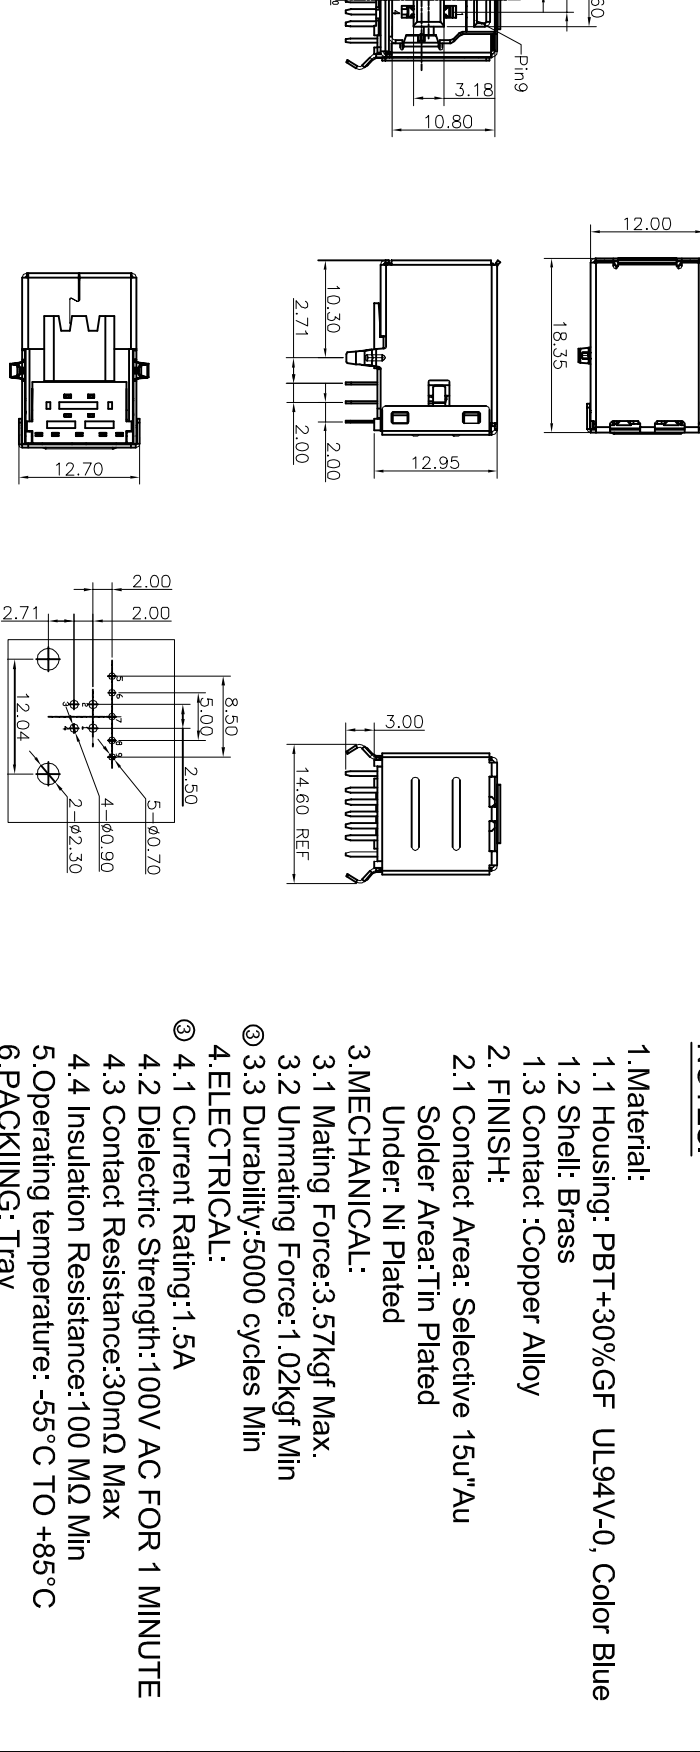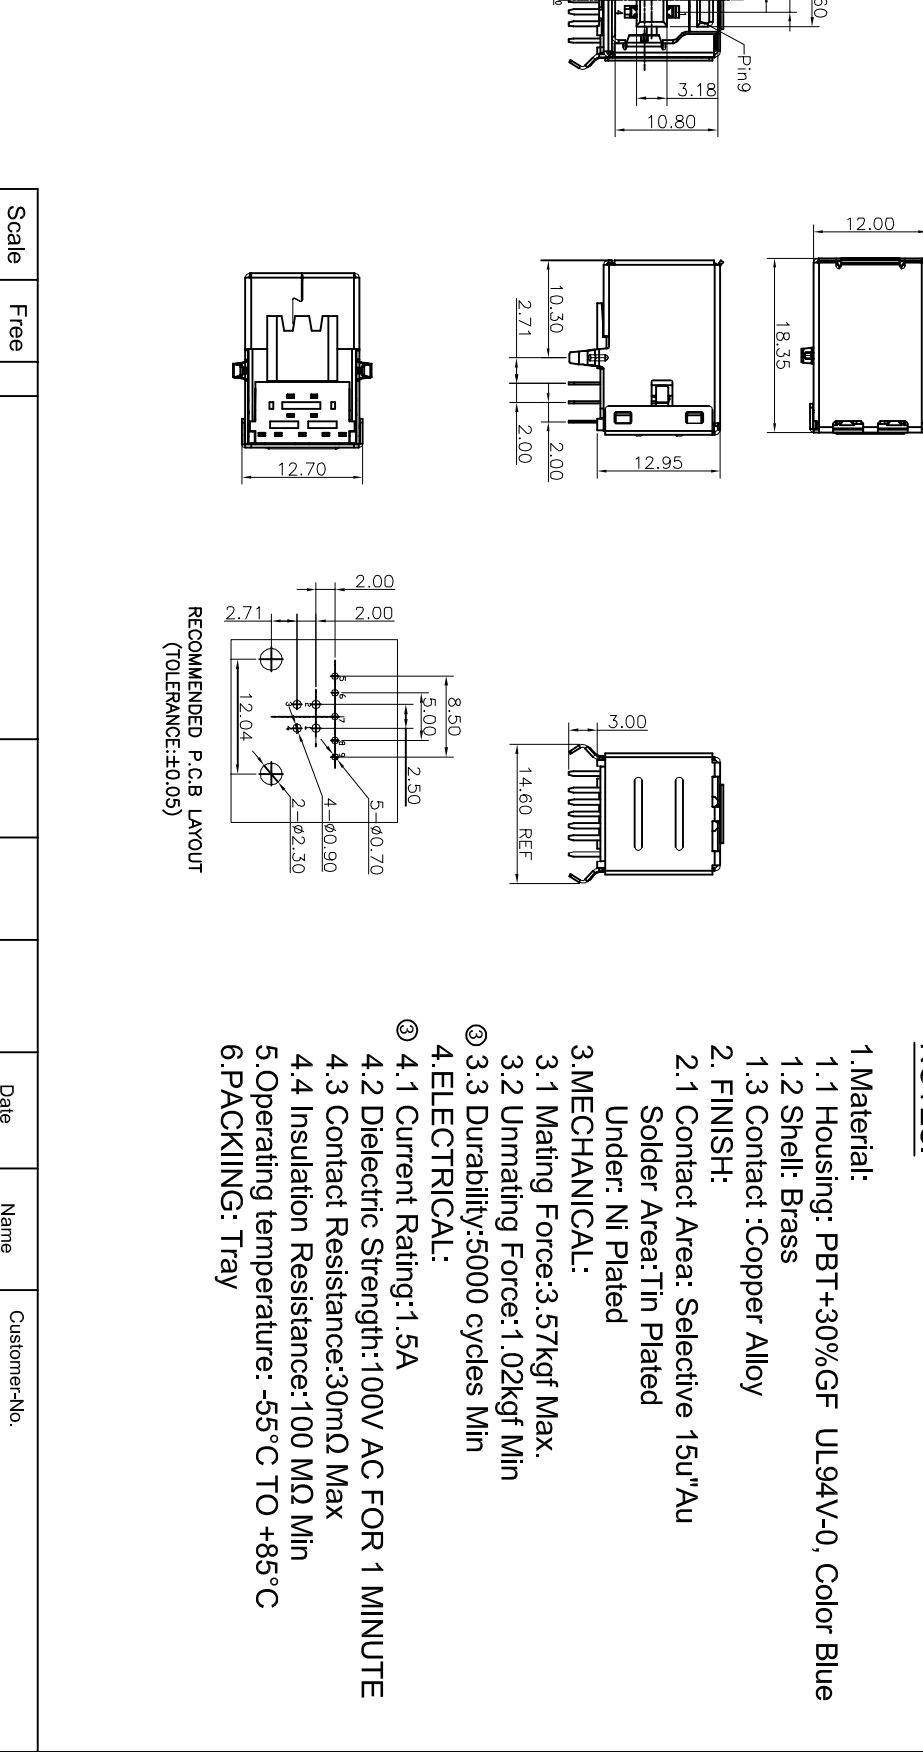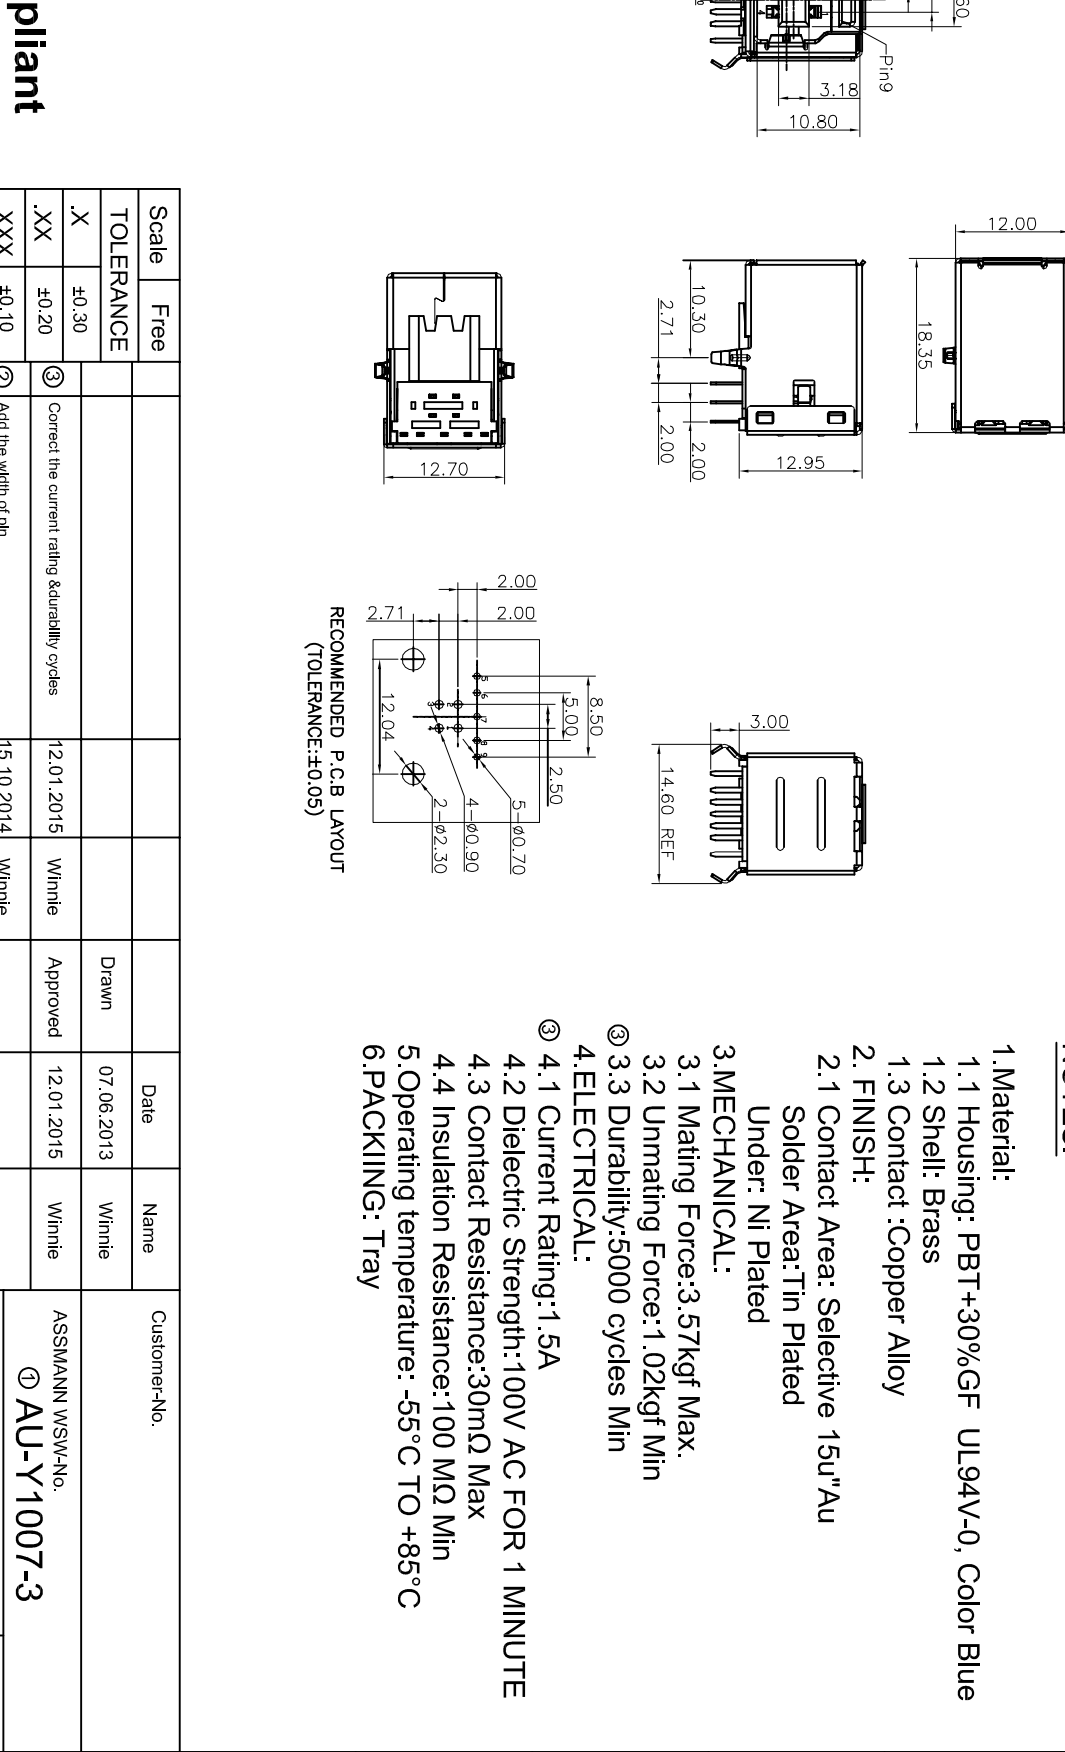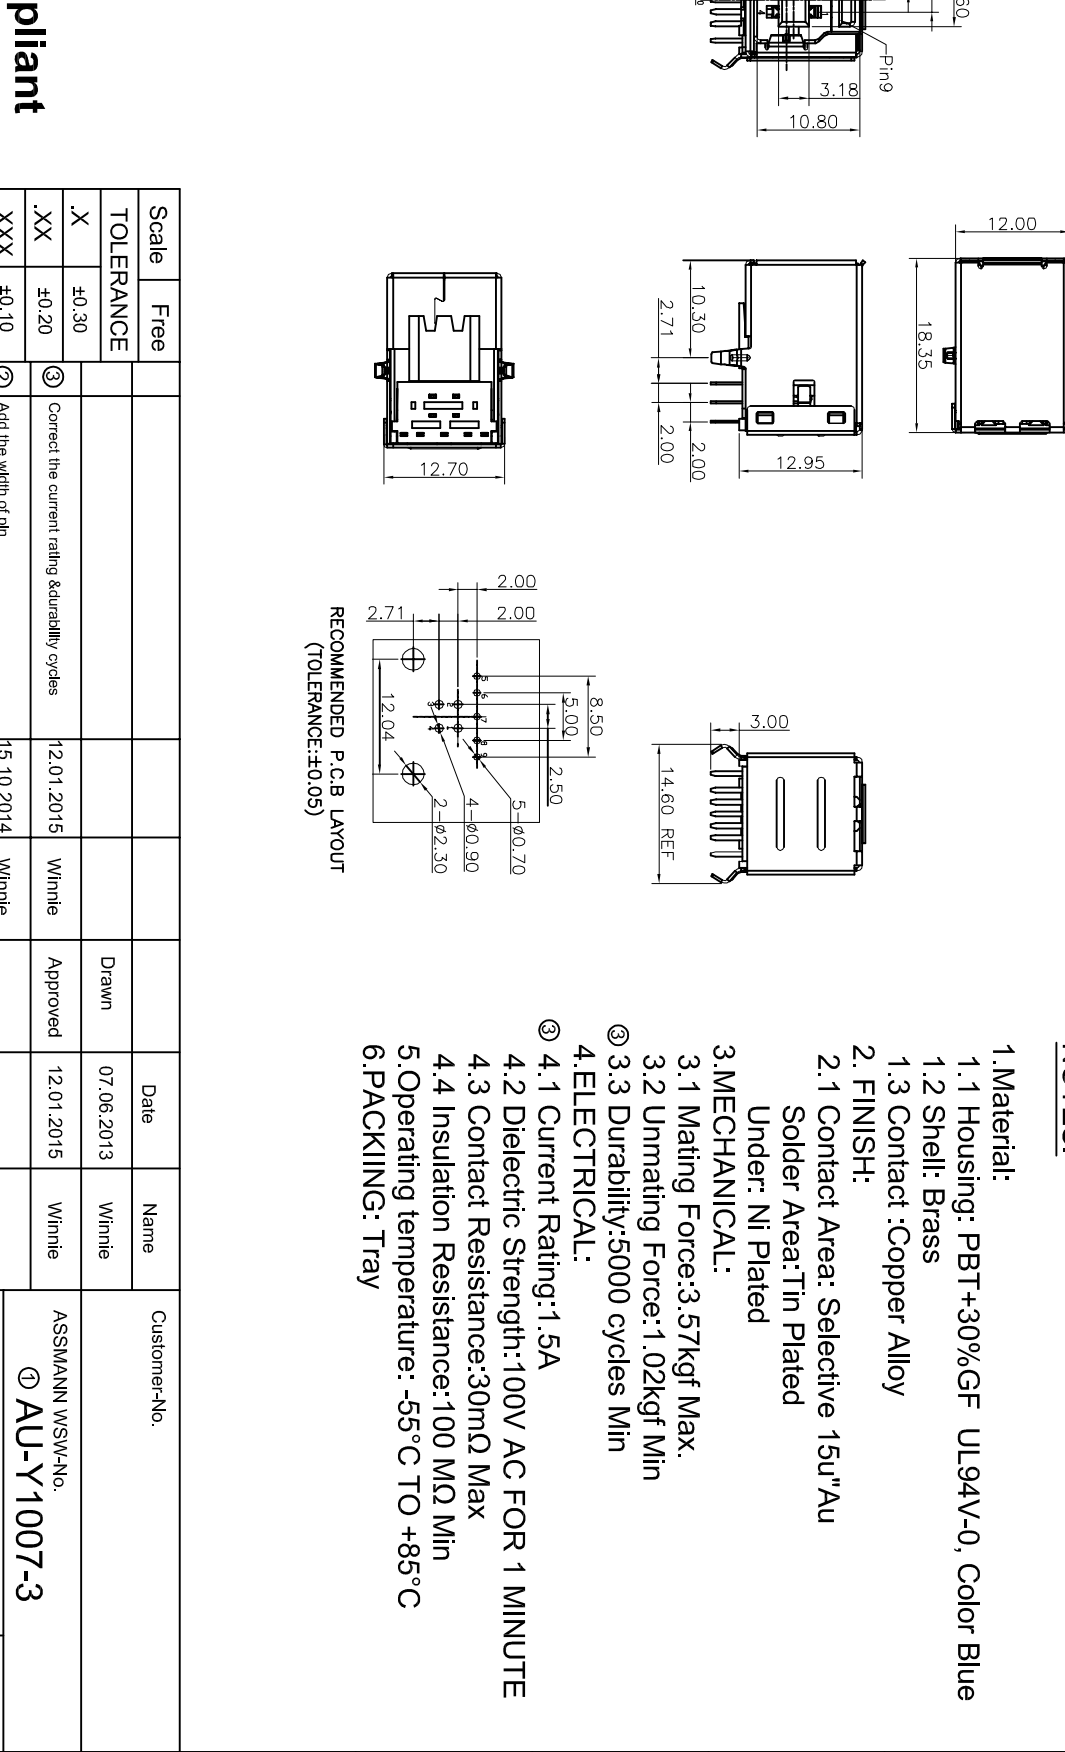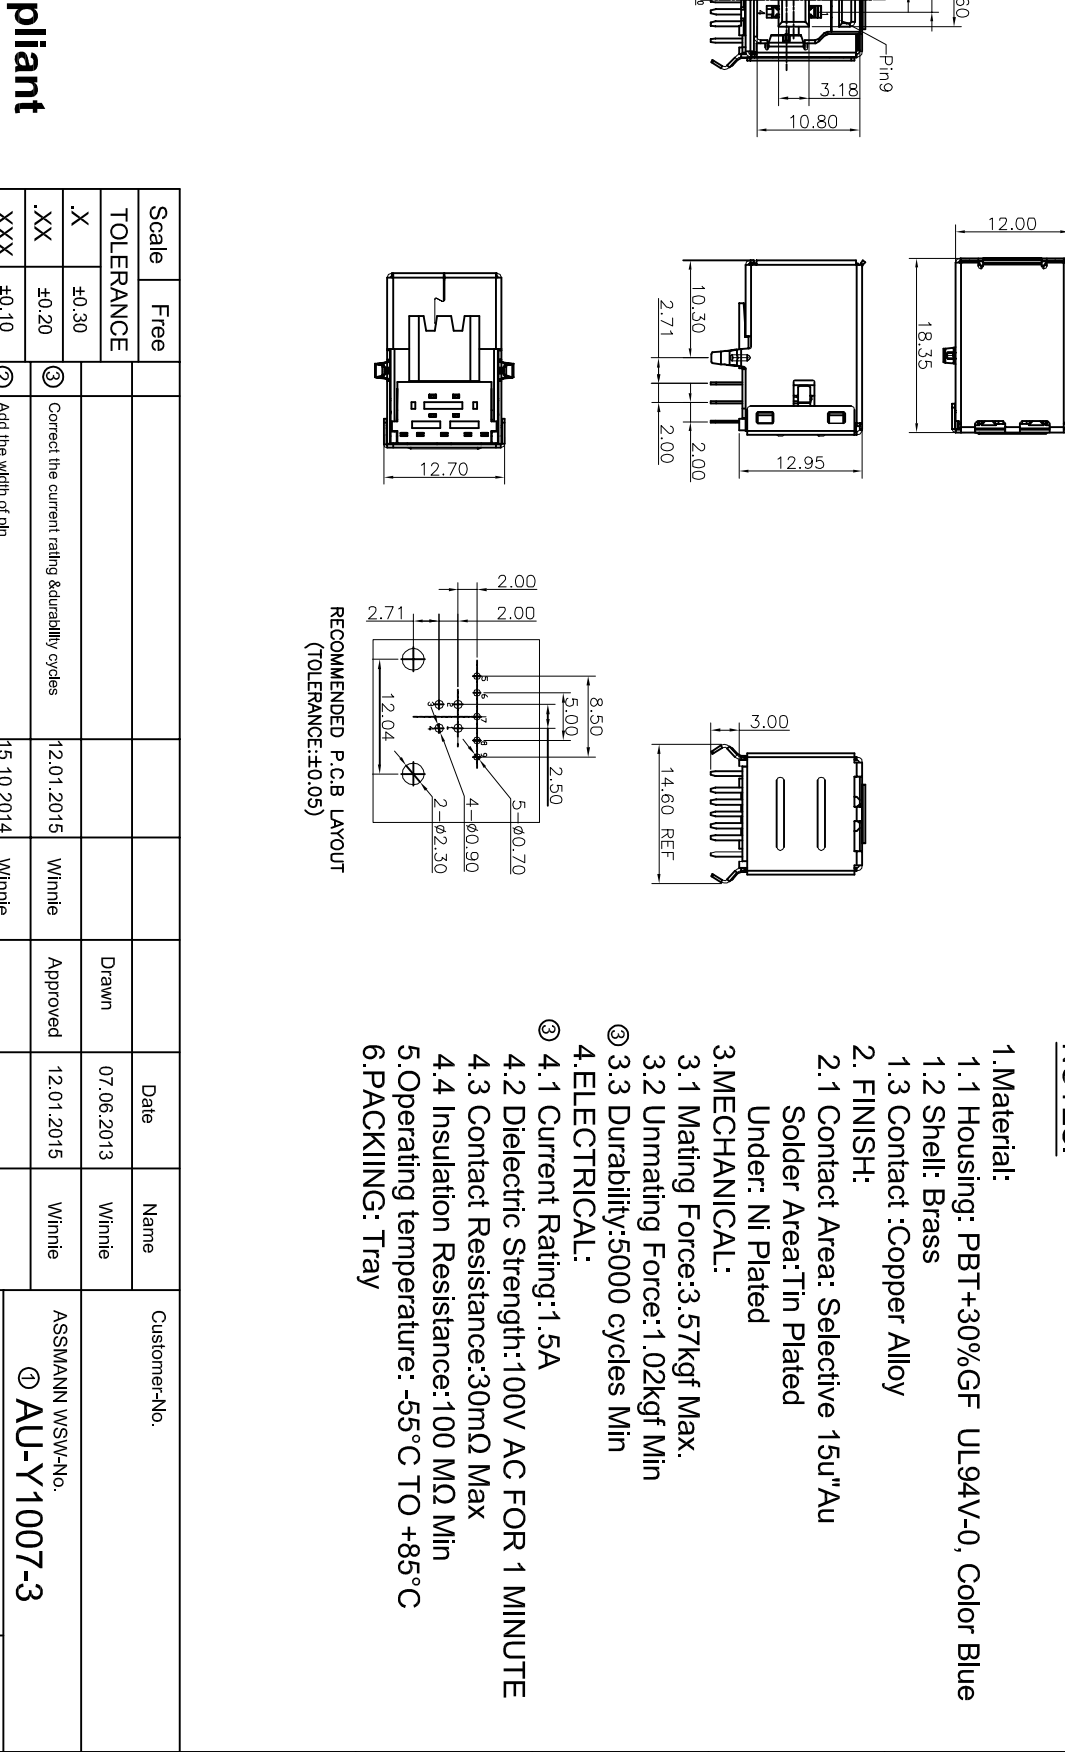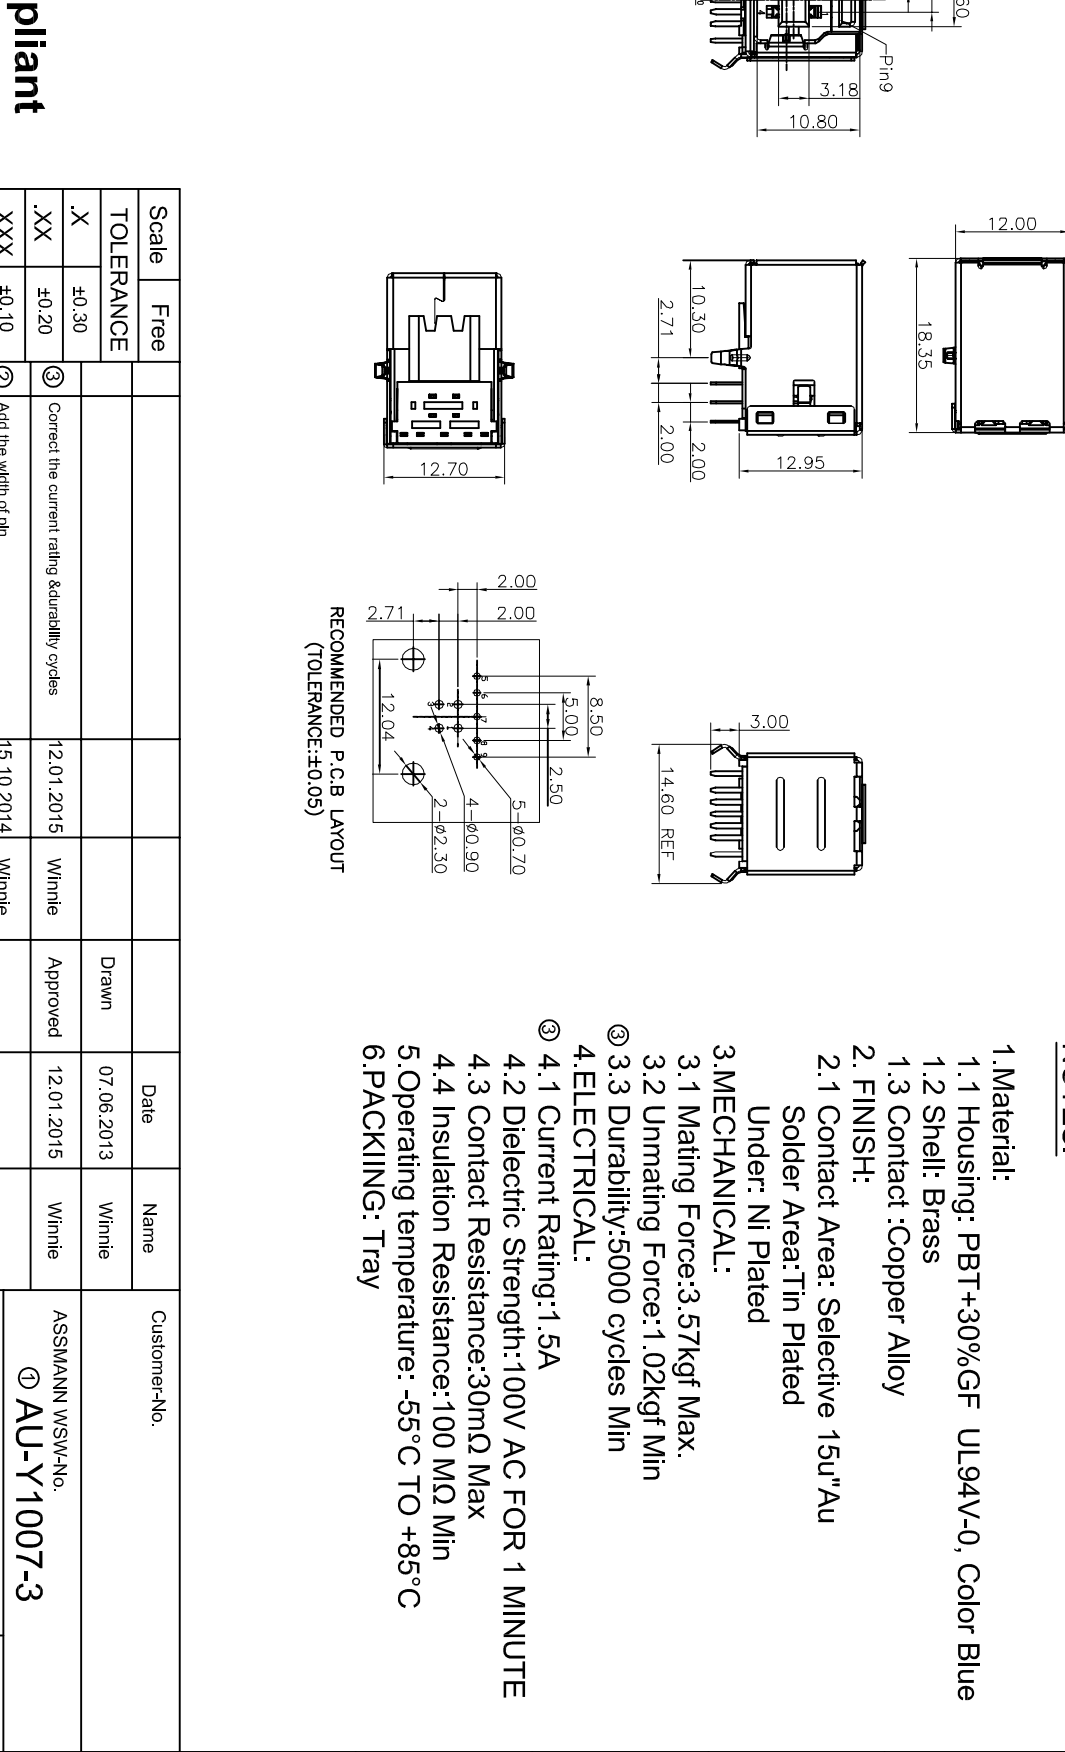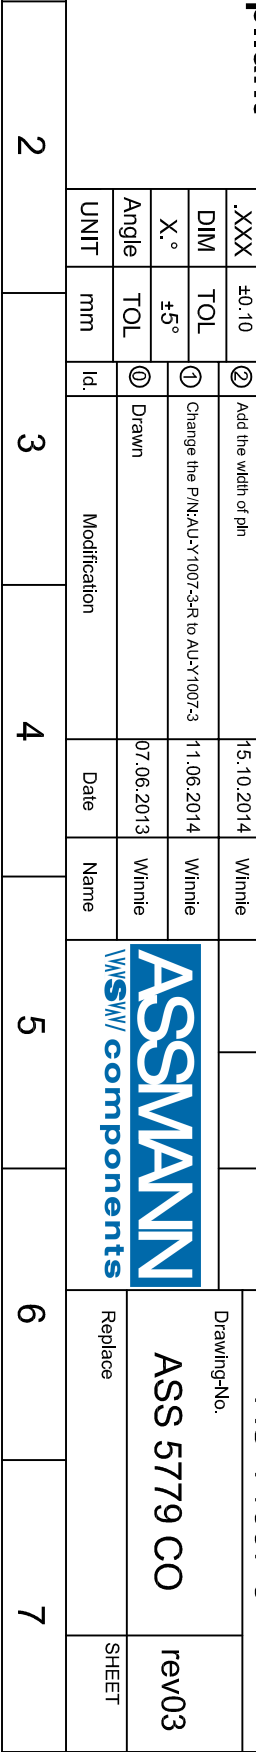

A	1	2	3	4	5	6	7	A
B	 <p>Technical drawings showing dimensions: 2.50, 1.00TYP, 5.60, 3.18, 10.80, 12.00, 18.35, 12.95, 10.30, 2.00, 2.71, 2.00, 2.00, 8.50, 5.00, 2.50, 5-∅0.70, 4-∅0.90, 2-∅2.30, 12.04, 14.60 REF, 5.00.</p>							B
C	<p>NOTES:</p> <ol style="list-style-type: none"> Material: <ol style="list-style-type: none"> Housing: PBT+30%GF UL94V-0, Color Blue Shell: Brass Contact :Copper Alloy FINISH: <ol style="list-style-type: none"> Contact Area: Selective 15u"Au Solder Area: Tin Plated Under: Ni Plated MECHANICAL: <ol style="list-style-type: none"> Mating Force:3.57kgf Max. Unmating Force:1.02kgf Min Durability:5000 cycles Min ELECTRICAL: <ol style="list-style-type: none"> Current Rating:1.5A Dielectric Strength:100V AC FOR 1 MINUTE Contact Resistance:30mΩ Max Insulation Resistance:100 MΩ Min Operating temperature: -55°C TO +85°C PACKING: Tray <p>RECOMMENDED P.C.B LAYOUT (TOLERANCE:±0.05)</p> 							C
D	<p>12.70</p> 							D
E	<p>12.70</p> 							E
F	<p>12.70</p> 							F
G	<p>12.70</p> 							G
H	<p>12.70</p> 							H
A	<p>12.70</p> 							A

RoHS compliant

Scale	Free	Customer-No.	
TOLERANCE		Date	Name
.X	±0.30	07.06.2013	Winnie
.XX	±0.20	12.01.2015	Winnie
.XXX	±0.10	15.10.2014	Winnie
DIM	TOL	ASSMANN WSW-No.	
X. °	±5°	① AU-Y1007-3	
Angle	TOL	Drawing-No.	
UNIT	mm	ASS 5779 CO	
		rev03	
		SHEET	

1	2	3	4	5	6	7	H
---	---	---	---	---	---	---	---



ASSMANN WSW components