



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Data Sheet

Total Power: 25 W
Input Voltage: 24 or 48 V
of Outputs: Single and Dual

SPECIAL FEATURES

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range:
9 - 36 V_{in}, 18 - 75 V_{in}
- Very high efficiency up to 90%
- Operating temperature range:
-40 °C to +85 °C (with derating)
- Output voltage adjustable
- I/O isolation voltage 1500 Vdc
- Remote ON/OFF control
- Metal case with isolated baseplate
- CSA/UL/IEC/EN 60950-1 Safety Approval

SAFETY

- cUL/UL 60950-1
- IEC/EN 60950-1



Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	90% @ 12 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.2%
Load regulation	±1.0%
Noise/ripple	150 mV
Overload protection	150% typ of I _o max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	285 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	2000 pF


Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	444 Khrs calculated


Ordering Information

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Max Out Cap	Power
AXA06F18-L	9 - 36 Vdc	3.3 V	6 A	87%	10300 μ F	19.8 W
AXA05A18-L	9 - 36 Vdc	5 V	5 A	89%	6800 μ F	25 W
AXA02B18-L	9 - 36 Vdc	12 V	2.09 A	89%	1200 μ F	25 W
AXA02C18-L	9 - 36 Vdc	15 V	1.67 A	90%	750 μ F	25 W
AXA01BB18-L	9 - 36 Vdc	\pm 12 V	\pm 1.04 A	89%	680 μ F	25 W
AXA01CC18-L	9 - 36 Vdc	\pm 15 V	\pm 0.84 A	89%	380 μ F	25 W
AXA06F36-L	18 - 75 Vdc	3.3 V	6 A	88%	10300 μ F	19.8 W
AXA05A36-L	18 - 75 Vdc	5 V	5 A	90%	6800 μ F	25 W
AXA02B36-L	18 - 75 Vdc	12 V	2.09 A	90%	1200 μ F	25 W
AXA02C36-L	18 - 75 Vdc	15 V	1.67 A	90%	750 μ F	25 W
AXA01BB36-L	18 - 75 Vdc	\pm 12 V	\pm 1.04 A	89%	680 μ F	25 W
AXA01CC36-L	18 - 75 Vdc	\pm 15 V	\pm 0.84 A	89%	380 μ F	25 W

Mechanical Dimensions

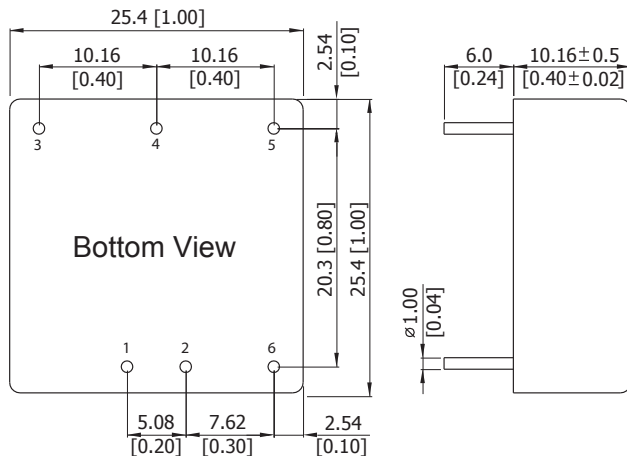

Pin Connections		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

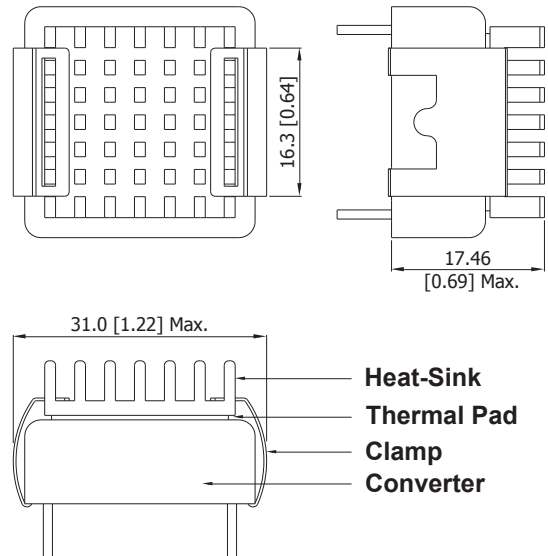

- All dimensions in mm (inches)
- Tolerance: X.X \pm 0.5 (X.XX \pm 0.02)
X.XX \pm 0.25 (X.XXX \pm 0.01)
- Pin diameter \varnothing 1.0 \pm 0.05 (0.04 \pm 0.002)

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com