



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

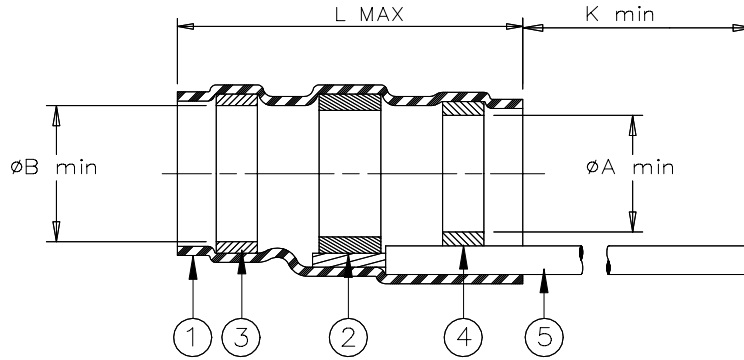

Product Revision		Product Dimensions				Cable Dimensions				
Product Name		L max	øA min	øB min	K min	øD max	øE min	øF min	øG max	J±0.5 (J±0.02)
B-003-00	K	16.5 (0.650)	2.6 (0.100)	3.1 (0.120)	150 (5.900)	2.6 (0.100)	1.6 (0.063)	1.5 (0.060)	3.1 (0.120)	7 (0.275)
B-003-01	J	16.5 (0.650)	4.4 (0.175)	4.9 (0.195)	150 (5.900)	4.4 (0.175)	2.2 (0.085)	2.1 (0.080)	4.9 (0.195)	7 (0.275)
B-003-02	L	21.5 (0.845)	6.9 (0.270)	7.4 (0.290)	150 (5.900)	6.9 (0.270)	3.4 (0.135)	3.2 (0.125)	7.4 (0.290)	7 (0.275)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
- MELTABLE INSERT: Thermally stabilized thermoplastic. Color: blue.
- MELTABLE INSERT: Thermally stabilized thermoplastic. Color: clear.
- GROUND LEAD: RAYCHEM 55A0111-24 in accordance with MIL-W-22759/32 AWG 24 stranded tin plated copper.
Color: blue.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables, rated for 105°C minimum, meeting the dimensional criteria listed, and having tin or silverplated shields.
- Install using Raychem-approved convection or infrared heating tools in accordance with Raychem installation procedure RPIP-709-00.
- Temperature range: -55°C to +125°C.

For best results, prepare the cable as shown:

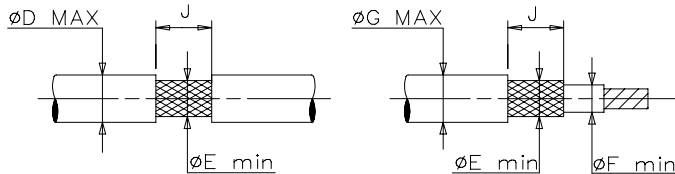

* A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD LOW TEMPERATURE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: B-003-0X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980560		REPLACES: B0030X	
DRAWN BY: M. FORONDA	DATE: 06/23/98	PROD. REV. SEE TABLE	DOC ISSUE: 3	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.