



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

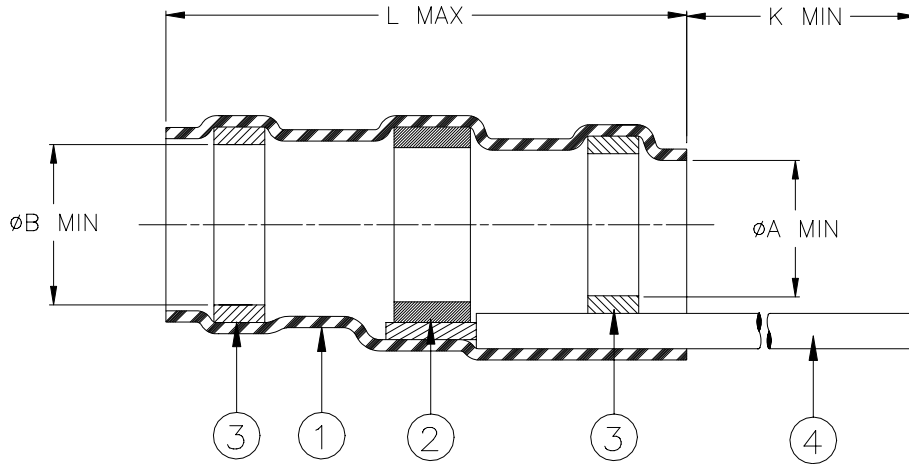

Product Revision		Product Dimensions				Cable Dimensions				Color Code (Item 3)
Part Name		L max	A min	B min	K min	D max	E min	F min	J±1.00 (J±0.040)	
B-008-51	A	31.00 (1.220)	2.30 (0.091)	3.00 (0.118)	150 (5.900)	2.30 (0.091)	1.50 (0.060)	0.80 (0.032)	11.00 (0.433)	Red
B-008-52	A	36.00 (1.417)	4.30 (0.169)	5.10 (0.200)	150 (5.900)	4.30 (0.169)	2.10 (0.083)	1.20 (0.047)	11.00 (0.433)	Blue
B-008-53	A	42.00 (1.654)	6.80 (0.270)	7.30 (0.290)	150 (5.900)	6.80 (0.268)	3.40 (0.134)	2.50 (0.098)	11.00 (0.433)	Clear


MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI J-STD-006.
FLUX: TYPE ROM1 per ANSI J-STD-004.
- MELT TABLE RINGS: Thermally stabilized thermoplastic.
- GROUND LEAD: RAYCHEM 44A0111-20 in accordance with MIL-W-81044/12 or better, AWG 20 stranded tin plated copper. Color: white

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables rated for 105°C minimum, meeting the dimensional criteria listed and having bare copper or tin plated shields.
- Temperature range: -55°C to +125°C.
- Install using Raychem-approved convection or infrared heating tools in accordance with Raychem installation procedure RPIP-709-00.

For best results, prepare the cable as shown:

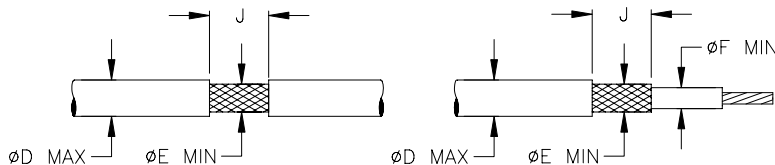

 307 Constitution Drive Menlo Park, CA 94025, USA		Wire and Harnessing Products	TITLE : SOLDERSLEEVE DEVICE WITH PRE-INSTALLED LEAD LOW TEMPERATURE			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.			DOCUMENT NO.: B-008-5X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D020015	REPLACES: D981682		
DRAWN BY: m. foronda	DATE: 4-Mar-02	PROD. REV. SEE TABLE	DOC ISSUE: 4	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.