



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

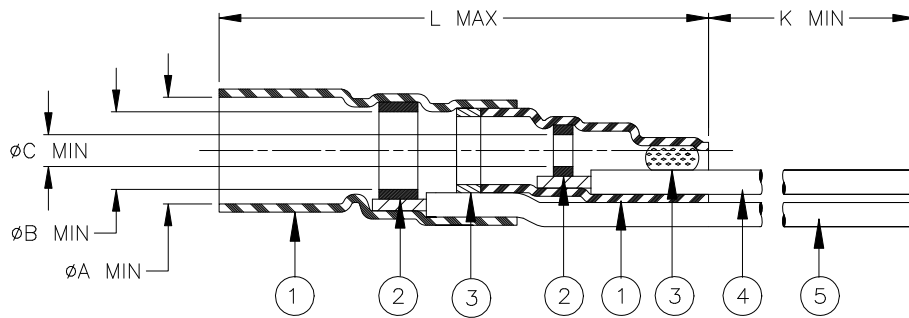


Product Revision		Product Dimensions					Cable Dimensions				
Product Name		ϕA min	ϕB min	ϕC min	L max	K min	ϕD	ϕE	ϕF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-020-42-05	B	6.30 [.248]	4.60 [.181]	2.80 [.110]	31.00 [1.220]	180.00 [7.087]	2.20 [.087] to 5.70 [.224]	2.10 [.083] to 4.50 [.177]	0.30 [.012]	17.0 [.669]	6.0 [.236]

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. MELTABLE RINGS: Thermally stabilized thermoplastic.
4. CONDUCTOR LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: white.
5. GROUND LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: black.

APPLICATION

1. This controlled soldering device is designed for termination of coaxial cables to connectors and printed circuit boards.
They will terminate the tin or silver plated center conductor and the single or double tin or silver plated copper braid of a coaxial cable having an insulation rated for at least 125°C.
2. Temperature range: -55°C to +150°C.
3. Install using Raychem-approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

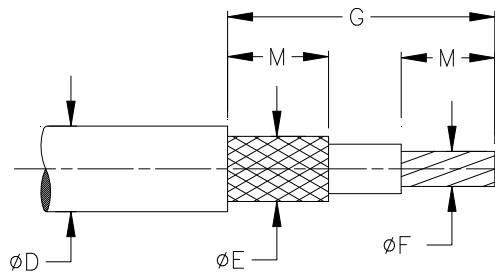

NOTE: For best results, prepare the cable as illustrated above.

TE Connectivity		<i>Raychem Devices</i>	TITLE : COAXIAL SOLDERSLLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES			
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN [.xxx] BRACKETS.</small>			DOCUMENT NO.: B-020-42-05			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DATE: 12-Jun-15	REVISED PER: ECO-15-008855		
DRAWN BY: M. FORONDA	CAGE CODE: 06090	CAD NAME: B-020-42-05.doc	PROD. REV.: SEE TABLE	REVISION: A1	SIZE: A	SHEET: 1 of 1