



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## SPECIFICATION CONTROL DRAWING

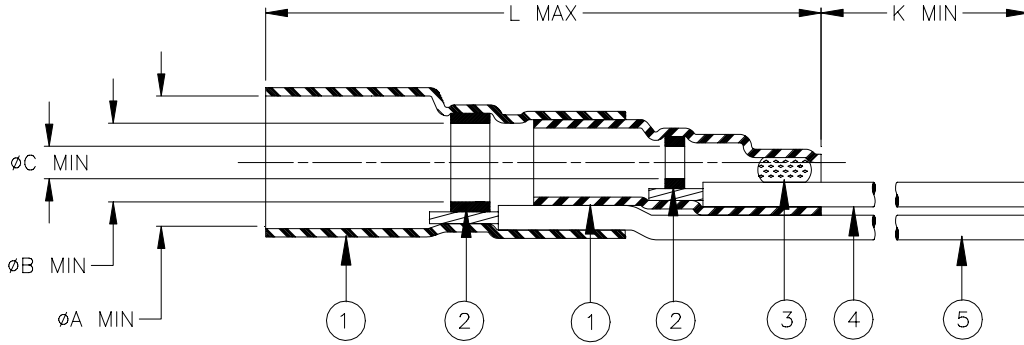

Product Revision		Product Dimensions					Cable Dimensions				
Product Name		$\phi A$ min	$\phi B$ min	$\phi C$ min	L max	K min	$\phi D$	$\phi E$	$\phi F$ min	$G \pm 0.5$ ( $G \pm 0.02$ )	$M \pm 0.5$ ( $M \pm 0.02$ )
B-040-25-01	G	4.4 (0.175)	2.8 (0.110)	1.6 (0.065)	28.0 (1.100)	150 (5.900)	1.9 (0.075) to 4.3 (0.165)	1.8 (0.075) to 2.7 (0.105)	0.3 (0.015)	19.0 (0.750)	6.0 (0.235)


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORMS WITH FLUX:  
SOLDER: TYPE Sn63 per ANSI-J-STD-006.  
FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic.
4. CONDUCTOR LEAD (Color: white): RAYCHEM 55A0112-24 in accordance with MIL-W-22759/44 AWG24, stranded, silver plated copper.
5. GROUND LEAD (Color: blue): RAYCHEM 55A0112-24 in accordance with MIL-W-22759/44 AWG24, stranded, silver plated copper.

### APPLICATION

1. This part is designed to provide an environment protected shield and conductor termination of a coaxial cable, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated shields.
2. Temperature range: -55°C to +150°C.
3. Install using Raychem approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

For best results, prepare the cable as shown:

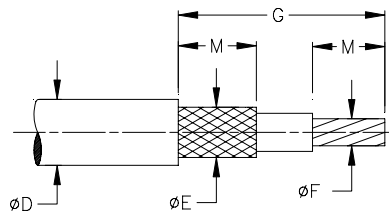

<b>Raychem Interconnect</b> <small>a division of Tyco Electronics</small> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE : <b>COAXIAL SOLDERSLLEEVE DEVICE WITH                  PRE-INSTALLED STRANDED WIRES</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>B-040-25-01</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D001324		REPLACES: N/A	
DRAWN BY: M. FORONDA	DATE: 18-Dec.-00	PROD. REV. G	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.