



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

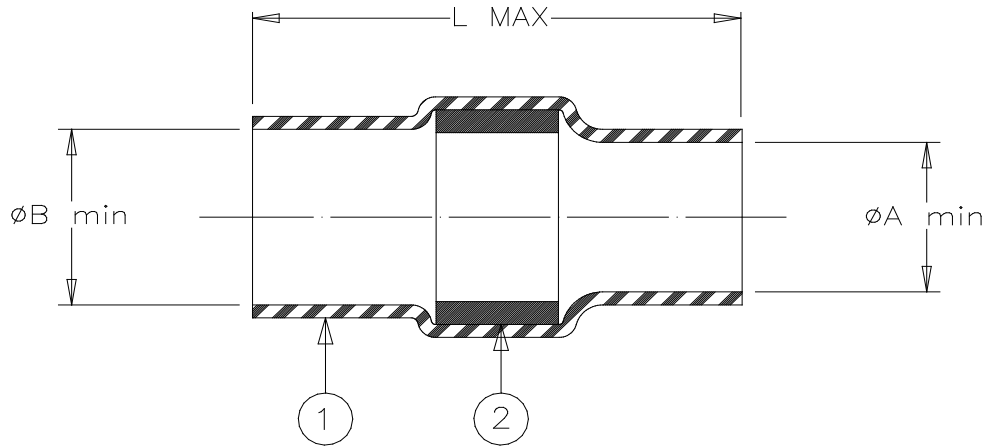

Product Revision		Product Dimensions			Cable Dimensions	
Part Name		A min	B min	L max	D max	E min
B-055-03	I	43	46	103	42	28


MATERIAL


- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Cd18 per ANSI J-STD-006.
 FLUX: TYPE ROM1 per ANSI J-STD-004.

APPLICATION

- This controlled soldering device is designed for termination of a tin plated or bare copper shield on a cable having an insulation rated for at least +85°C.
- Temperature range: -55°C to +125°C.

For best results, prepare the cable as shown:

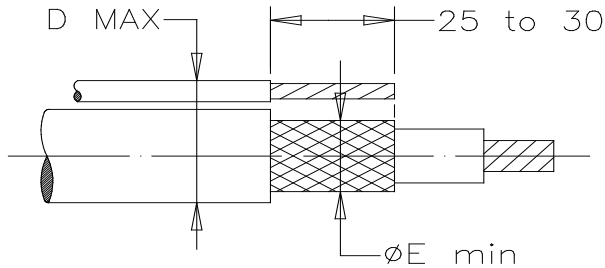

		Raychem Devices	TITLE: SHIELD TERMINATION LOW TEMPERATURE				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.			DOCUMENT NO.: B-055-03				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: ECO-16-009232		REPLACES: B05503		
DRAWN BY: R. MAPALO	DATE: 15-Oct-98	REV.: SEE TABLE	DOC ISSUE: C1	SCALE: NONE	SIZE: A	SHEET: 1 of 1	