



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## SPECIFICATION CONTROL DRAWING

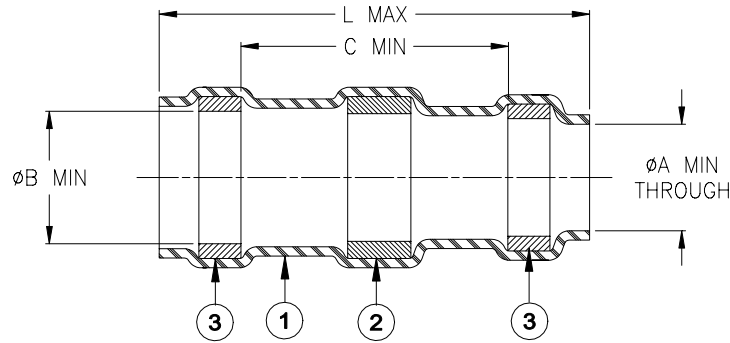

Product Revisions		Product Dimensions				Prepared Cable Dimensions				
Product Name		ØA min	ØB min	C min	L max	ØD max	ØE min	ØG max	H	J
B-152-03	A	2.50 [0.098]	3.00 [0.118]	8.50 [0.335]	25.00 [0.984]	3.00 [0.118]	1.50 [0.060]	2.50 [0.098]	8.0 ±0.5 [0.315±0.020]	8.0 ±0.5 [0.315±0.020]
B-152-05	A	4.30 [0.170]	4.80 [0.189]	9.50 [0.374]	30.00 [1.181]	4.80 [0.189]	2.00 [0.079]	4.30 [0.170]	8.0 ±0.5 [0.315±0.020]	8.0 ±0.5 [0.315±0.020]
B-152-06	A	6.00 [0.236]	6.70 [0.264]	11.50 [0.453]	33.00 [1.300]	6.70 [0.264]	3.30 [0.130]	6.00 [0.236]	10.0 ±1.0 [0.394±0.040]	11.0 ±1.0 [0.433±0.040]
B-152-07	A	6.80 [0.268]	7.30 [0.287]	11.50 [0.453]	33.00 [1.300]	7.30 [0.287]	3.30 [0.130]	6.80 [0.268]	10.0 ±1.0 [0.394±0.040]	11.0 ±1.0 [0.433±0.040]
B-152-09	A	8.50 [0.335]	9.00 [0.354]	12.50 [0.492]	36.00 [1.417]	8.50 [0.335]	4.50 [0.177]	8.00 [0.315]	11.0 ±1.0 [0.433±0.040]	12.0 ±1.0 [0.472±0.040]
B-152-11	A	10.80 [0.425]	11.50 [0.453]	13.50 [0.531]	36.00 [1.417]	9.50 [0.374]	4.50 [0.177]	9.00 [0.354]	11.0 ±1.0 [0.433±0.040]	12.0 ±1.0 [0.472±0.040]
B-152-13	A	13.00 [0.512]	15.10 [0.594]	24.00 [0.945]	46.00 [1.811]	14.00 [0.551]	7.00 [0.276]	12.00 [0.472]	16.0 ±1.0 [0.630±0.040]	17.0 ±1.0 [0.670±0.040]
B-152-17	A	17.00 [0.670]	19.00 [0.748]	24.00 [0.945]	56.00 [2.204]	17.00 [0.670]	9.00 [0.354]	14.00 [0.551]	29.0 ±2.0 [1.142±0.079]	31.0 ±2.0 [1.220±0.079]
B-152-23	A	22.50 [0.886]	24.50 [0.965]	32.00 [1.260]	82.00 [3.230]	23.00 [0.906]	12.00 [0.472]	20.00 [0.787]	29.0 ±2.0 [1.142±0.079]	31.0 ±2.0 [1.220±0.079]
B-152-33	A	33.00 [1.300]	35.00 [1.378]	32.00 [1.260]	82.00 [3.230]	33.00 [1.300]	19.00 [0.748]	30.00 [1.181]	29.0 ±2.0 [1.142±0.079]	31.0 ±2.0 [1.220±0.079]


### MATERIALS

- INSULATION SLEEVE: Transparent heat-shrinkable radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Bi14 per ANSI/J-STD-006.  
FLUX: TYPE ROM1 per ANSI/J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic. Size 3 to 13: color blue. Size 17 to 33: natural.

### APPLICATION

- These controlled soldering devices are designed for termination of a bare or tin plated copper shield on a cable having an insulation rated for at least +85°C, meeting the dimensional criteria listed in the table above.
- Temperature range: -55°C to +125°C.
- When installed properly, it will meet the requirements of Tyco Electronics / Raychem Specification RT-1404.
- For installation procedure and application equipment consult Tyco Electronics / Raychem document RCPS-B152.

For best results, prepare the cable as shown:

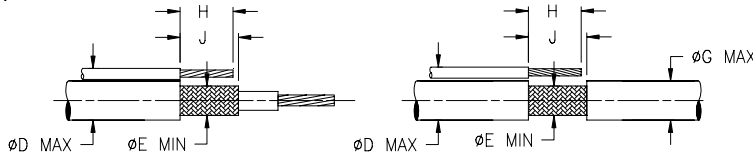

<b>tyco</b> Electronics		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<b>Raychem</b>		TITLE: <b>SOLDERSLEEVE SHIELD TERMINATOR</b>			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: <b>B-152-XX</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				DOC. ISSUE: 1		DATE: 11-Mar-04	
	ROUGHNESS IN MICRON					PROD. REV.: SEE TABLE		SCALE: None	
DRAWN BY: M. FORONDA	CAGE CODE: 06090	REPLACES: D981765	DCR NUMBER: D040053						

If this document is printed it becomes uncontrolled. Check for the latest revision.