



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Description


The PowerStor Aerogel Capacitor is a unique, ultra-high capacitance device based on a novel type of carbon foam, known as carbon aerogel. Aerogel capacitors are similar to supercapacitors, ultracapacitors and electrochemical double layer capacitors (EDLCs) with the added benefit of low ESR (Equivalent Series Resistance).

### Features & Benefits

- High specific capacitance
- Very low ESR
- Low leakage currents
- Long cycle life
- Ultra low ESR also available (A Series)

### Applications

- Main power
- Hybrid battery packs
- Hold-up power
- Pulse power

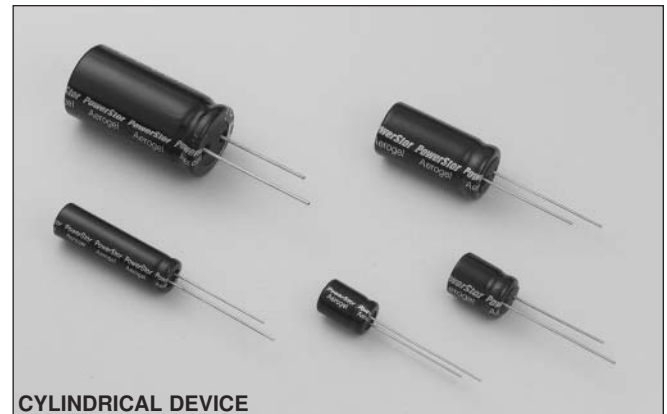

### SPECIFICATIONS

<b>Working Voltage</b>	2.5 volts
<b>Surge Voltage</b>	3.0 volts
<b>Nominal Capacitance Range</b>	0.22 to 50 F
<b>Capacitance Tolerance</b>	-20% to +80% (20°C)
<b>Operating Temperature Range</b>	-25°C to 70°C

### STANDARD PRODUCTS


Nominal Capacitance (F)	Part Number	Nominal ESR (Equivalent Series Resistance) Measured @ 1kHz (Ω)	Nominal Dimensions
0.22	B0510-2R5224	3	Ø = 5 mm; L = 11 mm
1.0	B0810-2R5105	0.400	Ø = 8 mm; L = 13 mm
1.5	B1010-2R5155	0.300	Ø = 10 mm; L = 12.5 mm
2.2	B0820-2R5225	0.200	Ø = 8 mm; L = 20 mm
3.3	B1020-2R5335	0.150	Ø = 10 mm; L = 20.5 mm
4.7	B0830-2R5475	0.150	Ø = 8 mm; L = 30 mm
6.8	B1030-2R5685	0.100	Ø = 10 mm; L = 30 mm
10	B1325-2R5106	0.060	Ø = 13 mm; L = 26 mm
22	B1635-2R5226	0.040	Ø = 16 mm; L = 35 mm
33	B1835-2R5336	0.030	Ø = 18 mm; L = 35 mm
50	B1840-2R5506	0.025	Ø = 18 mm; L = 40 mm

### PERFORMANCE

Parameter	Capacitance Change (% of initial measured value)	ESR (% of initial specified value)
Life (1000 hrs @ 70°C @ 2.5 volts DC)	≤ 30	≤ 300
Storage - low and high temperature (1000 hrs @ -25°C and 70°C)	≤ 30	≤ 300

DIMENSIONS (mm)								
Part Number	D	D'	L	L'	F	d'	C	C'
B0510-2R5224	5.0	5.5	11.5	12.0	2.0	0.50	20.0	5.0
B0810-2R5105	8.0	8.5	13.0	13.5	3.5	0.50	20.0	5.0
B1010-2R5155	10.0	10.5	13.9	14.4	5.0	0.60	20.0	5.0
B0820-2R5225	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
B1020-2R5335	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
B0830-2R5475	8.0	8.5	30.5	31.0	3.5	0.50	20.0	5.0
B1030-2R5685	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
B1325-2R5106	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
B1635-2R5226	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
B1835-2R5336	18.0	18.5	37.5	38.0	7.5	0.80	20.0	5.0
B1840-2R5506	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
					Maximum	± 0.5	± 0.02	Minimum

Note: Longer lead is positive

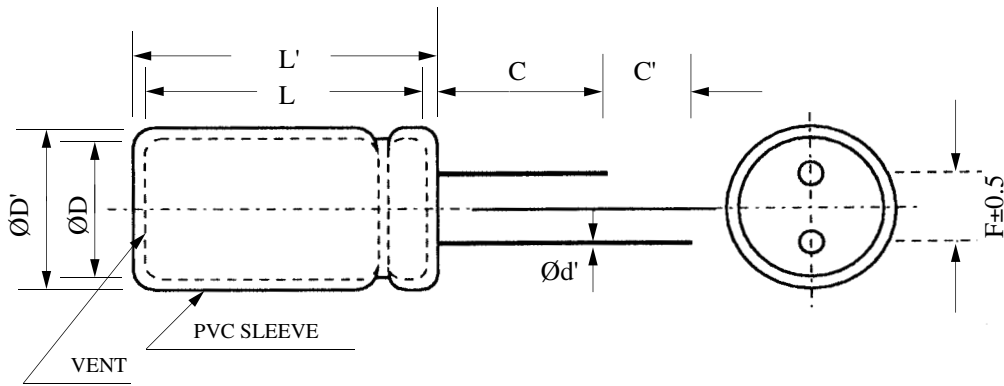

PART NUMBERING SYSTEM											
<b>B</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-	<b>2</b>	<b>R</b>	<b>5</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series Code	Dimensions (mm)					Voltage (V) R is decimal		Capacitance			
B = High Capacitance	Diameter	Length				2R5 = 2.5V		Value	Multiplier		
								Example: 475 = 47 x 10 <sup>5</sup> $\mu$ F or 4.7 F			

**PACKAGING INFORMATION**

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

**PART MARKING**

- Manufacturer
- Capacitance (F)
- Max. Operating Voltage (V)
- Series Code (or part number)
- Polarity Marking