



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ADSL LINE TRANSFORMER

## For Use with STMicro's Dynamite Chipset



- Matched to STMicro's Dynamite MTK-20140, MTK-20150, MTK-20450, MTB-20170, MTC20174 and MTC20166 CO/CPE chipsets.
- Designed to meet IEC950 supplementary insulation requirements for working voltages up to 250Vrms
- Industry standard surface mount footprint

### Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C



RoHS-5 Compliant Part No.	RoHS-6 Compliant Part No.	Turns Ratio Ratio (Line:Chip)	OCL Primary (µH ±6%)	Leakage Inductance (µH MAX)	DCR Primary (1-4 & 2-5) (Ω MAX)	DCR Secondary (10-7 & 9-6) (Ω MAX)	Isolation Voltage (Vrms)	THD @ 30kHz, 1.58 Vp-p (dB MIN)
B2232	B2232NL	2 : 1	409.5	6.5	0.66	0.20	1500	-78

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: B2232T and B2232NLT).

### Mechanical

### Schematic

#### B2232 / B2232NL

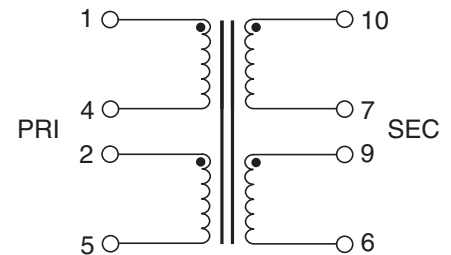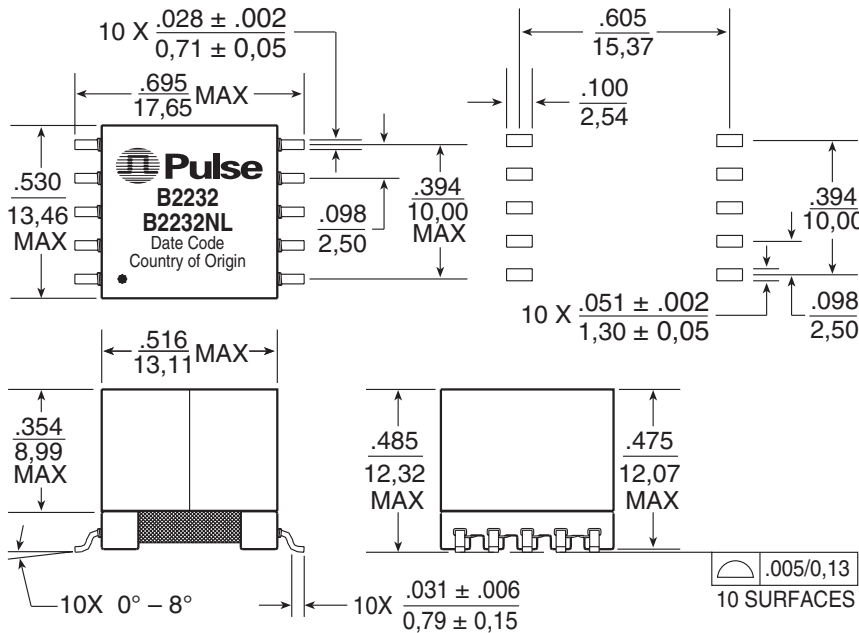

Weight . . . . . 6.2 grams  
 Tape and Reel . . . . . 150/reel  
 Tray . . . . . 60/tray  
 Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
 Unless otherwise specified,  
 all tolerances are  $\pm \frac{.010}{0,25}$

### For More Information:

#### Pulse Worldwide Headquarters

12220 World Trade Dr.  
 San Diego, CA 92128  
 U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

TEL: 858 674 8100  
 FAX: 858 674 8262

#### Pulse Europe

Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

Tel: 49 7032 7806 116  
 Fax: 49 7032 7806 135

#### Pulse China Headquarters

No. 1  
 Industrial District  
 Changan, Dongguan  
 China

Tel: 86 769 85538070  
 Fax: 86 769 85538870

#### Pulse North China

Room 1503  
 XinYin Building  
 No. 888 YiShan Rd.  
 Shanghai 200233  
 China

Tel: 86 21 54643211/2  
 Fax: 86 21 54643210

#### Pulse South Asia

150 Kampong Ampat  
 #07-01/02  
 KA Centre  
 Singapore 368324

Tel: 65 6287 8998  
 Fax: 65 6280 0080

#### Pulse North Asia

No. 26  
 Kao Ching Rd.  
 Yang Mei Chen  
 Taoyuan Hsien  
 Taiwan, R. O. C.

Tel: 886 3 4641811  
 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)

B820.C (6/06)