



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# Film Capacitors

## Metallized Polypropylene Film Capacitors (MKP)

**Series/Type:** B32671L ... B32672L

**Date:** March 2017

© EPCOS AG 2017. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

### Typical applications

- Electronic ballasts (resonant circuits)
- SMPS
- High-frequency AC loads
- Pulse circuits

### Climatic

- Max. operating temperature: 125 °C
- Climatic category (IEC 60068-1): 55/110/56

### Construction

- Dielectric: metallized polypropylene (PP)
- Wound capacitor technology
- Plastic case (UL 94 V-0)
- Epoxy resin sealing

### Features

- Very high AC voltages for all frequency ranges
- Very small dimensions
- High peak voltage for short time periods
- High peak current
- High pulse withstand capability
- RoHS-compatible
- Halogen-free capacitors available on request

### Terminals

- Parallel wire leads, lead-free tinned
- Special lead lengths available on request

### Marking


- Manufacturer's logo
- lot number, series number
- Rated capacitance (coded)
- Capacitance tolerance (code letter)
- Rated voltage
- Date of manufacture (coded)

### Delivery mode

- Bulk (untaped)
- Taped (Ammo pack or reel)


For notes on taping, refer to chapter "Taping and packing".

### Dimensional drawing

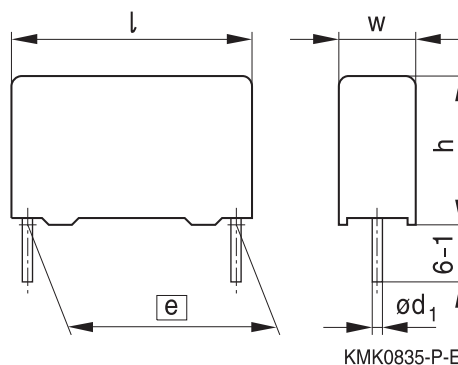


Dimensions in mm

Lead spacing	Lead diameter	Type
$e \pm 0.4$	$d_1 \pm 0.05$	
10	0.6	B32671L
15	0.8	B32672L



Overview of available types

Lead spacing	10 mm						15 mm								
Type	B32671L						B32672L								
Page	4						6								
V <sub>RMS</sub> (V AC)	200	250	250	500	600	700	160	200	250	250	500	600	700	900	
V <sub>R</sub> (V DC)	400	630	1000	1000	1600	2000	250	450	630	1000	1300	1600	2000	2000	
C <sub>R</sub> (nF)															
1.0															
1.2															
1.5															
2.2															
2.7															
3.3															
3.9															
4.7															
5.6															
6.2															
6.8															
8.2															
10															
12															
15															
22															
33															
47															
56															
68															
100															
150															
220															
330															
390															
470															
680															
1000															


**B32671L**
**High V AC, high temperature (wound)**
**Ordering codes and packing units (lead spacing 10 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack pcs./MOQ	Straight terminals, Reel pcs./MOQ	Straight terminals, Untaped pcs./MOQ
V AC	V DC	nF	mm				
200	400	22	4.0 × 9.0 × 13.0	B32671L4223+***	4000	6800	4000
		33	4.0 × 9.0 × 13.0	B32671L4333+***	4000	6800	4000
		47	5.0 × 11.0 × 13.0	B32671L4473+***	3320	5200	4000
		68	5.0 × 11.0 × 13.0	B32671L4683+***	3320	5200	4000
		100	6.0 × 12.0 × 13.0	B32671L4104+***	2720	4400	4000
250	630	15	4.0 × 9.0 × 13.0	B32671L6153+***	4000	6800	4000
		22	5.0 × 11.0 × 13.0	B32671L6223+***	3320	5200	4000
		33	5.0 × 11.0 × 13.0	B32671L6333+***	3320	5200	4000
		47	6.0 × 12.0 × 13.0	B32671L6473+***	2720	4400	4000
		56	6.0 × 12.0 × 13.0	B32671L6563+***	2720	4400	4000
250	1000	4.7	4.0 × 9.0 × 13.0	B32671L9472+***	4000	6800	4000
		6.8	4.0 × 9.0 × 13.0	B32671L9682+***	4000	6800	4000
		10	5.0 × 11.0 × 13.0	B32671L9103+***	3320	5200	4000
		15	5.0 × 11.0 × 13.0	B32671L9153+***	3320	5200	4000
		22	6.0 × 12.0 × 13.0	B32671L9223+***	2720	4400	4000
500	1000	3.3	4.0 × 9.0 × 13.0	B32671L0332+***	4000	6800	4000
		3.9	4.0 × 9.0 × 13.0	B32671L0392+***	4000	6800	4000
		4.7	4.0 × 9.0 × 13.0	B32671L0472+***	4000	6800	4000
		5.6	5.0 × 11.0 × 13.0	B32671L0562+***	3320	5200	4000
		6.2	5.0 × 11.0 × 13.0	B32671L0622+***	3320	5200	4000
		6.8	5.0 × 11.0 × 13.0	B32671L0682+***	3320	5200	4000
		8.2	6.0 × 12.0 × 13.0	B32671L0822+***	2720	4400	4000
		10	6.0 × 12.0 × 13.0	B32671L0103+***	2720	4400	4000
12	6.0 × 12.0 × 13.0	B32671L0123+***	2720	4400	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack


189 = Straight terminals, Reel

240 = Crimped down to lead spacing 7.5 mm,  
Ammo pack

140 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)


**Ordering codes and packing units (lead spacing 10 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack pcs./MOQ	Straight terminals, Reel pcs./MOQ	Straight terminals, Untaped pcs./MOQ
V AC	V DC	nF	mm				
600	1600	1.2	4.0 × 9.0 × 13.0	B32671L1122+***	4000	6800	4000
		1.5	4.0 × 9.0 × 13.0	B32671L1152+***	4000	6800	4000
		2.2	5.0 × 11.0 × 13.0	B32671L1222+***	3320	5200	4000
		2.7	5.0 × 11.0 × 13.0	B32671L1272+***	3320	5200	4000
		3.3	6.0 × 12.0 × 13.0	B32671L1332+***	2720	4400	4000
		3.9	6.0 × 12.0 × 13.0	B32671L1392+***	2720	4400	4000
		4.7	6.0 × 12.0 × 13.0	B32671L1472+***	2720	4400	4000
700	2000	1.0	4.0 × 9.0 × 13.0	B32671L8102+***	4000	6800	4000
		1.2	4.0 × 9.0 × 13.0	B32671L8122+***	4000	6800	4000
		1.5	4.0 × 9.0 × 13.0	B32671L8152+***	4000	6800	4000
		2.2	5.0 × 11.0 × 13.0	B32671L8222+***	3320	5200	4000
		2.7	5.0 × 11.0 × 13.0	B32671L8272+***	3320	5200	4000
		3.3	5.0 × 11.0 × 13.0	B32671L8332+***	3320	5200	4000
		3.9	6.0 × 12.0 × 13.0	B32671L8392+***	2720	4400	4000
4.7	6.0 × 12.0 × 13.0	B32671L8472+***	2720	4400	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack


189 = Straight terminals, Reel

240 = Crimped down to lead spacing 7.5 mm,  
Ammo pack

140 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)


**B32672L**
**High V AC, high temperature (wound)**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack pcs./MOQ	Straight terminals, Reel pcs./ MOQ	Straight terminals, Untaped pcs./ MOQ
V AC	V DC	nF	mm				
160	250	150	5.0 × 10.5 × 18.0	B32672L2154+***	4680	5200	4000
		220	6.0 × 11.0 × 18.0	B32672L2224+***	3840	4400	4000
		330	7.0 × 12.5 × 18.0	B32672L2334+***	3320	3600	4000
		470	8.5 × 14.5 × 18.0	B32672L2474+***	2720	2800	2000
		680	9.0 × 17.5 × 18.0	B32672L2684+***	2560	2800	2000
		1000	11.0 × 18.5 × 18.0	B32672L2105+***	—	2200	1200
200	450	68	5.0 × 10.5 × 18.0	B32672L4683+***	4680	5200	4000
		100	5.0 × 10.5 × 18.0	B32672L4104+***	4680	5200	4000
		150	6.0 × 11.0 × 18.0	B32672L4154+***	3840	4400	4000
		220	7.0 × 12.5 × 18.0	B32672L4224+***	3320	3600	4000
		330	8.0 × 14.0 × 18.0	B32672L4334+***	2920	3000	2000
		470	9.0 × 17.5 × 18.0	B32672L4474+***	2560	2800	2000
250	630	680	11.0 × 18.5 × 18.0	B32672L4684+***	—	2200	1200
		33	5.0 × 10.5 × 18.0	B32672L6333+***	4680	5200	4000
		47	5.0 × 10.5 × 18.0	B32672L6473+***	4680	5200	4000
		68	6.0 × 11.0 × 18.0	B32672L6683+***	3840	4400	4000
		100	7.0 × 12.5 × 18.0	B32672L6104+***	3320	3600	4000
		150	8.5 × 14.5 × 18.0	B32672L6154+***	2720	2800	2000
		220	9.0 × 17.5 × 18.0	B32672L6224+***	2560	2800	2000
		390	11.0 × 18.5 × 18.0	B32672L6394+***	—	2200	1200

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack


189 = Straight terminals, Reel

255 = Crimped down to lead spacing 7.5 mm,  
Ammo pack

155 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)


**Ordering codes and packing units (lead spacing 15 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack pcs./MOQ	Straight terminals, Reel pcs./ MOQ	Straight terminals, Untaped pcs./ MOQ
V AC	V DC	nF	mm				
250	1000	10	5.0 × 10.5 × 18.0	B32672L0103+***	4680	5200	4000
		15	5.0 × 10.5 × 18.0	B32672L0153+***	4680	5200	4000
		22	5.0 × 10.5 × 18.0	B32672L0223+***	4680	5200	4000
		33	6.0 × 11.0 × 18.0	B32672L0333+***	3840	4400	4000
		47	7.0 × 12.5 × 18.0	B32672L0473+***	3320	3600	4000
		68	8.5 × 14.5 × 18.0	B32672L0683+***	2720	2800	2000
		100	9.0 × 17.5 × 18.0	B32672L0104+***	2560	2800	2000
500	1300	150	11.0 × 18.5 × 18.0	B32672L0154+***	—	2200	1200
		6.8	5.0 × 10.5 × 18.0	B32672L7682+***	4680	5200	4000
		10	5.0 × 10.5 × 18.0	B32672L7103+***	4680	5200	4000
		22	7.0 × 12.5 × 18.0	B32672L7223+***	3320	3600	4000
		33	8.5 × 14.5 × 18.0	B32672L7333+***	2720	2800	2000
		47	9.0 × 17.5 × 18.0	B32672L7473+***	2560	2800	2000
600	1600	68	11.0 × 18.5 × 18.0	B32672L7683+***	—	2200	1200
		6.2	5.0 × 10.5 × 18.0	B32672L1622+***	4680	5200	4000
		6.8	5.0 × 10.5 × 18.0	B32672L1682+***	4680	5200	4000
		8.2	6.0 × 11.0 × 18.0	B32672L1822+***	3840	4400	4000
		10	6.0 × 11.0 × 18.0	B32672L1103+***	3840	4400	4000
		12	6.0 × 12.0 × 18.0	B32672L1123+***	3840	4400	4000
		15	7.0 × 12.5 × 18.0	B32672L1153+***	3320	3600	4000
		22	8.5 × 14.5 × 18.0	B32672L1223+***	2720	2800	2000
		33	9.0 × 17.5 × 18.0	B32672L1333+***	2560	2800	2000
		47	11.0 × 18.5 × 18.0	B32672L1473+***	—	2200	1200

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel


255 = Crimped down to lead spacing 7.5 mm,  
Ammo pack

155 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)




**B32672L**
**High V AC, high temperature (wound)**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack	Straight terminals, Reel	Straight terminals, Untaped
V AC	V DC	nF	mm		pcs./MOQ	pcs./MOQ	pcs./MOQ
700	2000	1.0	5.0 × 10.5 × 18.0	B32672L8102+***	4680	5200	4000
		1.2	5.0 × 10.5 × 18.0	B32672L8122+***	4680	5200	4000
		1.5	5.0 × 10.5 × 18.0	B32672L8152+***	4680	5200	4000
		2.2	5.0 × 10.5 × 18.0	B32672L8222+***	4680	5200	4000
		2.7	5.0 × 10.5 × 18.0	B32672L8272+***	4680	5200	4000
		3.3	5.0 × 10.5 × 18.0	B32672L8332+***	4680	5200	4000
		3.9	5.0 × 10.5 × 18.0	B32672L8392+***	4680	5200	4000
		4.7	5.0 × 10.5 × 18.0	B32672L8472+***	4680	5200	4000
		5.6	6.0 × 11.0 × 18.0	B32672L8562+***	3840	4400	4000
		6.2	6.0 × 11.0 × 18.0	B32672L8622+***	3840	4400	4000
		6.8	6.0 × 11.0 × 18.0	B32672L8682+***	3840	4400	4000
		8.2	6.0 × 12.0 × 18.0	B32672L8822+***	3840	4400	4000
		10	7.0 × 12.5 × 18.0	B32672L8103+***	3320	3600	4000
		12	8.5 × 14.5 × 18.0	B32672L8123+***	2720	2800	2000
		15	8.5 × 14.5 × 18.0	B32672L8153+***	2720	2800	2000
		22	9.0 × 17.5 × 18.0	B32672L8223+***	2560	2800	2000
33	11.0 × 18.5 × 18.0	B32672L8333+***	—	2200	1200		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel

255 = Crimped down to lead spacing 7.5 mm,  
Ammo pack


155 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)

B32672L

High V AC, high temperature (wound)



**Ordering codes and packing units (lead spacing 15 mm)**

$V_{RMS}$ $f \leq 1$ kHz	$V_R$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Straight terminals, Ammo pack pcs./MOQ	Straight terminals, Reel pcs./ MOQ	Straight terminals, Untaped pcs./ MOQ
V AC	V DC	nF	mm				
900	2000	1.0	5.0 × 10.5 × 18.0	B32672L9102+***	4680	5200	4000
		1.2	6.0 × 11.0 × 18.0	B32672L9122+***	3840	4400	4000
		1.5	6.0 × 11.0 × 18.0	B32672L9152+***	3840	4400	4000
		2.2	7.0 × 12.5 × 18.0	B32672L9222+***	3320	3600	4000
		2.7	8.0 × 14.0 × 18.0	B32672L9272+***	2920	3000	2000
		3.3	8.5 × 14.5 × 18.0	B32672L9332+***	2720	2800	2000
		3.9	9.0 × 17.5 × 18.0	B32672L9392+***	2560	2800	2000
		4.7	9.0 × 17.5 × 18.0	B32672L9472+***	2560	2800	2000
		5.6	11.0 × 18.5 × 18.0	B32672L9562+***	—	2200	1200
		6.2	11.0 × 18.5 × 18.0	B32672L9622+***	—	2200	1200
		6.8	11.0 × 18.5 × 18.0	B32672L9682K***	—	2200	1200

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series, intermediate capacitance values and closer tolerances on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack


189 = Straight terminals, Reel

255 = Crimped down to lead spacing 7.5 mm,  
Ammo pack

155 = Crimped down to lead spacing 7.5 mm,  
Reel

003 = Straight terminals, untaped (lead length  
3.2 ± 0.3 mm)

000 = Straight terminals, untaped (lead length  
6–1 mm)




**B32671L ... B32672L**

**High V AC, high temperature (wound)**

### Technical data

Reference standard: IEC 60384-16. All data given at T = 20 °C, otherwise is specified.

Operating temperature range	Max. operating temperature $T_{op,max}$	+125 °C			
	Upper category temperature $T_{max}$	+110 °C			
	Lower category temperature $T_{min}$	-55 °C			
	Rated temperature $T_R$	+85 °C			
Dissipation factor $\tan \delta$ (in $10^{-3}$ ) at 20 °C (upper limit values)	at	$\leq 27$ nF	$27$ nF < $C_R \leq 0.1$ $\mu$ F	$0.1$ $\mu$ F < $C_R \leq 1$ $\mu$ F	>1 $\mu$ F
	1 kHz	0.8	0.8	0.8	0.8
	10 kHz	1.0	1.0	1.0	—
	100 kHz	2.0	3.0	—	—
Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$ at 20 °C, rel. humidity $\leq 65\%$ (minimum as-delivered values)	100 G $\Omega$ ( $C_R \leq 0.33$ $\mu$ F)				
	30000 s ( $C_R > 0.33$ $\mu$ F)				
DC test voltage	$1.6 \cdot V_R$ , 2 s				
Category voltage $V_C$ (continuous operation with $V_{DC}$ or $V_{AC}$ at $f \leq 1$ kHz)	$T_{op}$ (°C)	DC voltage derating		AC voltage derating	
	$T_{op} \leq 85$ $85 < T_{op} \leq 110$	$V_C = V_R$ $V_C = V_R \cdot (165 - T_{op})/80$		$V_{C,RMS} = V_{RMS}$ $V_{C,RMS} = V_{RMS} \cdot (165 - T_{op})/80$	
Operating voltage $V_{op}$ for short operating periods ( $V_{DC}$ or $V_{AC}$ at $f \leq 1$ kHz)	$T_{op}$ (°C)	DC voltage (max. hours)		AC voltage (max. hours)	
	$T_{op} \leq 100$ $100 < T_{op} \leq 125$	$V_{op} = 1.25 \cdot V_C$ (2000 h) $V_{op} = 1.25 \cdot V_C$ (1000 h)		$V_{op} = 1.0 \cdot V_{C,RMS}$ (2000 h) $V_{op} = 1.0 \cdot V_{C,RMS}$ (1000 h)	
Reliability: Failure rate $\lambda$ Service life $t_{SL}$	1 fit ( $\leq 1 \cdot 10^{-9}/h$ ) at $0.5 \cdot V_R$ , 40 °C 200 000 h at $1.0 \cdot V_R$ , 85 °C For conversion to other operating conditions and temperatures, refer to chapter "Quality, 2 Reliability".				
Failure criteria: Total failure Failure due to variation of parameters	Short circuit or open circuit				
	Capacitance change $ \Delta C/C $	> 10%			
	Dissipation factor $\tan \delta$	> 4 · upper limit values			
	Insulation resistance $R_{ins}$	< 1500 M $\Omega$			



### Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/μs.


"k<sub>0</sub>" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in V<sup>2</sup>/μs.

*Note:*


*The values of dV/dt and k<sub>0</sub> provided below must not be exceeded in order to avoid damaging the capacitor. These parameters are given for isolated pulses in such a way that the heat generated by one pulse will be completely dissipated before applying the next pulse. For a train of pulses, please refer to the curves of permissible AC voltage-current versus frequency.*

### dV/dt values


Lead spacing	10 mm					
Type	B32671L					
V <sub>RMS</sub> (V AC)	200	250		500	600	700
V <sub>R</sub> (V DC)	400	630	1000	1000	1600	2000
C <sub>R</sub> (nF)	dV/dt in V/μs					
1.0	–	–	–	–	–	11000
1.2	–	–	–	–	6000	10000
1.5	–	–	–	–	5600	9500
2.2	–	–	–	–	5200	9000
2.7	–	–	–	–	5000	8600
3.3	–	–	–	4700	4700	8500
3.9	–	–	–	4300	4500	8200
4.7	–	–	810	3800	4000	8000
5.6	–	–	–	3400	–	–
6.2	–	–	–	3200	–	–
6.8	–	–	810	3100	–	–
8.2	–	–	–	2700	–	–
10	–	–	810	2500	–	–
12	–	–	–	2300	–	–
15	–	540	810	–	–	–
22	400	540	810	–	–	–
33	400	540	–	–	–	–
47	400	540	–	–	–	–
56	–	540	–	–	–	–
68	400	–	–	–	–	–
100	400	–	–	–	–	–


**B32671L ... B32672L**
**High V AC, high temperature (wound)**
**dV/dt values**


Lead spacing	15 mm							
Type	B32672L							
V <sub>RMS</sub> (V AC)	160	200	250		500	600	700	900
V <sub>R</sub> (V DC)	250	450	630	1000	1300	1600	2000	2000
C <sub>R</sub> (nF)	dV/dt in V/μs							
1.0	–	–	–	–	–	–	10000	15000
1.2	–	–	–	–	–	–	9400	14100
1.5	–	–	–	–	–	–	9000	13500
2.2	–	–	–	–	–	–	7500	11000
2.7	–	–	–	–	–	–	7100	10600
3.3	–	–	–	–	–	–	6800	10000
3.9	–	–	–	–	–	–	6000	9000
4.7	–	–	–	–	–	–	5500	8200
5.6	–	–	–	–	–	–	5000	7500
6.2	–	–	–	–	–	3600	4700	7000
6.8	–	–	–	–	1000	3500	4500	6700
8.2	–	–	–	–	–	3100	4200	–
10	–	–	–	445	1000	2800	3900	–
12	–	–	–	–	–	2600	3600	–
15	–	–	–	445	–	2300	3300	–
22	–	–	–	445	1000	2000	2900	–
33	–	–	300	445	1000	1700	2300	–
47	–	–	300	445	1000	1400	–	–
56	–	–	–	–	–	–	–	–
68	–	200	300	445	1000	–	–	–
100	–	200	300	445	–	–	–	–
150	170	200	300	445	–	–	–	–
220	170	200	300	–	–	–	–	–
330	170	200	–	–	–	–	–	–
390	–	–	300	–	–	–	–	–
470	170	200	–	–	–	–	–	–
680	170	200	–	–	–	–	–	–
1000	170	–	–	–	–	–	–	–


 **$k_0$  values**

Lead spacing	10 mm					
Type	B32671L					
$V_{RMS}$ (V AC)	200	250		500	600	700
$V_R$ (V DC)	400	630	1000	1000	1600	2000
$C_R$ (nF)	$k_0$ in $V^2/\mu s$					
1.0	–	–	–	–	–	25000000
1.2	–	–	–	–	14400000	23000000
1.5	–	–	–	–	14000000	22500000
2.2	–	–	–	–	13800000	22000000
2.7	–	–	–	–	13600000	21500000
3.3	–	–	–	9400000	13300000	21000000
3.9	–	–	–	8600000	13100000	20900000
4.7	–	–	400000	8200000	12000000	20800000
5.6	–	–	–	7600000	–	–
6.2	–	–	–	6800000	–	–
6.8	–	–	400000	6200000	–	–
8.2	–	–	–	5400000	–	–
10	–	–	400000	5000000	–	–
12	–	–	–	4600000	–	–
15	–	200000	400000	–	–	–
22	150000	200000	400000	–	–	–
33	150000	200000	–	–	–	–
47	150000	200000	–	–	–	–
56	–	200000	–	–	–	–
68	150000	–	–	–	–	–
100	150000	–	–	–	–	–



**B32671L ... B32672L**
**High V AC, high temperature (wound)**
 **$k_0$  values**

Lead spacing	15 mm								
Type	B32672L								
$V_{RMS}$ (V AC)	160	200	250		500	600	700	900	
$V_R$ (V DC)	250	450	630	1000	1300	1600	2000	2000	
$C_R$ (nF)	$k_0$ in $V^2/\mu s$								
1.0	–	–	–	–	–	–	20300000	30000000	
1.2	–	–	–	–	–	–	19600000	29400000	
1.5	–	–	–	–	–	–	19200000	28000000	
2.2	–	–	–	–	–	–	18600000	27500000	
2.7	–	–	–	–	–	–	18200000	27300000	
3.3	–	–	–	–	–	–	18000000	27000000	
3.9	–	–	–	–	–	–	16800000	25200000	
4.7	–	–	–	–	–	–	15800000	23500000	
5.6	–	–	–	–	–	–	13100000	19500000	
6.2	–	–	–	–	–	11520000	12700000	19000000	
6.8	–	–	–	–	3000000	11200000	12300000	18400000	
8.2	–	–	–	–	–	9920000	11800000	–	
10	–	–	–	1000000	3000000	8960000	11100000	–	
12	–	–	–	–	–	8320000	10600000	–	
15	–	–	–	1000000	–	7360000	10400000	–	
22	–	–	–	1000000	3000000	6400000	9300000	–	
33	–	–	500000	1000000	3000000	5440000	9000000	–	
47	–	–	500000	1000000	3000000	4480000	–	–	
56	–	–	–	–	–	–	–	–	
68	–	120000	500000	1000000	3000000	–	–	–	
100	–	120000	500000	1000000	–	–	–	–	
150	100000	120000	500000	1000000	–	–	–	–	
220	100000	120000	500000	–	–	–	–	–	
330	100000	120000	–	–	–	–	–	–	
390	–	–	500000	–	–	–	–	–	
470	100000	120000	–	–	–	–	–	–	
680	100000	–	–	–	–	–	–	–	
1000	100000	–	–	–	–	–	–	–	




**B32671L ... B32672L**  
**High V AC, high temperature (wound)**

**Impedance Z versus frequency f (typical values)**

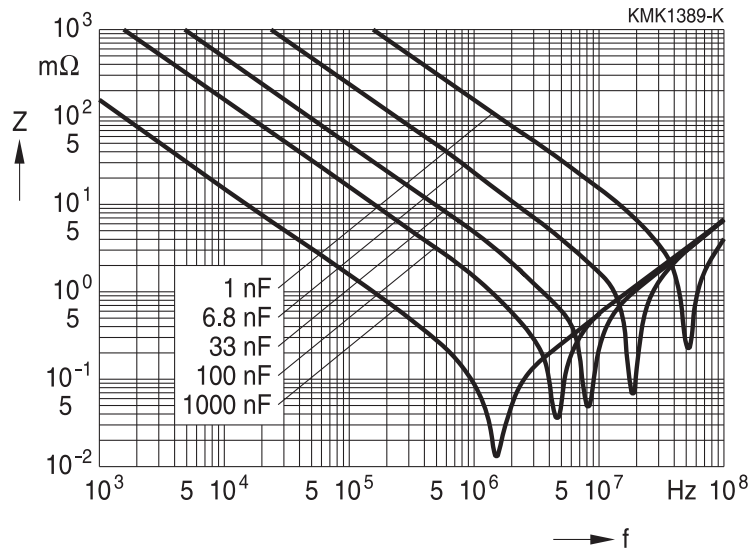





## B32671L


High V AC, high temperature (wound)

Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100\text{ }^\circ\text{C}$ )


For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .

Lead spacing 10 mm


400 V DC/200 V AC

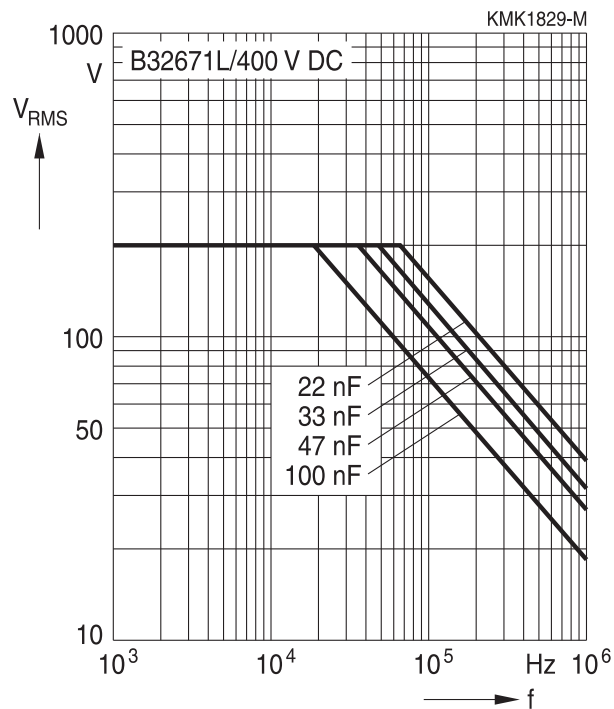


630 V DC/250 V AC

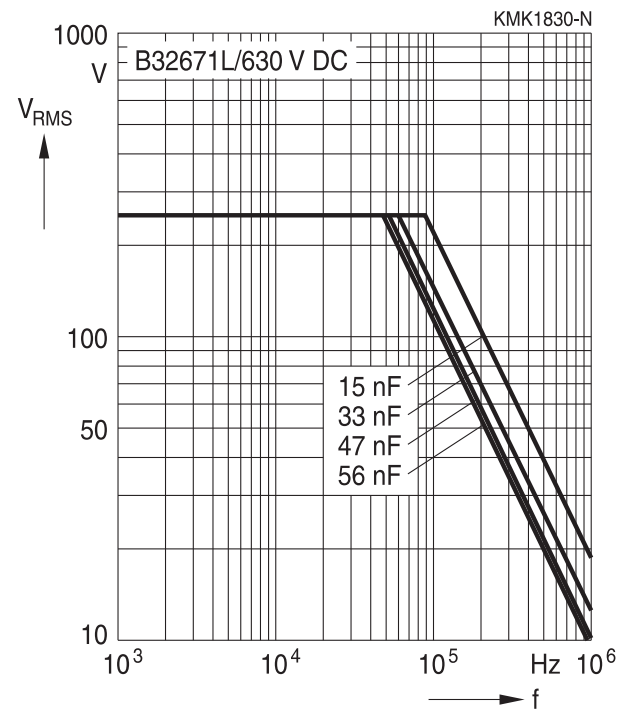

1000 V DC/250 V AC

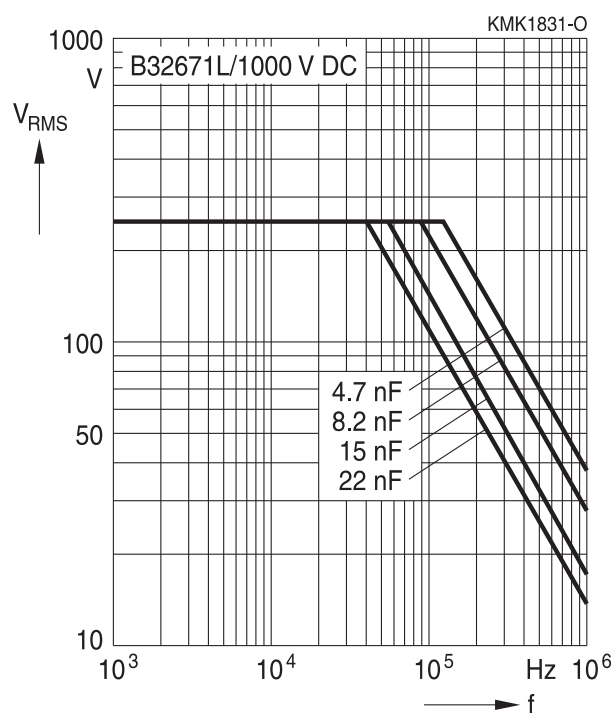


1000 V DC/500 V AC

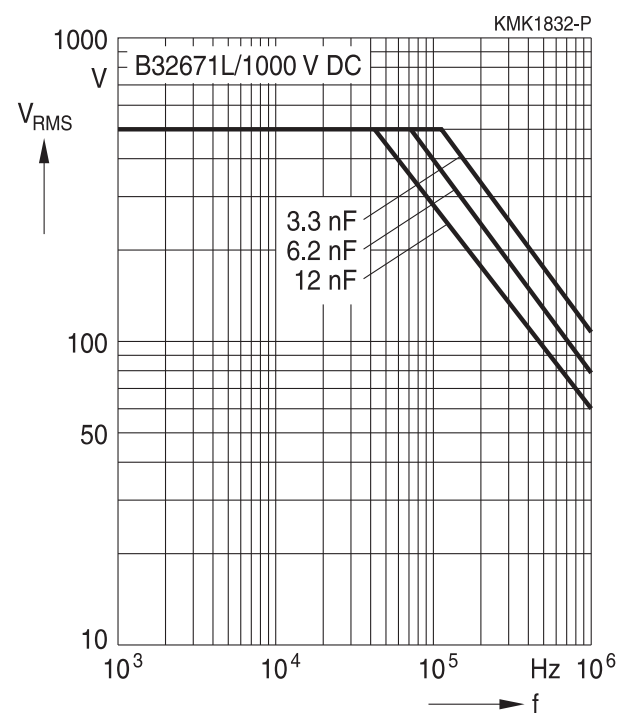

B32671L


High V AC, high temperature (wound)




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100\text{ }^\circ\text{C}$ )**  
 For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .


**Lead spacing 10 mm**

1600 V DC/600 V AC

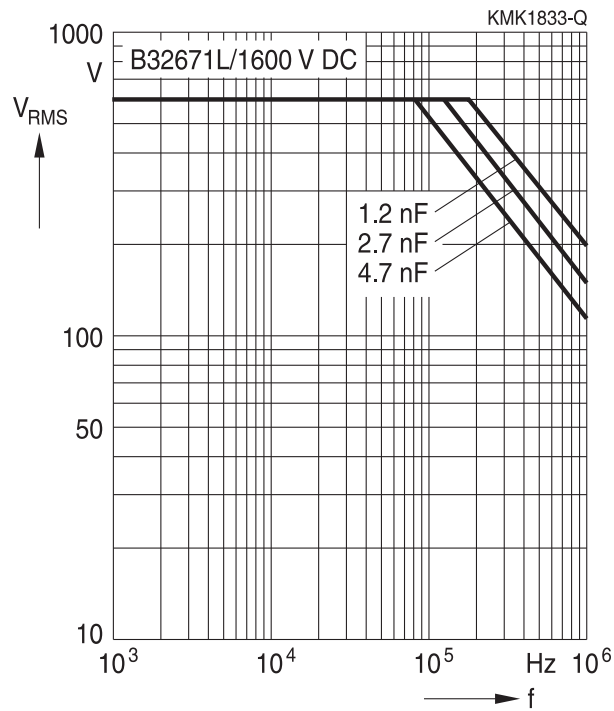

2000 V DC/700 V AC

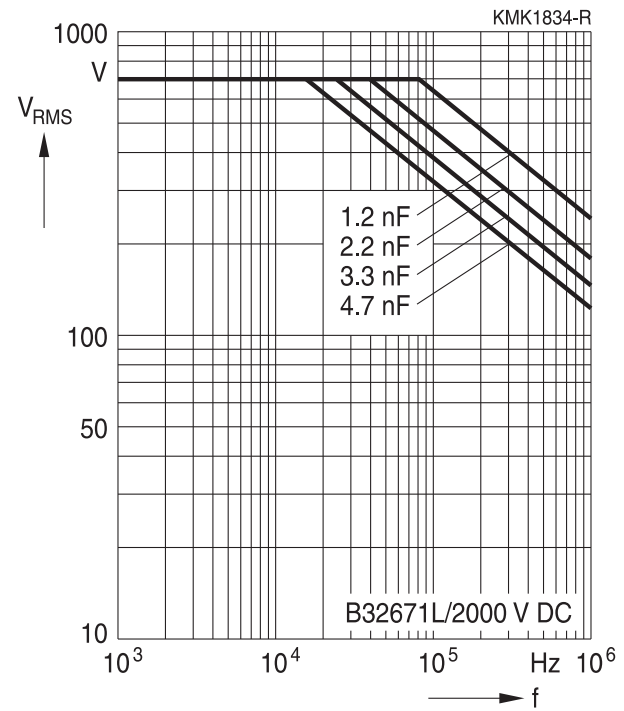



**B32672L**


**High V AC, high temperature (wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100^\circ C$ )**


For  $T_A > 100^\circ C$ , please use derating factor  $F_T$ .

**Lead spacing 15 mm**


**250 V DC/160 V AC**

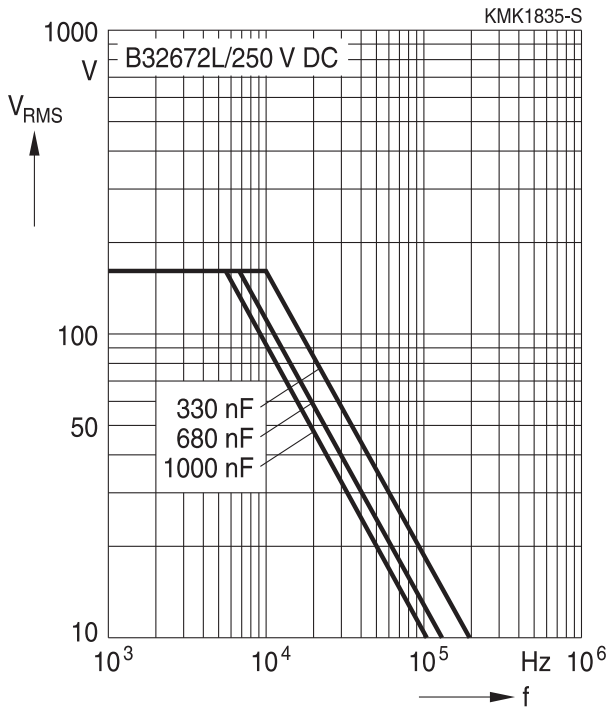


**450 V DC/200 V AC**

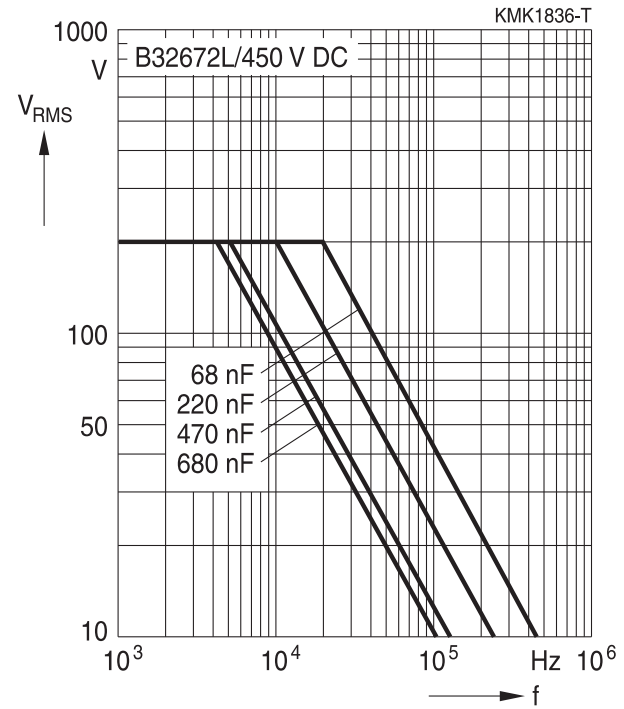

**630 V DC/250 V AC**

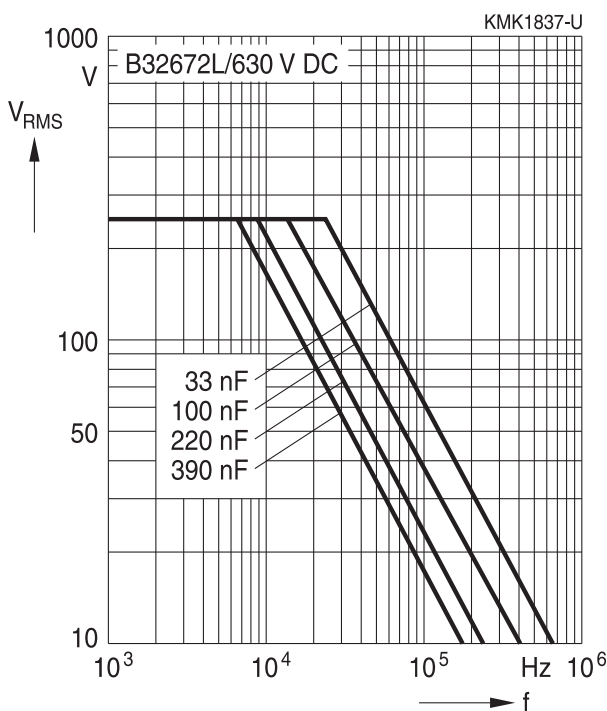


**1000 V DC/250 V AC**

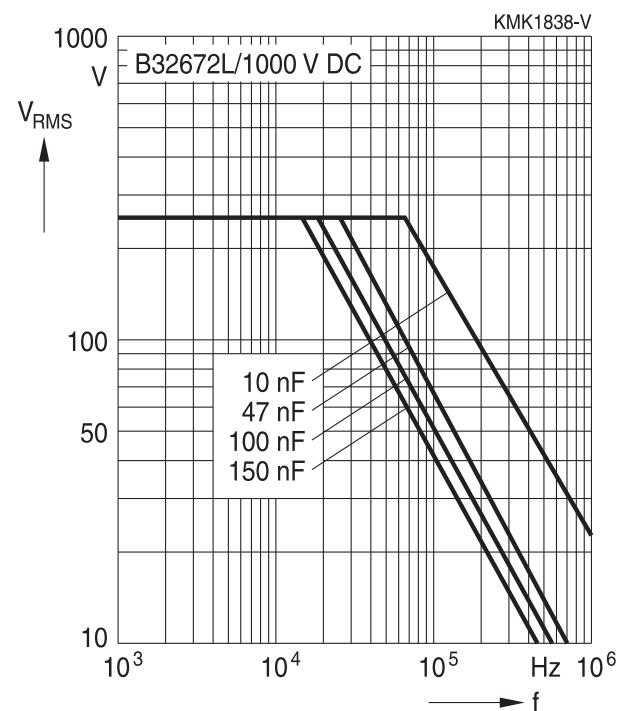

**B32672L**


**High V AC, high temperature (wound)**




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100^\circ\text{C}$ )**  
 For  $T_A > 100^\circ\text{C}$ , please use derating factor  $F_T$ .

**Lead spacing 15 mm**


**1300 V DC/500 V AC**

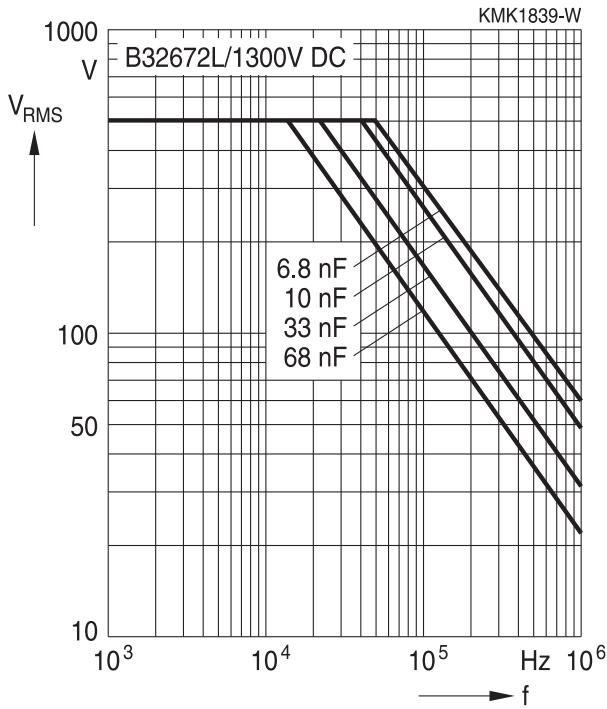


**1600 V DC/600 V AC**

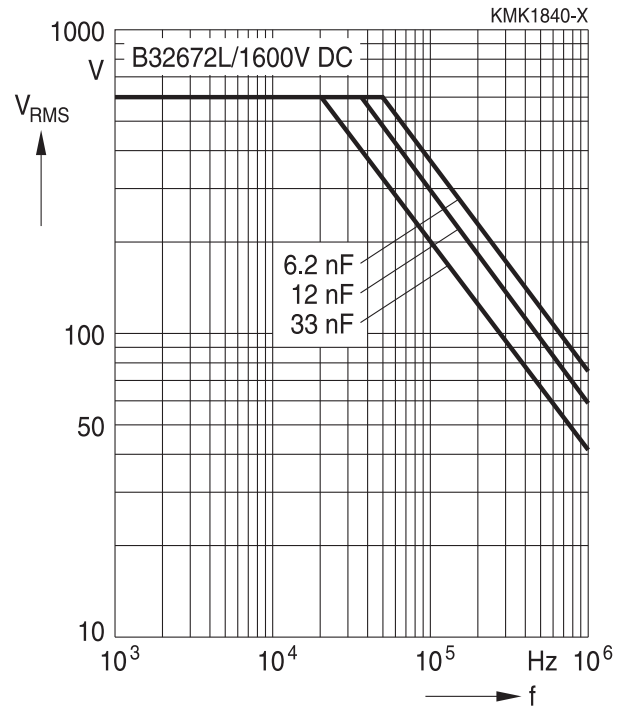


**2000 V DC/700 V AC**

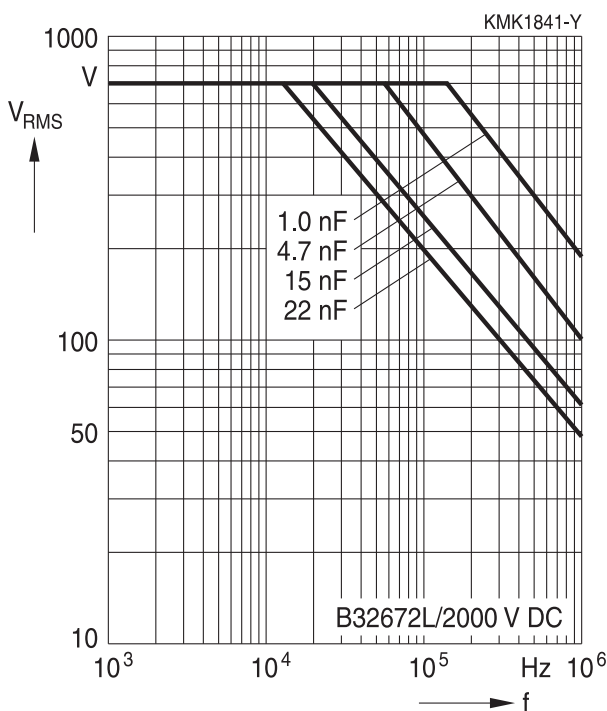

**2000 V DC/900 V AC**

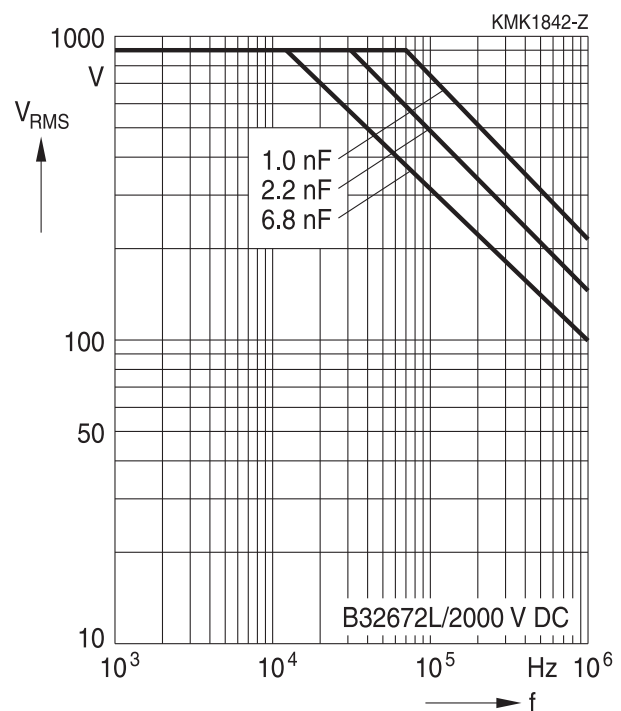



### B32671L


High V AC, high temperature (wound)

#### Permissible current $I_{RMS}$ versus frequency $f$ (for sinusoidal waveforms $T_A \leq 100\text{ }^\circ\text{C}$ )


For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .

#### Lead spacing 10 mm


##### 400 V DC/200 V AC

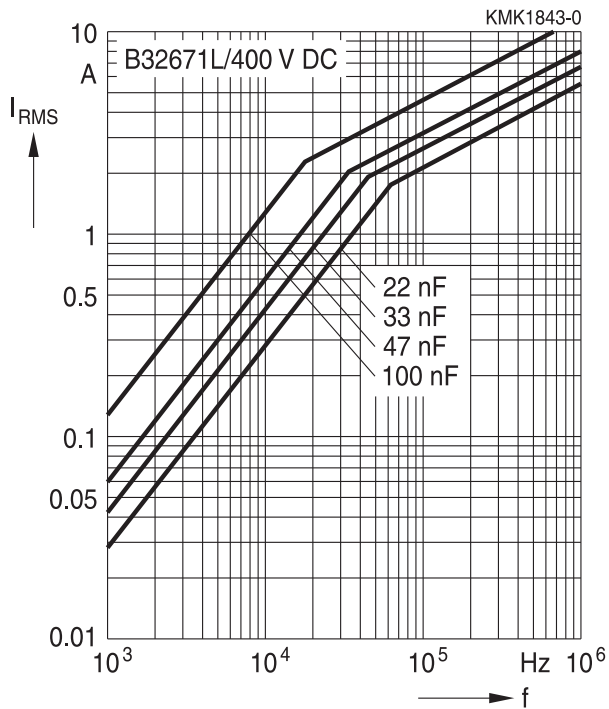


##### 630 V DC/250 V AC

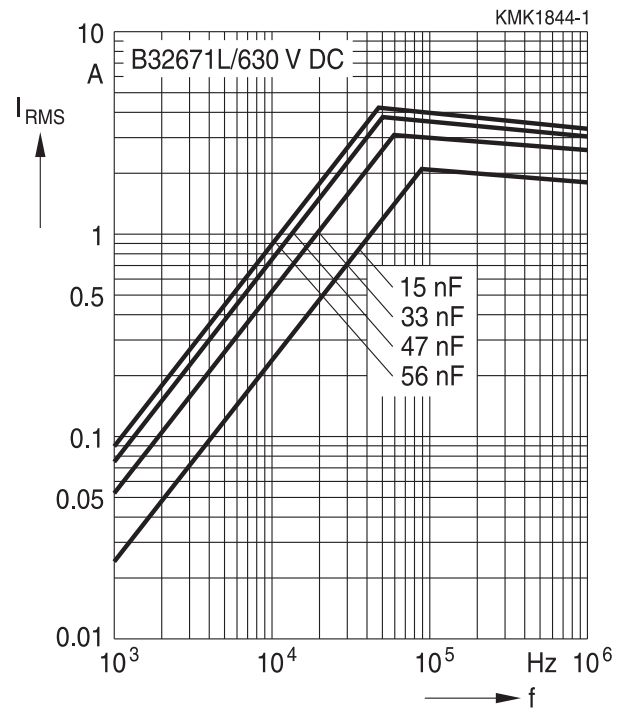

##### 1000 V DC/250 V AC

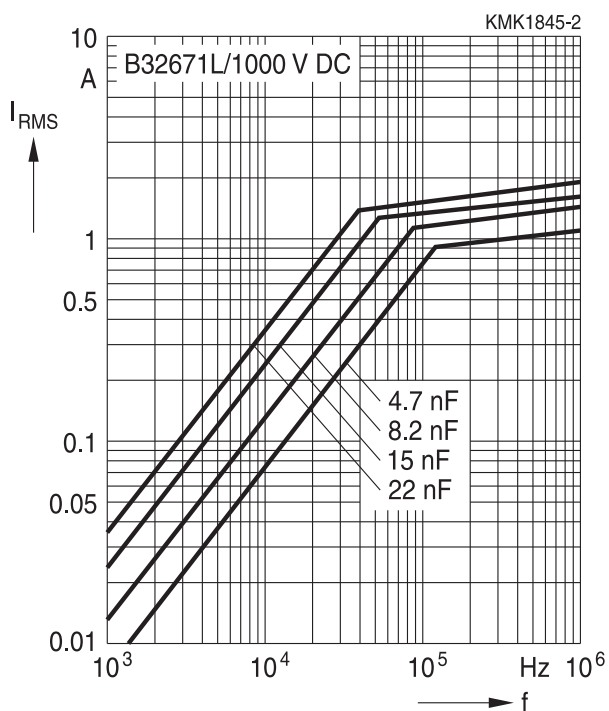


##### 1000 V DC/500 V AC

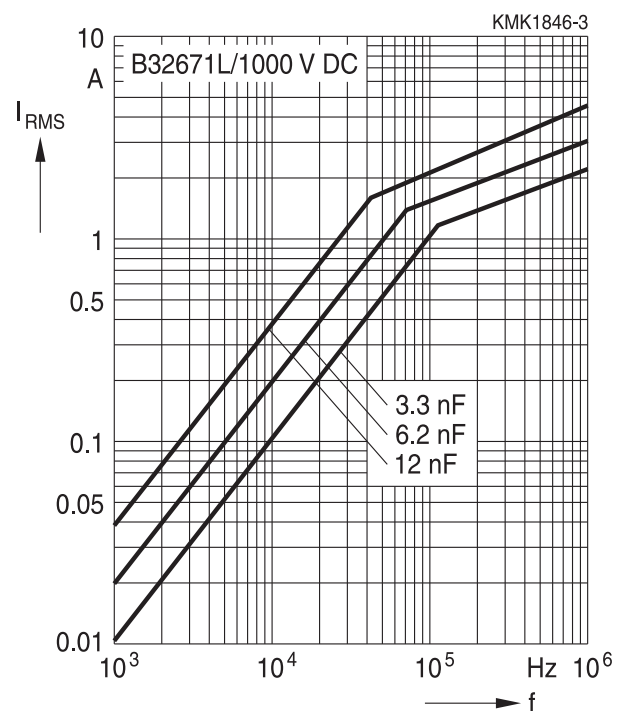

B32671L

High V AC, high temperature (wound)




**Permissible current  $I_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100\text{ }^\circ\text{C}$ )**


For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .


**Lead spacing 10 mm**

1600 V DC/600 V AC

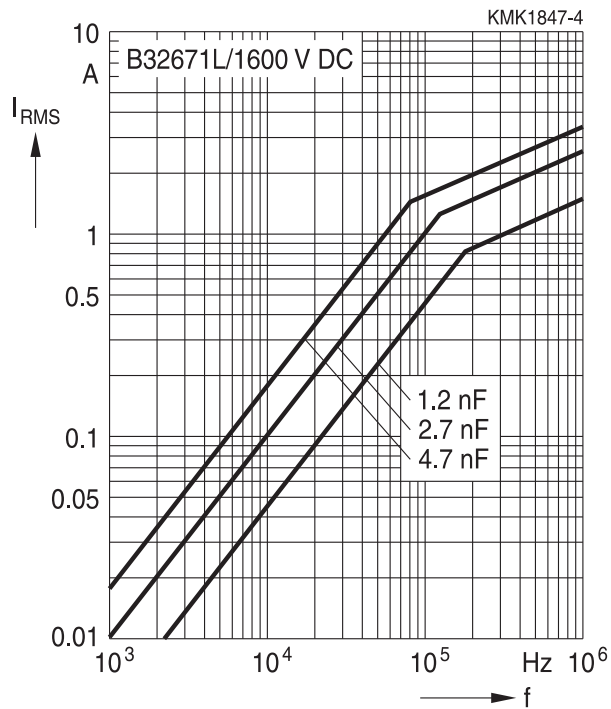

2000 V DC/700 V AC

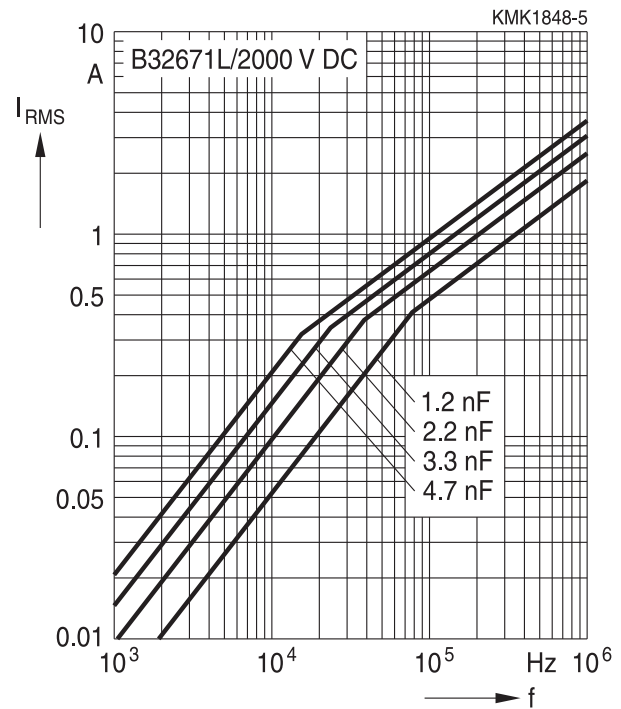



**B32672L**


**High V AC, high temperature (wound)**

**Permissible current  $I_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100\text{ }^\circ\text{C}$ )**


For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .

**Lead spacing 15 mm**


**250 V DC/160 V AC**

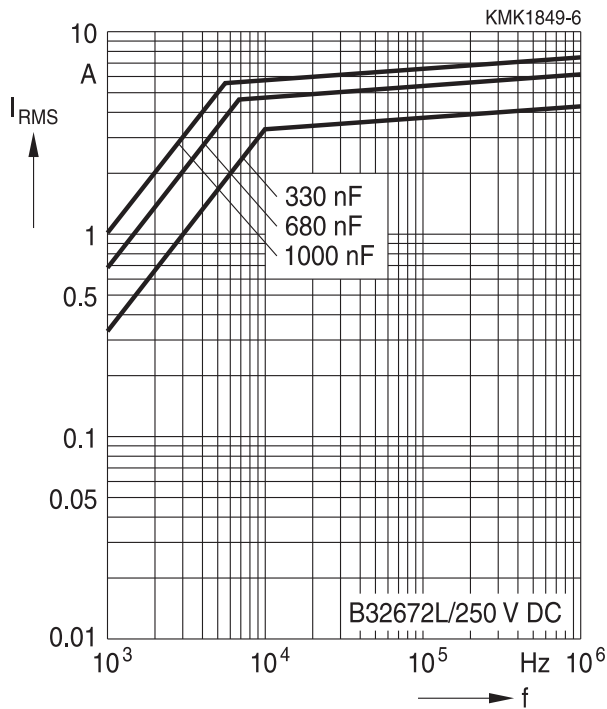


**450 V DC/200 V AC**

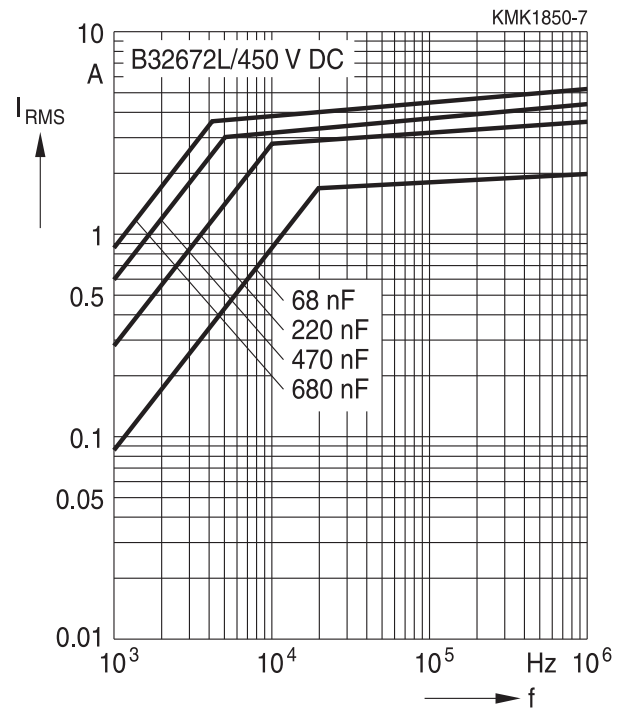

**630 V DC/250 V AC**

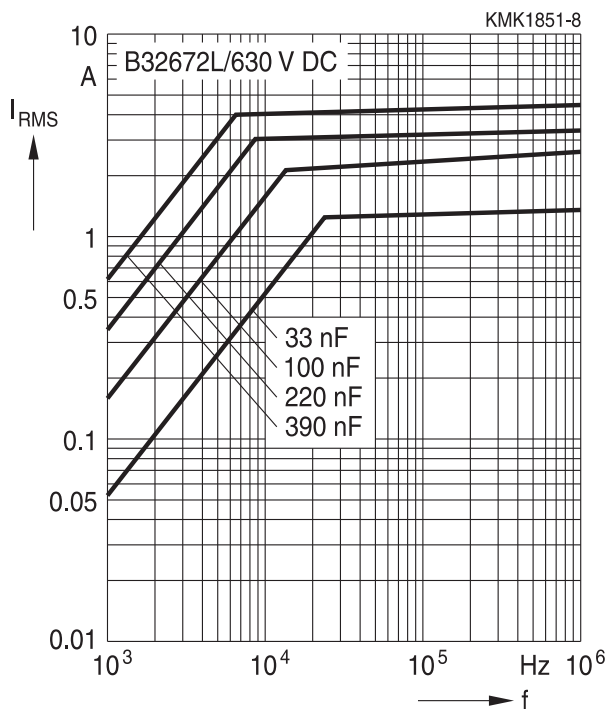


**1000 V DC/250 V AC**

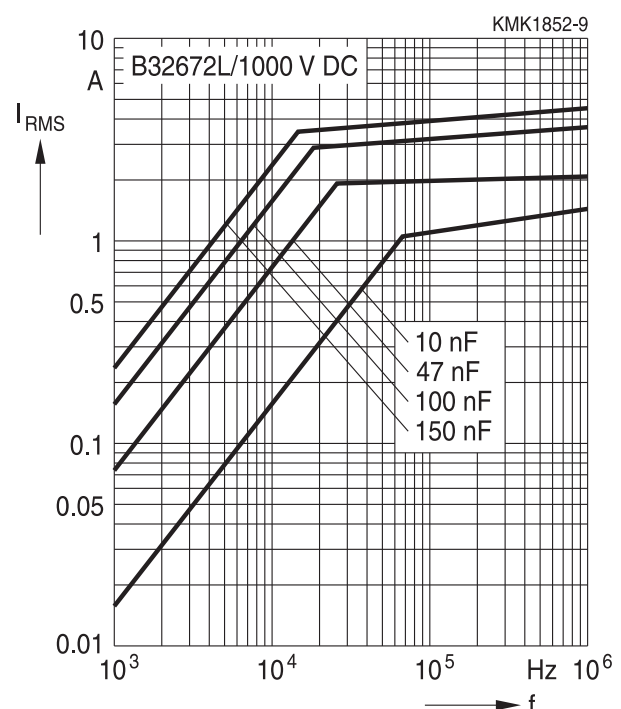

**B32672L**

**High V AC, high temperature (wound)**




**Permissible current  $I_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms  $T_A \leq 100\text{ }^\circ\text{C}$ )**


For  $T_A > 100\text{ }^\circ\text{C}$ , please use derating factor  $F_T$ .

**Lead spacing 15 mm**


**1300 V DC/500 V AC**

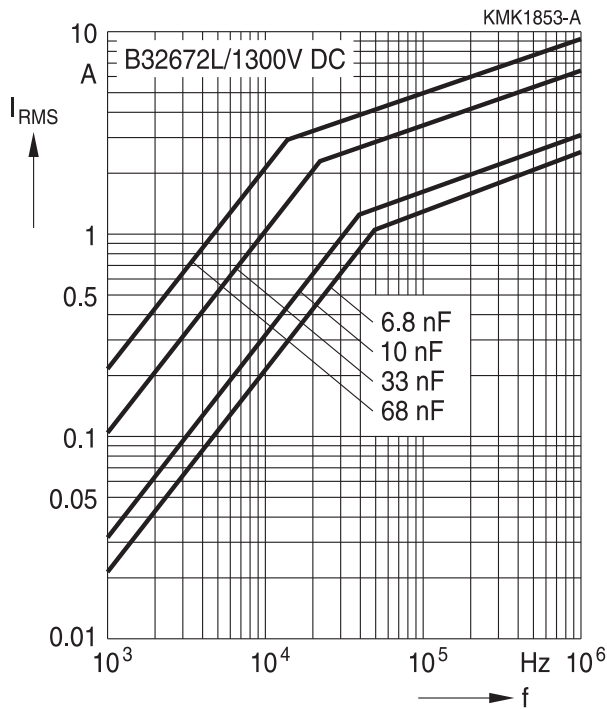


**1600 V DC/600 V AC**

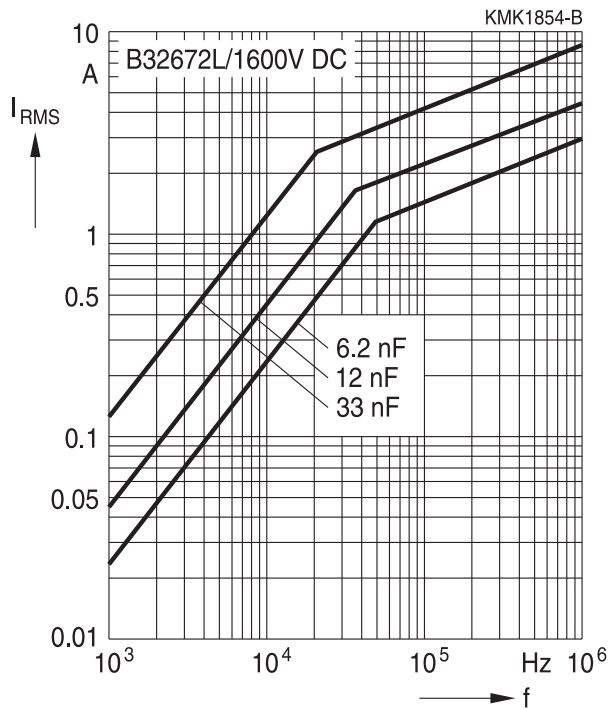


**2000 V DC/700 V AC**

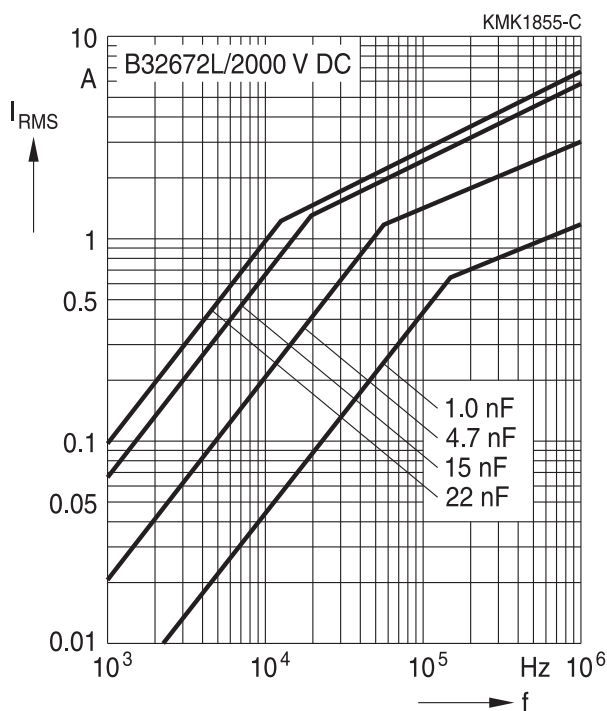

**2000 V DC/900 V AC**

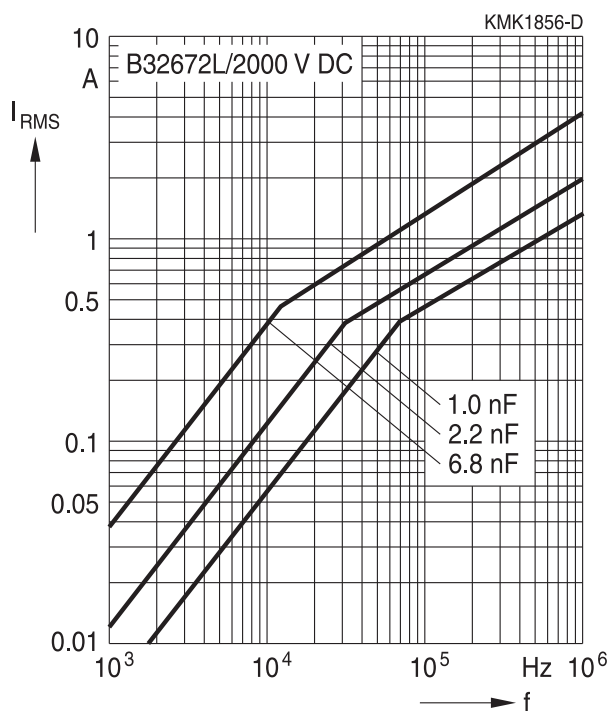





B32671L ... B32672L

High V AC, high temperature (wound)


### Maximum AC voltage ( $V_{RMS}$ ), current ( $I_{RMS}$ ) vs. frequency and temperature for $T_A > 100\text{ °C}$


The graphs described in the previous section for the permissible AC voltage ( $V_{RMS}$ ) or current ( $I_{RMS}$ ) vs. frequency are given for a maximum ambient temperature  $T_A \leq 100\text{ °C}$ . In case of higher ambient temperatures ( $T_A$ ), the self-heating ( $\Delta T$ ) of the component must be reduced to avoid that temperature of the component ( $T_{op} = T_A + \Delta T$ ) reaches values above maximum operating temperature. The factor  $F_T$  shall be applied in the following way:

$$I_{RMS}(T_A) = I_{RMS, T_A \leq 100\text{ °C}} \cdot F_T(T_A)$$

$$V_{RMS}(T_A) = V_{RMS, T_A \leq 100\text{ °C}} \cdot F_T(T_A)$$


And  $F_T$  is given by the following curve:

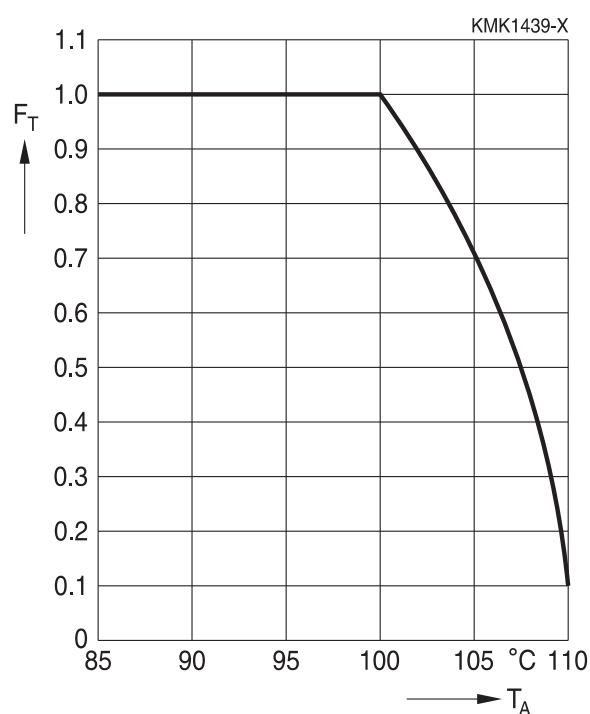



### Operation at overvoltages during heating and ignition of lamps ( $T_A \leq 40^\circ\text{C}$ )

In lighting applications, the capacitors can be subjected to overvoltages during the heating and ignition periods. An overvoltage occurs when the operation voltage exceeds the permissible AC voltage at the resonant frequency  $f_r$ .

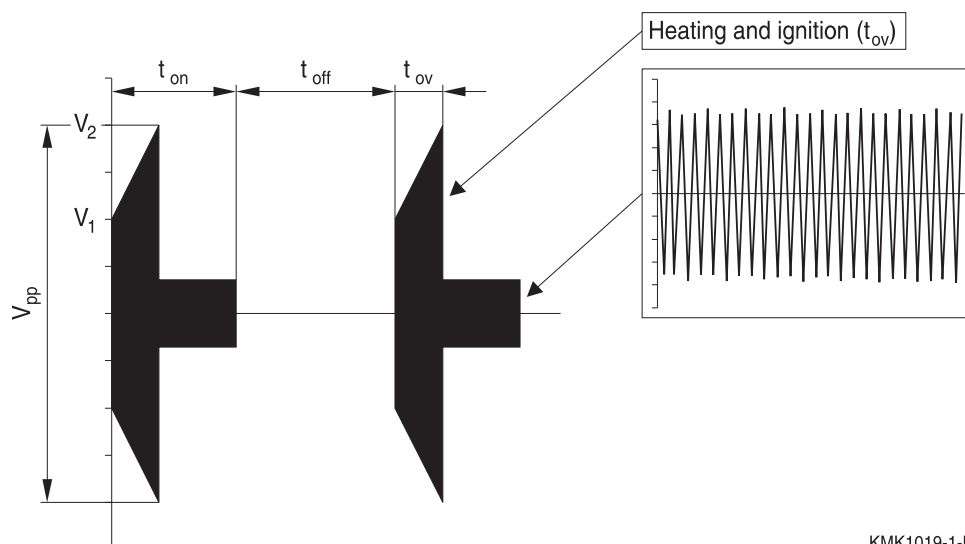

KMK1019-1-E

For a repetitive application of on/off switching pulses (as for example in the life tests applied by electronic ballast manufacturers), limits have to be imposed on the time periods under overvoltage and on the duty cycle, in order to keep the capacitance value within the required margins:

- The overvoltage time  $t_{ov}$  should be less than 1 sec.
- The  $K_0$  calculated in the overvoltage period (see general technical information) shall be lower than the maximum  $K_0$  provided.
- The maximum duty cycle of the overvoltage is given by

$$\frac{t_{ov}}{t_{on} + t_{off}} \leq \left( \frac{V_{RMS}}{V_{RMS,OV}} \right)^2 \cdot 0.5$$

where  $V_{RMS,OV}$  is the RMS voltage during period  $t_{ov}$

$$V_{rms,OV} = \sqrt{\frac{V_1^2 + V_1 \cdot V_2 + V_2^2}{6}}$$

and  $V_{RMS}$  is the permissible AC voltage for continuous operation at the resonant frequency  $f_r$  (given by the "permissible AC voltage versus frequency  $f$ " graphics in the previous pages).

- The drift of capacitance depends on the  $V_{pp}$  attained, and the total time under overvoltage, which is calculated in hours as follows:  
 $(N_i \cdot t_{ov}) / 3600$   
 where  $N_i$  is the number of overvoltage impulses and  $t_{ov}$  is expressed in seconds.

The maximum drift of capacitance as a function of both parameters is provided graphically in the following pages.