



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# SAW filters for infrastructure systems

## Series/Type: B4040

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39931B4040Z810		2013-03-08	2013-12-31	2014-03-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Characteristics channel 1 (Port 1 - Ant)**

Operable temperature range  $T_A = 0$  to  $55$  °C  
 Ant term. impedance  $Z_{Ant} = 50$  Ω  
 Port 1 term. impedance  $Z_{Port 1} = 50$  Ω  
 Port 2 term. impedance  $Z_{Port 2} = 50$  Ω

		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	926,25	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	3,5	4,5	dB
924,90 ... 928,15 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,5	2,0	dB
924,90 ... 928,15 MHz					
<b>Absolute attenuation</b>	$\alpha$				dB
450,00 ... 850,00 MHz		48	53	—	
850,00 ... 884,80 MHz		41	45	—	
884,80 ... 910,00 MHz		34	36	—	
910,00 ... 916,90 MHz		8	20	—	
935,00 ... 946,30 MHz		5	20	—	
946,30 ... 949,00 MHz		48	53	—	
967,70 ... 980,00 MHz		48	55	—	
980,00 ... 1350,00 MHz		40	44	—	
1350,00 ... 1800,00 MHz		21	26	—	

**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Characteristics channel 2 (Port 2 - Ant)**

Operable temperature range  $T_A = 0$  to  $55$  °C  
 Ant term. impedance  $Z_{Ant} = 50$  Ω  
 Port 1 term. impedance  $Z_{Port 1} = 50$  Ω  
 Port 2 term. impedance  $Z_{Port 2} = 50$  Ω


		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	903,75	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	2,8	4,0	dB
901,45 ... 905,10 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,4	2,0	dB
901,45 ... 905,10 MHz					
<b>Absolute attenuation</b>	$\alpha$				dB
450,00 ... 859,60 MHz		49	54	—	
859,60 ... 862,30 MHz		47	51	—	
862,30 ... 883,70 MHz		28	36	—	
883,70 ... 894,40 MHz		5	9	—	
913,15 ... 923,80 MHz		5	11	—	
923,80 ... 927,60 MHz		38	49	—	
945,20 ... 970,00 MHz		22	33	—	
970,00 ... 1050,00 MHz		48	54	—	
1050,00 ... 1350,00 MHz		40	49	—	
1350,00 ... 1800,00 MHz		25	39	—	

**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Frequency response channel 1 :**

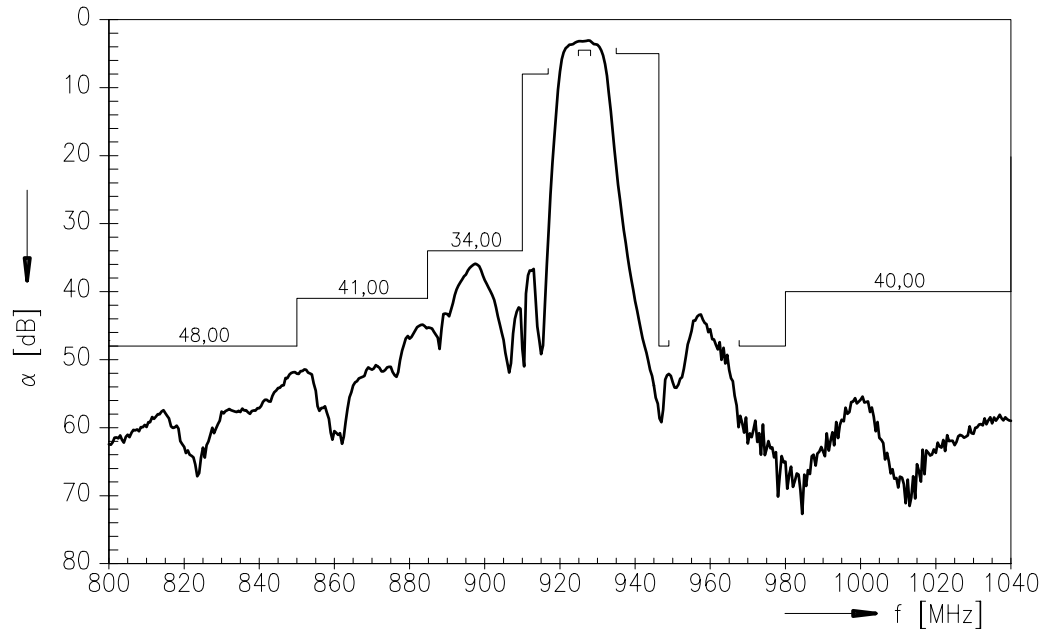

**Frequency response channel 2 :**

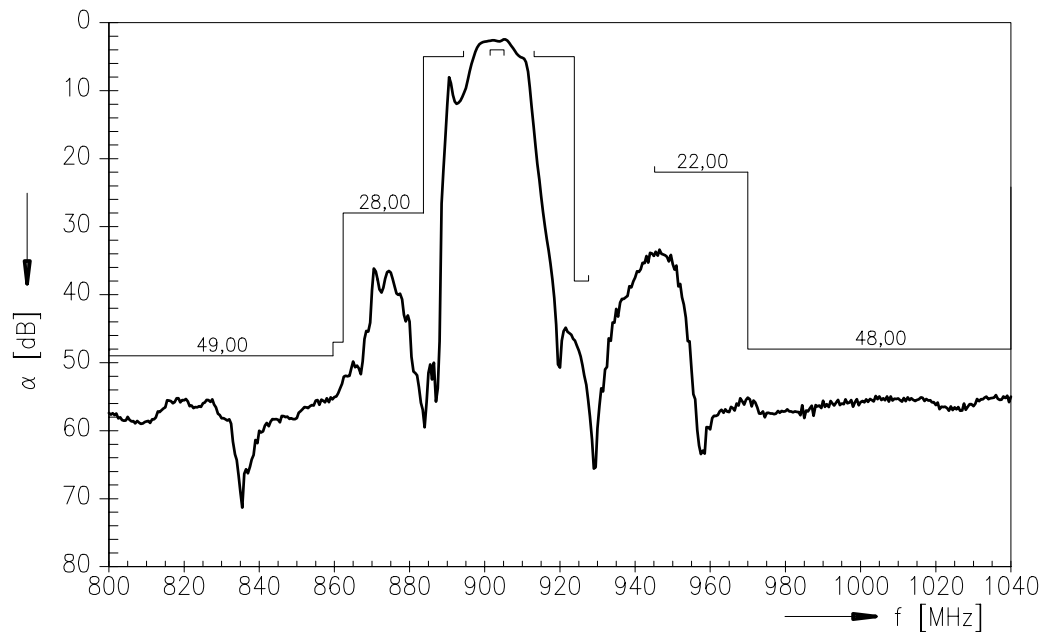


**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Frequency response channel 1 : (passband)**

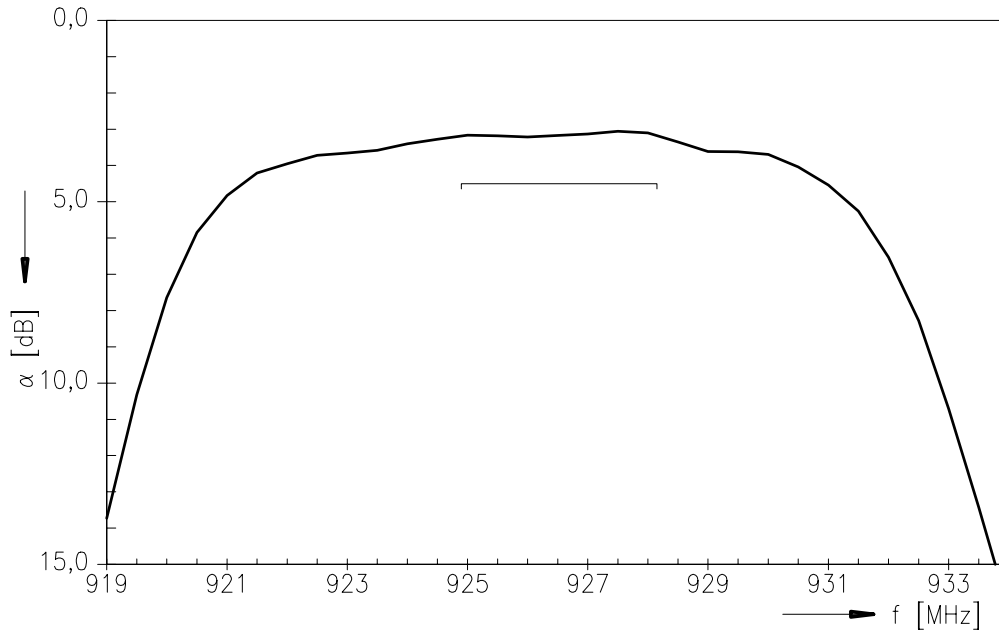

**Frequency response channel 2 : (passband)**

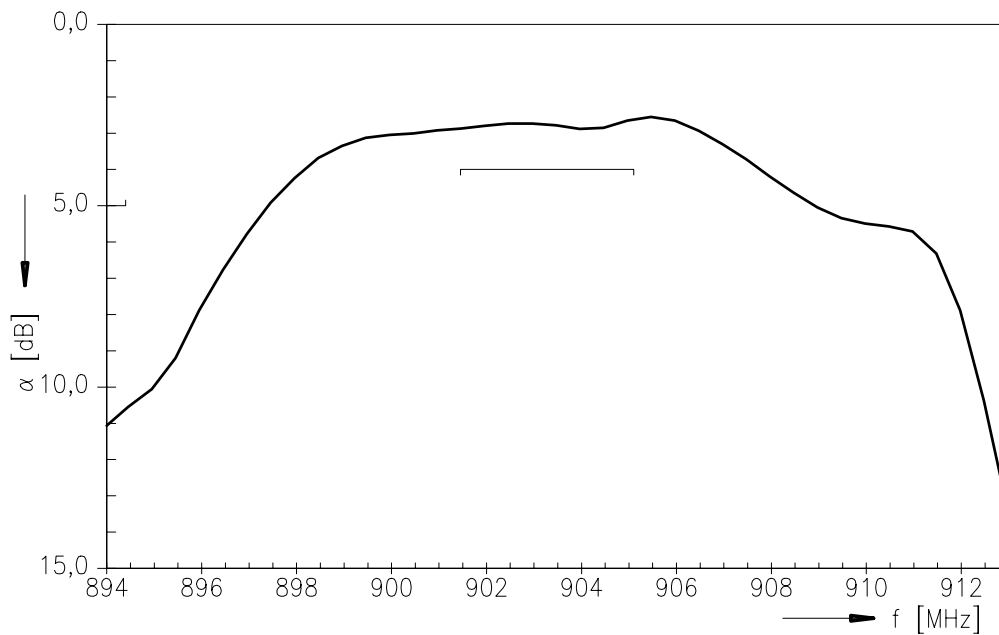




**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**


**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Frequency response channel 1 : (wideband)**

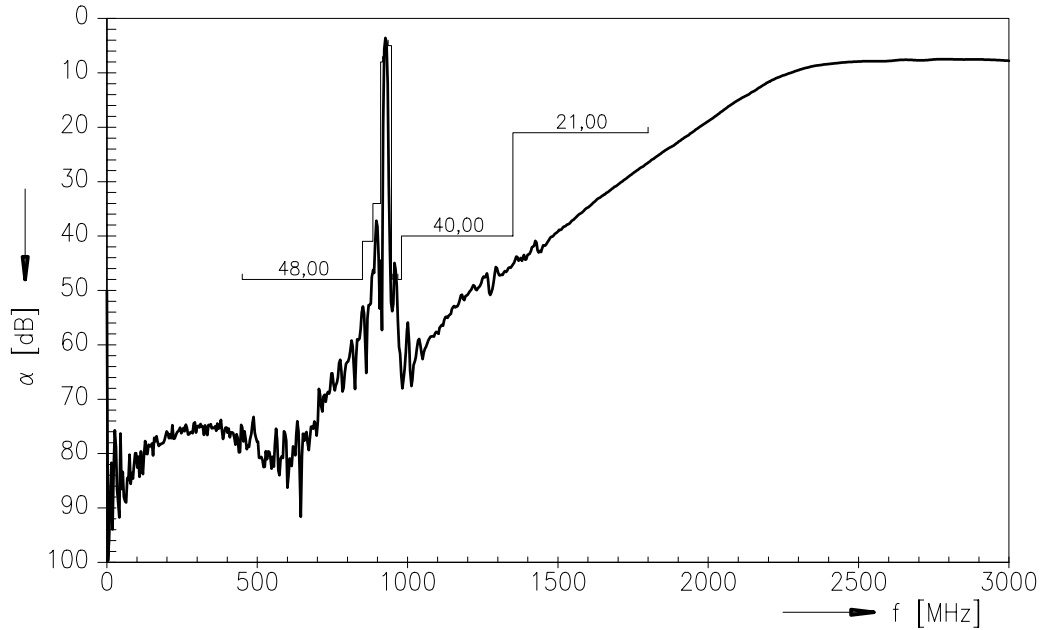

**Frequency response channel 1 : (wideband)**

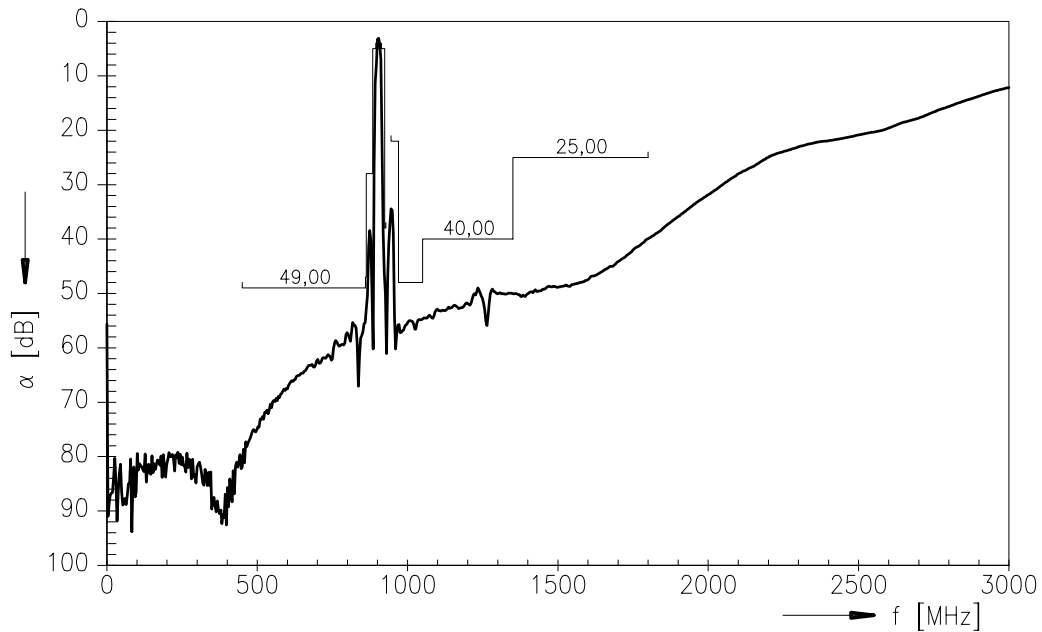

**SAW Components**  
**Low-Loss Duplexer for Mobile Communication**

**B4040**  
**926,25 MHz**  
**903,75 MHz**

**Data Sheet**

**Isolation between channel 1 and channel 2**

Operating temperature range  $T = 0$  to  $+55$  °C  
 Ant term. impedance  $Z_{Ant} = 50 \Omega$   
 Port 1 term. impedance  $Z_{Port 1} = 50 \Omega$   
 Port 2 term. impedance  $Z_{Port 2} = 50 \Omega$

		min.	typ.	max.	
<b>Absolute attenuation</b>	$\alpha$				
	924,90 ... 928,15 MHz	37	47	—	dB
	901,45 ... 905,10 MHz	37	43	—	dB

**Isolation between channel 1 and channel 2 :**

