



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

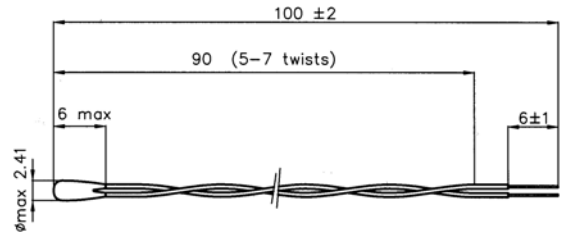


Data sheet
Application

Industrial electronics

Version

NTC soldered to wire and coated with Epoxy.
 wire: AWG30, Ni-core, silvered \varnothing 0.25mm
 PTFE insulation, colour blue
 coating: Epoxy resin, colour black;
 length of components: 100 ± 2 mm
 stripped length: 6 ± 1 mm,
 head diameter: 2.41 mm max
 head length: 5 mm max (6.0 mm max)


Data

Climatic Category (IEC 60068-1) (test without voltage)		: 55/155/56
Lower category temperature		[°C]: -55
Upper category temperature		[°C]: 155
Rated resistance // Tolerance	R_N	[Ω // %]: 10 000 // ± 1
Rated temperature	T_N	[°C]: 25
B-value : $B_{(25/100)}$ // Tolerance	B_N	[K//%]: 3988 // ± 1
R/T-Curve no. // R_{25}		[n // Ω]: 8016 // 10 000
Max. power rating at 25°C	P_{25}	[mW]: 60
Dissipation factor (in air)	δ_{th}	[mW/K]: approx. 1.5
Thermal cooling time constant (in air)	τ_C	[s]: approx. 15
Heat capacity	C_{th}	[mJ/K]: approx. 22.5

Remarks

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

ISSUE DATE	11.02.04	ISSUE	a	PUBLISHER	KB S PE	PAGE	1/2
------------	----------	-------	---	-----------	---------	------	-----



Product division: NTC

Product type: S861/10k/A43

Product name: NTC Sensor

Ordering code: B57861S0103A043

Data sheet

NTC Resistance Temperature Curve

R/T-Curve 8016 / A01 B(25/100) 3988 [K] ± 1 [%]
 R at 25°C 10 000 [Ω] RN at 25 °C 10 000 [Ω] ± 1 [%]

Temp. [°C]	R_nom [Ω]	R_min [Ω]	R_max [Ω]	ΔR [±%]
-55	963048	905697	1020399	6,0
-50	670100	632939	707261	5,5
-45	471687	447377	495998	5,2
-40	336500	320419	352582	4,8
-35	242589	231867	253311	4,4
-30	177000	169786	184214	4,1
-25	130370	125487	135252	3,7
-20	97070	93743	100397	3,4
-15	72929	70652	75206	3,1
-10	55330	53765	56895	2,8
-5	42315	41237	43393	2,5
0	32650	31907	33393	2,3
5	25388	24877	25898	2,0
10	19900	19550	20250	1,8
15	15708	15470	15946	1,5
20	12490	12330	12650	1,3
25	10000	9900	10100	1,0
30	8057	7955	8159	1,3
35	6531	6434	6628	1,5
40	5327	5237	5417	1,7
45	4369	4286	4451	1,9
50	3603	3528	3678	2,1
55	2986	2918	3054	2,3
60	2488	2427	2549	2,5
65	2083	2028	2138	2,6
70	1752	1703	1801	2,8
75	1481	1437	1525	3,0
80	1258	1219	1297	3,1
85	1072	1037	1108	3,3
90	917,7	886,1	949,3	3,4
95	788,5	760,2	816,9	3,6
100	680,0	654,6	705,4	3,7
105	588,6	565,8	611,4	3,9
110	511,2	490,7	531,7	4,0
115	445,4	426,9	463,9	4,2
120	389,3	372,6	406,0	4,3
125	341,7	326,6	356,8	4,4
130	300,9	287,3	314,5	4,5
135	265,4	253,1	277,8	4,7
140	234,8	223,6	246,0	4,8
145	208,3	198,1	218,5	4,9
150	185,3	176,0	194,6	5,0
155	165,3	156,9	173,8	5,1

ISSUE DATE	11.02.04	ISSUE	a	PUBLISHER	KB S PE	PAGE	2/2
------------	----------	-------	---	-----------	---------	------	-----