



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Silicon PIN Diode

- Series diode for mobile communication in low loss transmit-receiver switches
- Band switch for TV-tuners
- Very low forward resistance (typ. 0.65 Ω @ 5 mA)
- Low capacitance (typ. 0.5 pF @ 0V)
- Fast switching applications
- Pb-free (RoHS compliant) package

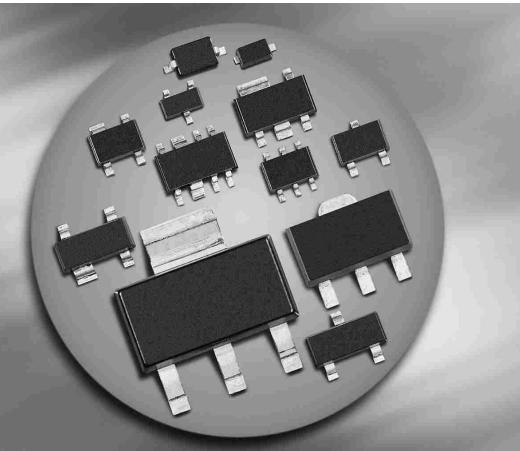
BAR65-02L
BAR65-02V
BAR65-03W


Type	Package	Configuration	L_S (nH)	Marking
BAR65-02L*	TSLP-2-1	single, leadless	0.4	NN
BAR65-02V	SC79	single	0.6	N
BAR65-03W	SOD323	single	1.8	blue M

* Preliminary Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	30	V
Forward current	I_F	100	mA
Total power dissipation BAR65-02L, $T_S \leq 128^\circ\text{C}$ BAR65-02V, $T_S \leq 118^\circ\text{C}$ BAR65-03W, $T_S \leq 113^\circ\text{C}$	P_{tot}	250 250 250	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Operating temperature range	T_{op}	-55 ... 125	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BAR65-02L	R_{thJS}	≤ 90	K/W
BAR65-02V		≤ 130	
BAR65-03W		≤ 145	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Reverse current $V_R = 20 \text{ V}$	I_R	-	-	20	nA
Forward voltage $I_F = 100 \text{ mA}$	V_F	-	0.93	1	V


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance $V_R = 1 \text{ V}, f = 1 \text{ MHz}$ $V_R = 3 \text{ V}, f = 1 \text{ MHz}$ $V_R = 0 \text{ V}, f = 100 \text{ MHz} \dots 1.8 \text{ GHz}$	C_T	-	0.45	0.9	pF
Reverse parallel resistance $V_R = 0 \text{ V}, f = 100 \text{ MHz}$ $V_R = 0 \text{ V}, f = 1 \text{ GHz}$ $V_R = 0 \text{ V}, f = 1.8 \text{ GHz}$	R_P	-	700	-	kΩ
Forward resistance $I_F = 1 \text{ mA}, f = 100 \text{ MHz}$ $I_F = 5 \text{ mA}, f = 100 \text{ MHz}$ $I_F = 10 \text{ mA}, f = 100 \text{ MHz}$	r_f	-	1	-	Ω
Charge carrier life time $I_F = 10 \text{ mA}, I_R = 6 \text{ mA}, \text{measured at } I_R = 3 \text{ mA}, R_L = 100 \Omega$	τ_{rr}	-	80	-	ns
I-region width	W_I	-	3.5	-	μm
Insertion loss ¹⁾ $I_F = 1 \text{ mA}, f = 1.8 \text{ GHz}$ $I_F = 5 \text{ mA}, f = 1.8 \text{ GHz}$ $I_F = 10 \text{ mA}, f = 1.8 \text{ GHz}$	I_L	-	0.08	-	dB
Isolation ¹⁾ $V_R = 0 \text{ V}, f = 0.9 \text{ GHz}$ $V_R = 0 \text{ V}, f = 1.8 \text{ GHz}$ $V_R = 0 \text{ V}, f = 2.45 \text{ GHz}$	I_{SO}	-	12	-	
¹ BAR65-02L in series configuration, $Z = 50\Omega$					


Diode capacitance $C_T = f(V_R)$

f = Parameter

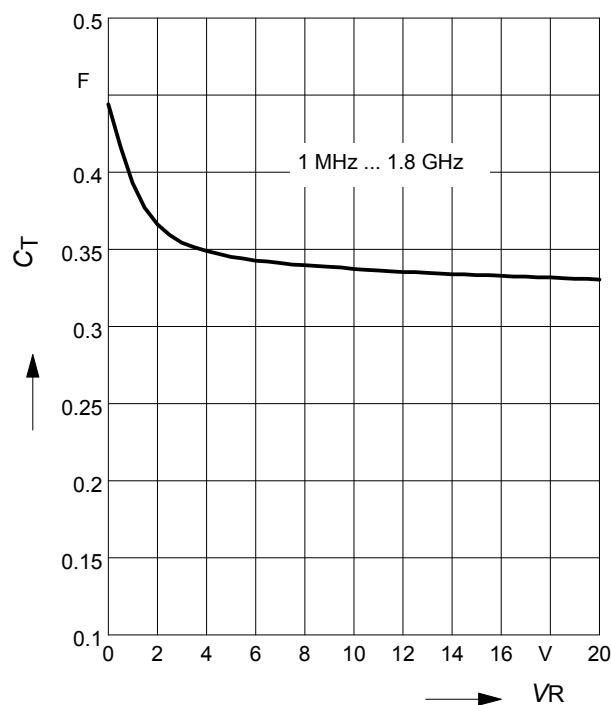


Reverse parallel resistance $R_P = f(V_R)$

f = Parameter

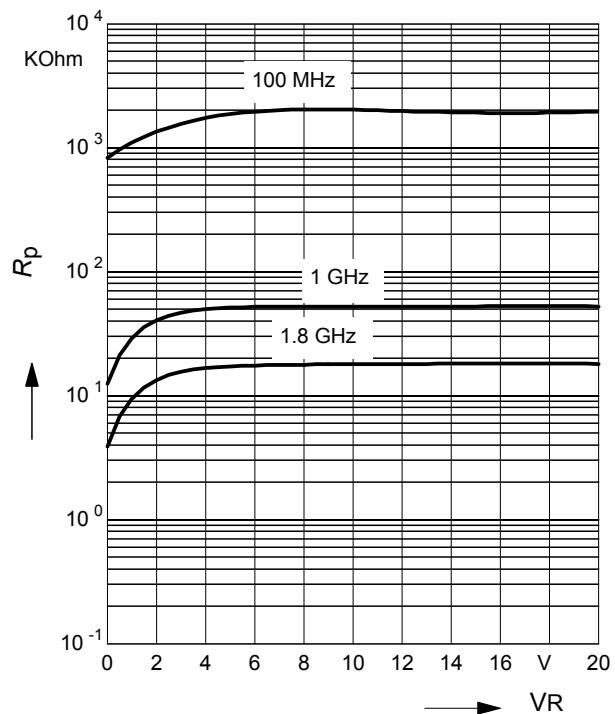


Forward resistance $r_f = f(I_F)$

f = 100MHz

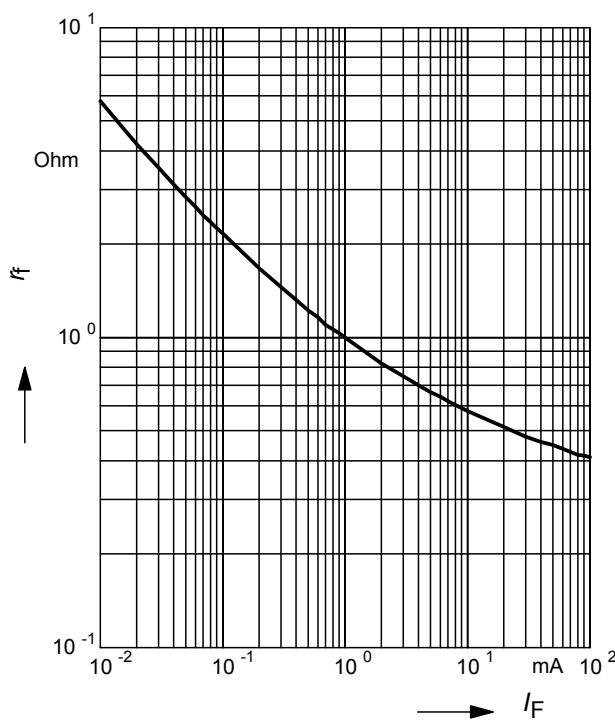


Forward current $I_F = f(V_F)$


T_A = Parameter

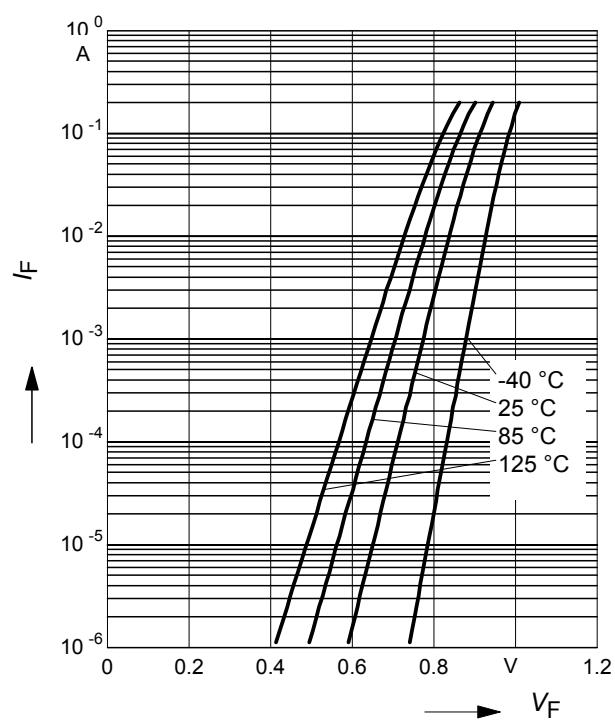


Forward current $I_F = f(T_S)$
BAR65-02L

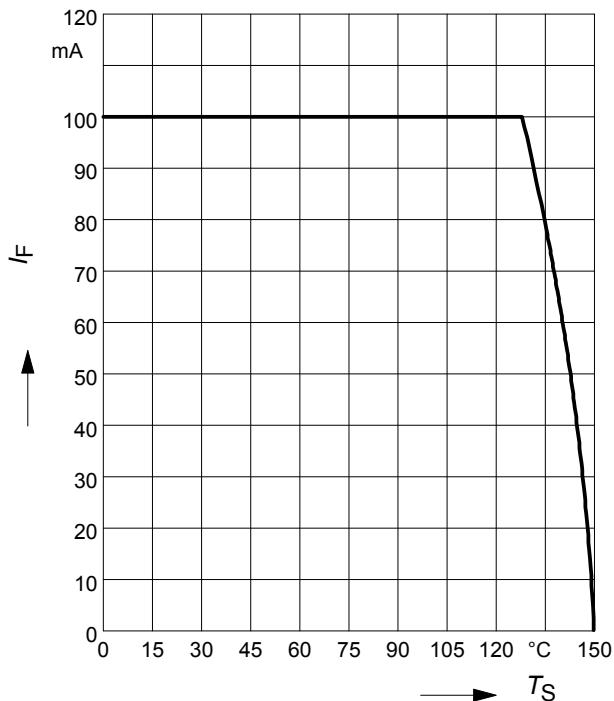

Forward current $I_F = f(T_S)$
BAR65-02V

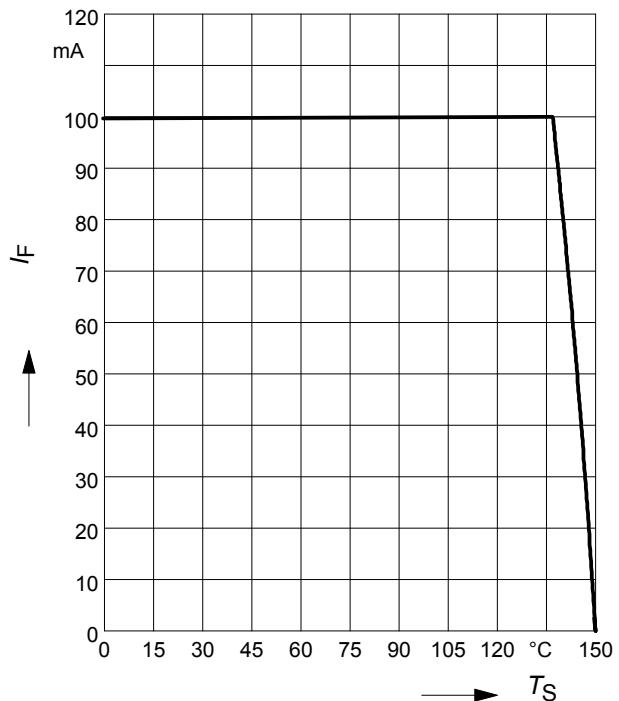


Forward current $I_F = f(T_S)$
BAR65-03W

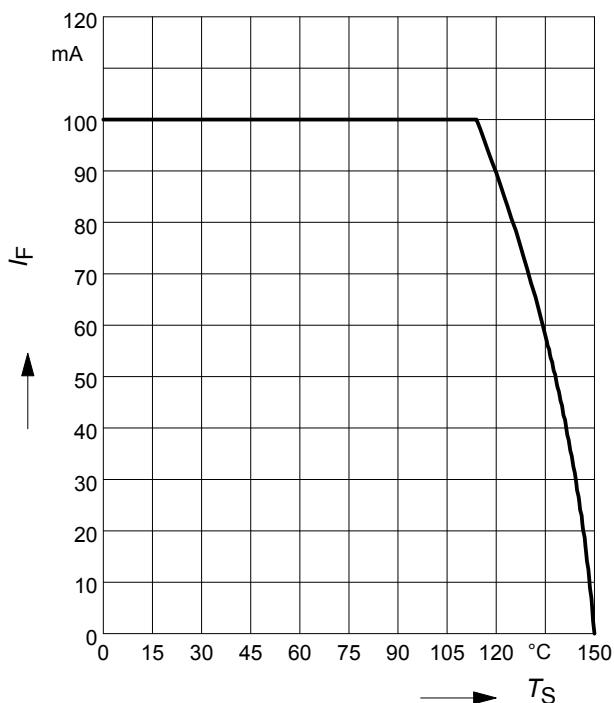


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAR65-02L

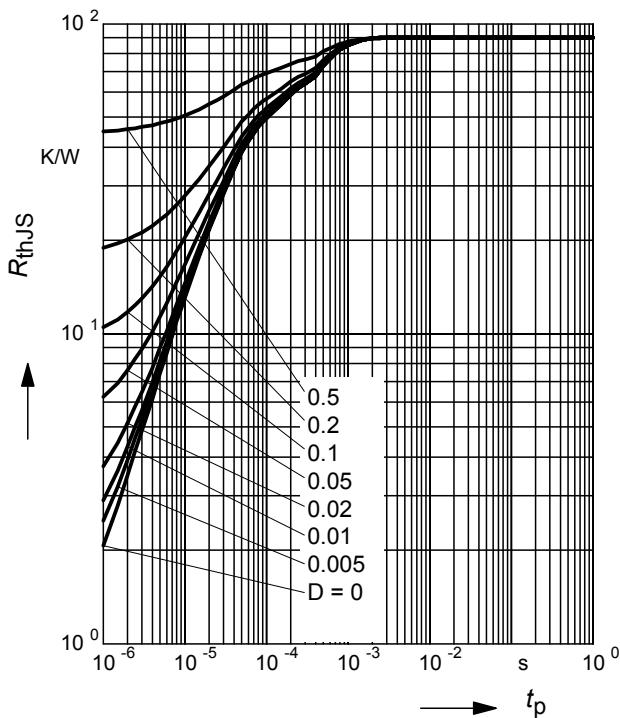

Permissible Pulse Load

$$I_{\text{Fmax}}/I_{\text{FDC}} = f(t_p)$$

BAR65-02L

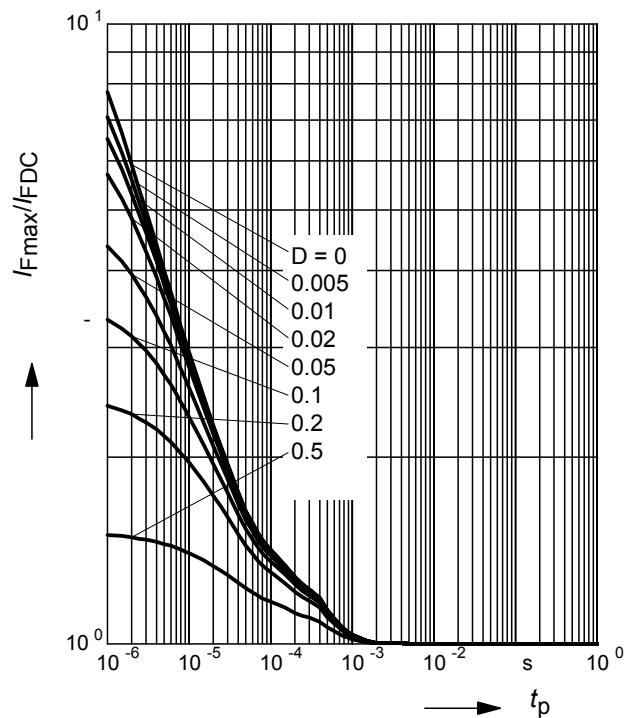

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAR65-02V

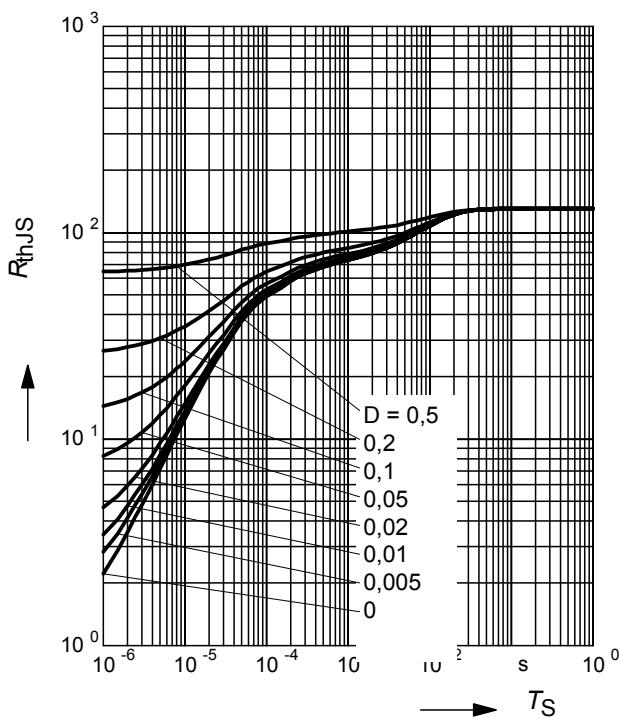
Permissible Pulse Load


$$I_{\text{Fmax}}/I_{\text{FDC}} = f(t_p)$$

BAR65-02V

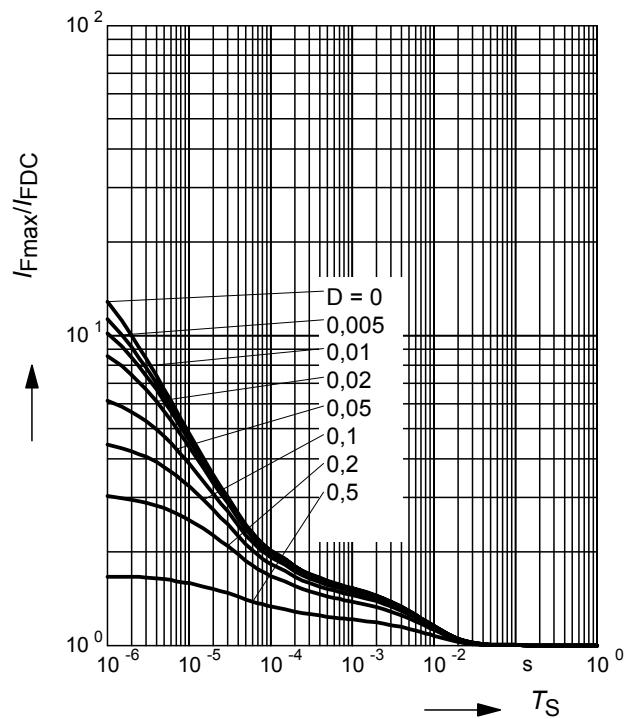


Permissible Puls Load $R_{thJS} = f(t_p)$


BAR65-03W

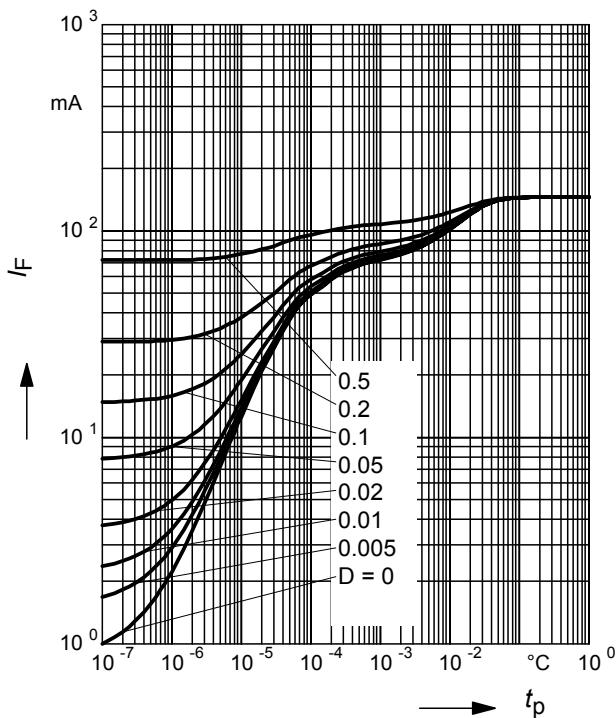

Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$


BAR65-03W

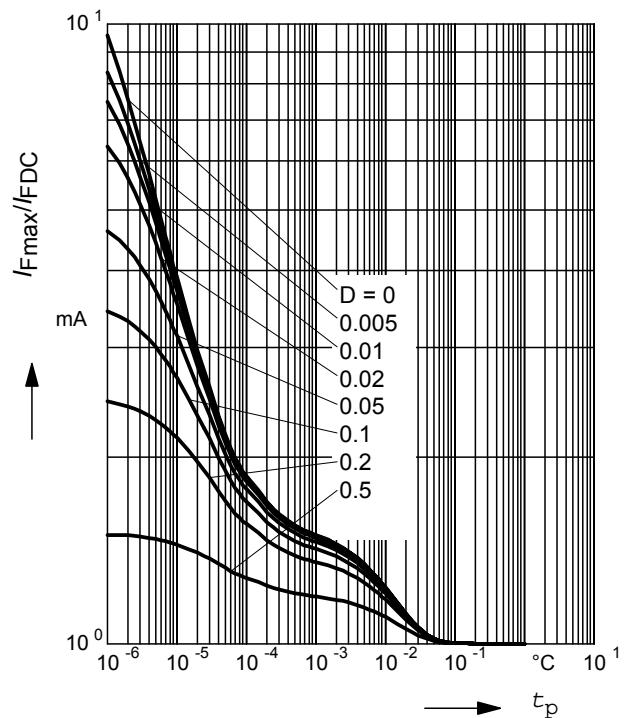
Insertion loss $I_L = -|S_{21}|^2 = f(f)$
 I_F = Parameter

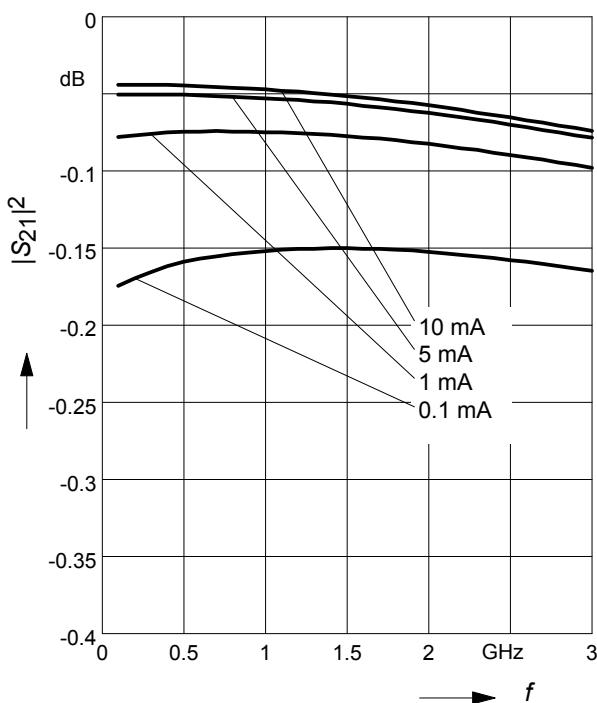
 BAR65-02L in series configuration, $Z = 50\Omega$

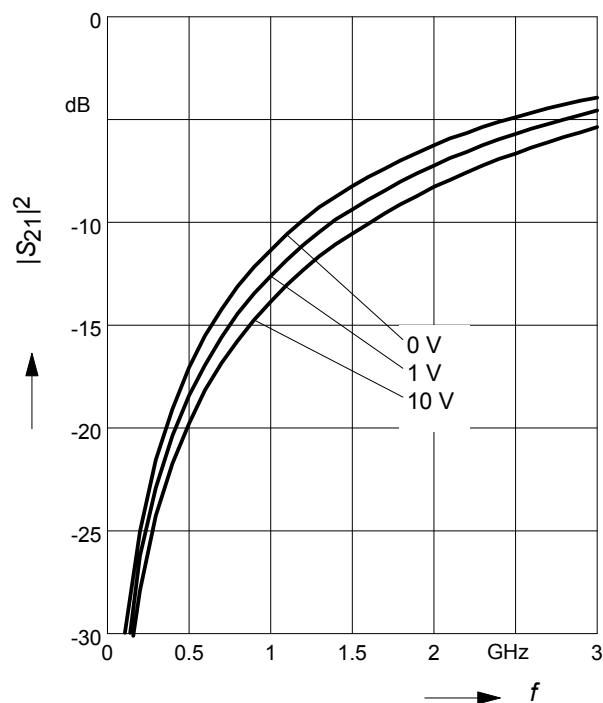Isolation $I_{SO} = -|S_{21}|^2 = f(f)$
 V_R = Parameter

 BAR65-02L in series configuration $Z = 50\Omega$

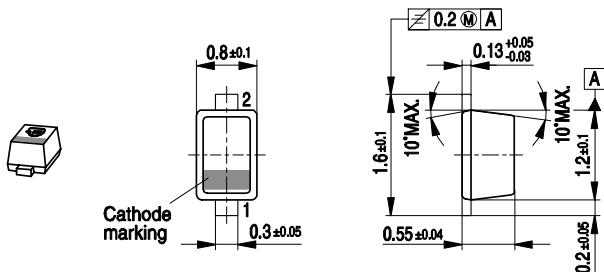
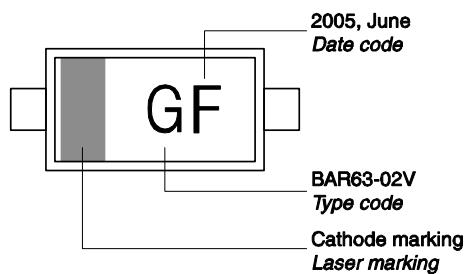
Package Outline



Foot Print




Marking Layout (Example)



Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø180 mm = 8.000 Pieces/Reel (2 mm Pitch)
 Reel ø330 mm = 10.000 Pieces/Reel

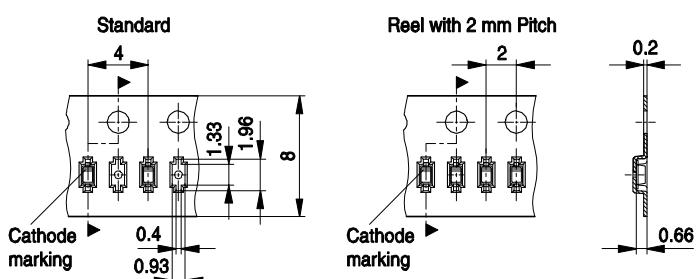


Date Code marking for discrete packages with
one digit (SCD80, SC79, SC75¹⁾) CES-Code


Month	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014
01	a	p	A	P	a	p	A	P	a	p	A	P
02	b	q	B	Q	b	q	B	Q	b	q	B	Q
03	c	r	C	R	c	r	C	R	c	r	C	R
04	d	s	D	S	d	s	D	S	d	s	D	S
05	e	t	E	T	e	t	E	T	e	t	E	T
06	f	u	F	U	f	u	F	U	f	u	F	U
07	g	v	G	V	g	v	G	V	g	v	G	V
08	h	x	H	X	h	x	H	X	h	x	H	X
09	j	y	J	Y	j	y	J	Y	j	y	J	Y
10	k	z	K	Z	k	z	K	Z	k	z	K	Z
11	l	2	L	4	l	2	L	4	l	2	L	4
12	n	3	N	5	n	3	N	5	n	3	N	5

1) New Marking Layout for SC75, implemented at October 2005.


Package Outline

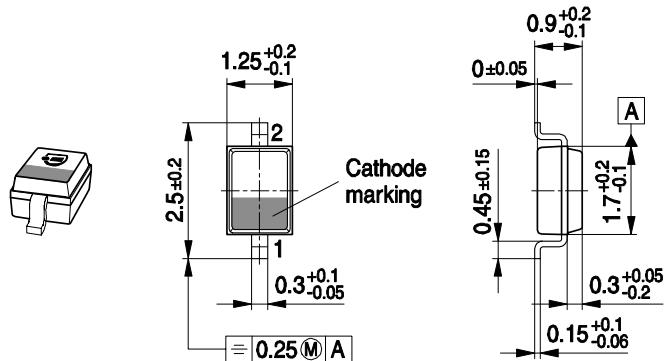

Foot Print

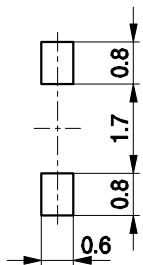


Marking Layout (Example)

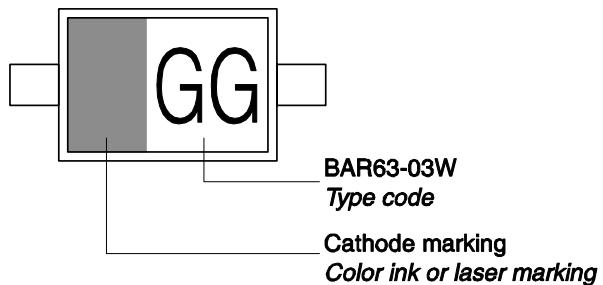


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø330 mm = 10.000 Pieces/Reel

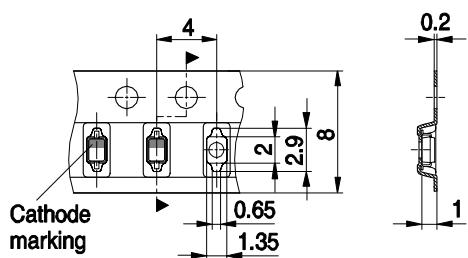


Package Outline

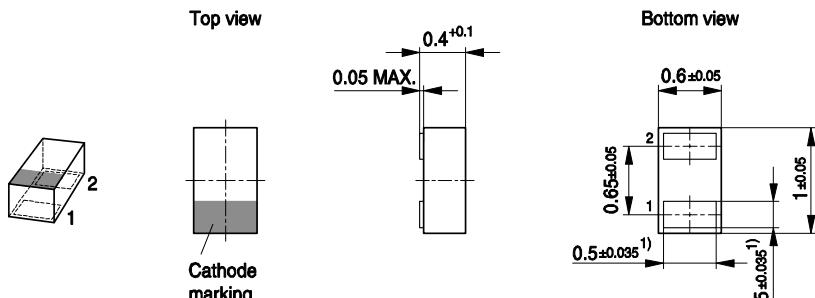

1) Dimension applies to plated terminal


Foot Print

For board assembly information please refer to Infineon website "Packages"

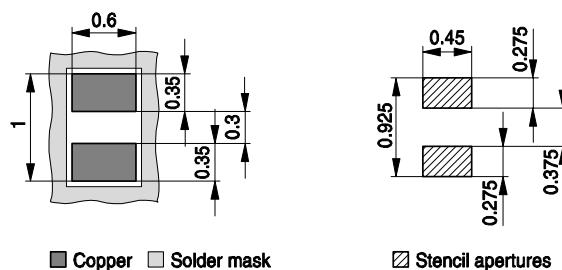


■ Copper □ Solder mask ▨ Stencil apertures

Marking Layout (Example)

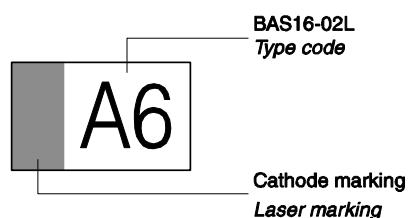

Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel
 Reel ø330 mm = 50.000 Pieces/Reel (optional)

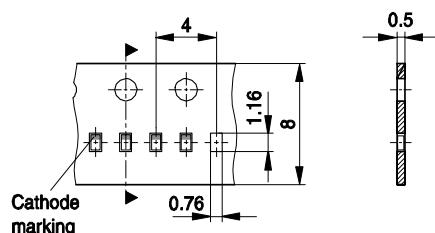

Edition 2009-11-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.