



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# USB Ranger® 2212


## Cat 5 USB 2.0 Extender with Remote Power



Ranger 2212 extends USB 2.0 beyond the desktop up to 100m over standard Cat 5 cable using ExtremeUSB® technology.

### Ranger 2212 Features

- System delivers power to remote hub over Cat 5 extension link simplifying installation and eliminating the need for AC power close to the remote unit.
- Powered by ExtremeUSB®. Long reach USB 2.0 enabled by Icron's LionsGate™ USB 2.0 Extension ASIC.
- Extends USB 2.0 high-speed and USB 1.1 (low-speed, full speed) devices up to 100m over Cat 5 cable.
- Operates with USB 2.0 high-speed host controllers and USB 1.1 classic hosts.
- Supports all USB device types: Control, Interrupt, Bulk and Isochronous at up to 480Mbps.
- True plug and play, ready to operate right out of the box. No new driver installation required.
- Supports all major operating systems including Windows®, Mac OS®, and Linux®.
- Integrated hub provides two USB 2.0 ports. Number of devices can be increased using additional USB hubs.
- Remote unit provides standard 500mA to each USB port.
- Ideal for a wide variety of USB devices, from printers, scanners, hard drives, and audio devices, to touch screens, web cams, and game controllers.

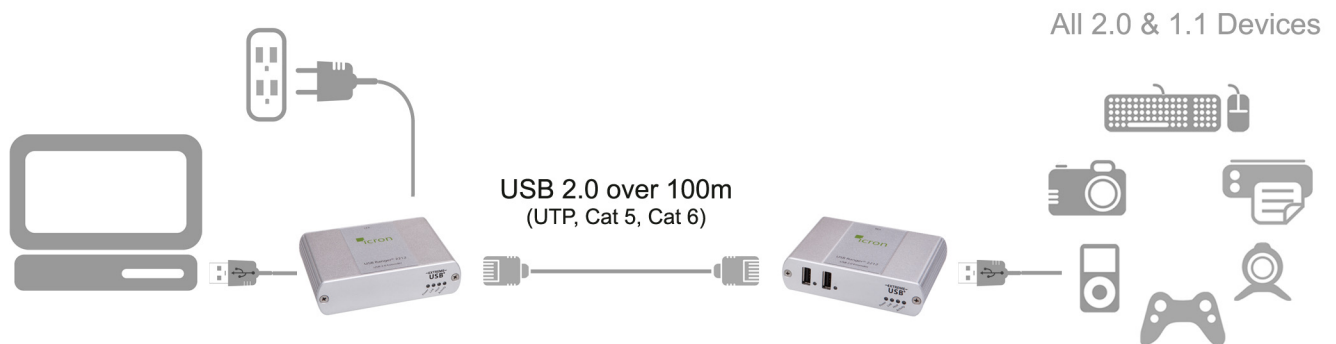

# USB Ranger® 2212

## Applications

- Industrial Control
- Digital Signage
- Home Network Integration
- Medical Device Connectivity
- KVM Extension
- Remote Desktop USB Connections
- Security: web camera, access control.
- USB Device Sharing: print, scan, storage.

## Ordering Information

The Ranger 2212 system includes a Local Extender (LEX) module, a Remote Extender (REX) module, a 2 meter USB cable, and an International power adapter with country specific cord.

Name	Part Number	Description
USB Ranger® 2212	00-00252	2-Port Remote Powered Cat 5 USB 2.0 Extender, International (100-240V) Power Adapter: North American plug
USB Ranger® 2212	00-00253	2-Port Remote Powered Cat 5 USB 2.0 Extender, International (100-240V) Power Adapter: European plug
USB Ranger® 2212	00-00254	2-Port Remote Powered Cat 5 USB 2.0 Extender, International (100-240V) Power Adapter: UK plug
USB Ranger® 2212	00-00255	2-Port Remote Powered Cat 5 USB 2.0 Extender, International (100-240V) Power Adapter: Australian plug

## Product Specifications

Range	330 ft (100m) over Cat 5e (or better) cable
LEX unit USB connector	1 x USB Type B
LEX unit Link connector	1 x RJ45
REX unit Link connector	1 x RJ45
REX unit USB connector	2 x USB Type A
Maximum USB devices supported	14 USB devices or 3 USB hubs with 11 USB devices
Power adapter Maximum Rating	24V DC @ 1A (LEX only)
Current available to USB at REX	2 x 500mA
LEX and REX unit dimensions	3.94" x 2.99" x 1.02" (100 mm x 76 mm x 26 mm)
Operating temperature range	0°C to 50°C
Total system shipping weight	2.2 lbs. (1.0 kilograms)
Regulatory testing	FCC (Class B), IC (Class B), CE (Class B)
ESD Rating	EMC EN-61000-4-2:2001 4kV Contact, 8kV Air

Specifications subject to change without notification.

Contact [sales@icron.com](mailto:sales@icron.com) for more information or OEM options.