



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



USB 3.0 Spectra™ 3022 Extender

2-Port USB 3.0 100m Multimode Fiber Extender System

The USB 3.0 Spectra™ 3022 extends SuperSpeed USB 3.0 up to 100m (330 ft).*



Features

Take advantage of USB 3.0's blazing 5 Gbps speeds up to 100m of distance over multimode fiber. Machine Vision cameras, security cameras, conferencing cameras and storage drives can be extended while providing isolation and security. Key features include:


- USB 3.0 extension up to 100m
- Delivers speed, isolation and security over multimode fiber
- Supports USB 3.0 throughputs of up to 5 Gbps
- Integrated 2-port hub suitable for industrial environments
- Rugged locking USB and power connectors
- Enclosures with convenient pre-drilled holes for optional bracket mounting
- Works with AIA USB3 Vision™ compliant devices

Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, OS X® and Linux®

Applications

- Machine Vision camera extension
- Security camera extension
- Post-production editing
- Conferencing camera extension
- Remote storage

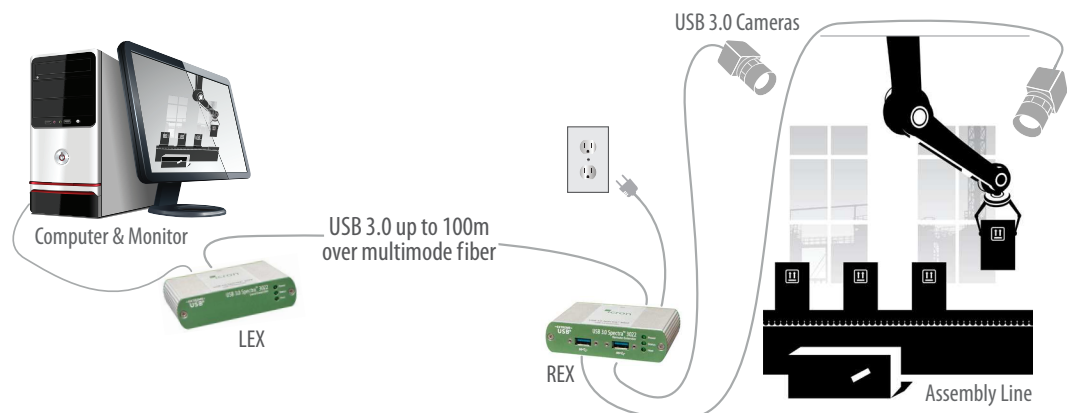

* Up to 50m with USB 3.0 storage type devices; up to 100m or more is achievable when using USB 3.0 bulk traffic cameras. For Microsoft Kinect applications, please use the Spectra™ 3001-15 active extension cable.



4664 Lougheed Hwy.
Suite 221
Burnaby, BC,
V5C 5T5, Canada

icron.com
+1 604 638 3920




Specifications subject to
change without notification.
©2016
Icron Technologies Corp.
#90-01040-A10

USB 3.0 Spectra™ 3022 Specifications

Multimode Fiber Class	Cameras	Storage
OM2	50m	50m
OM3	100m	50m

* Up to 50m with USB 3.0 storage type devices; up to 100m or more is achievable when using USB 3.0 bulk traffic cameras.



Locking USB Receptacle



Locking Power Connector



Specifications subject to change without notification.
©2016
Icron Technologies Corp.
#90-01040-A10

RANGE*

- OM2 Multimode Fiber: Up to 50m (165 ft)
- OM3 Multimode Fiber: Up to 100m (330 ft)

SPEEDS

- USB 3.0: Up to 5 Gbps (Not backward compatible with USB 2.0/1.1)

LEX

- USB Connector: 1 x USB 3.0 Type B Locking Receptacle per AIA USB3 Vision™ specification
- Link Connector: 1 x Duplex LC Connector
- Dimensions: 100mm x 76mm x 26mm (3.94" x 2.99" x 1.02")
- Enclosure Material: Anodized Aluminum

REX

- USB Connectors: 2 x USB 3.0 Type A Locking Receptacles per AIA USB3 Vision™ specification
- Link Connector: 1 x Duplex LC Connector
- Dimensions: 100mm x 76mm x 26mm (3.94" x 2.99" x 1.02")
- Enclosure Material: Anodized Aluminum
- Power Connector: 24V DC, 1A, Locking, 2.5 mm, center-positive
- Available Current: 900mA for each USB Port
- Power Supply: 100-240V AC Brick, Locking

ENVIRONMENTAL

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- Storage Temperature: -20°C to 70°C (-4°F to 158°F)
- Operating Humidity: 20% to 80% relative humidity, non-condensing
- Storage Humidity: 10% to 90% relative humidity, non-condensing

COMPLIANCE

- EMC: FCC (Class B), CE (Class B)
- Environmental: RoHS2 (CE)
- Machine Vision: Works with AIA USB3 Vision™ compliant devices

SUPPORT

- Warranty: 2-year

Ordering Information

The USB 3.0 Spectra™ 3022 extender system includes a LEX, REX, locking power adapter, country specific power cord, USB 3.0 cable, Quick Start Guide and two-year warranty. For more information please email sales@icron.com, call +1 604 638 3920 or locate a distributor/reseller in your area by visiting icron.com/where-to-buy.

PART #	NAME	DESCRIPTION
00-00327	USB 3.0 Spectra™ 3022 - NA	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking NA Power Cord
00-00328	USB 3.0 Spectra™ 3022 - EU	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking EU Power Cord
00-00329	USB 3.0 Spectra™ 3022 - UK	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking UK Power Cord
00-00330	USB 3.0 Spectra™ 3022 - AU	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking AU Power Cord
00-00371	USB 3.0 Spectra™ 3022 - JP	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking JP Power Cord
10-00406	USB Mounting Kit - Silver	USB Extender Mounting Kit for 2201, 2204, 2212, 2224, 2244, 2304, 3022 (Silver) Kit includes: 2 brackets, 4 locking washers and 4 (M3 x 5mm) Phillips pan head screws (Order: 1 kit per LEX or REX; 2 kits per system)