



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RS-232 2kV Isolated Repeater


2320PDR

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com

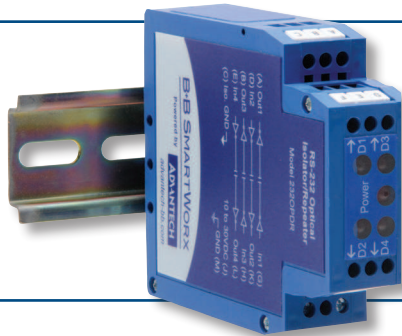

The 2320PDR is a DIN rail mountable RS-232 optical isolator and repeater. It provides 2,000 V isolation for four RS-232 signal lines (two in each direction). The isolator has four LED's to show data flow and one LED to indicate power. Connections are made to a terminal block. The isolation provides protection for computer equipment from ground loops and induced currents caused by lightning or heavy electrical loads. It also functions as a repeater to extend RS-232 signals another 15.2 meters (50 ft.). The 2320PDR can support two data pairs or one data pair plus control signals in both directions.

PRODUCT FEATURES

- Extend RS-232 data another 15.2 m (50 ft.)
- 2,000V optically isolated data lines
- -40 to +80°C operating temperature
- Terminal block connections
- UL Recognized
- NEMA TS2

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
2320PDR	RS-232 2kV Isolated Repeater

SPECIFICATIONS

RS-232	
Connector	Terminal Block
Signals	4 signal lines in each direction. Protected ground on isolated side.
ISOLATION	
Method	Optical
Rating	2,000 V
POWER	
Connector	Terminal block
Voltage	10 to 30 VDC
Power Consumption	1.2 W
Source	External
TERMINAL BLOCKS	
Wire Size	24 to 14 AWG
Torque	4 kgf-cm
LED INDICATORS	
DATA LEDs (RED)	Data LED for each side of isolator Flashes when data transmitted
Power LED (RED)	ON when power applied
ENCLOSURE	
Material	Plastic
IP Rating	30
Dimensions	2.5 x 7.9 x 9.5 cm (1.0 x 3.1 x 3.7 in)
Mounting	35 mm DIN (panel mount adapter available)
ENVIRONMENTAL	
Operating Temperature	-40 to 80 °C (-40 to 176 °F)
Storage Temperature	-40 to 85 °C (-40 to 185 °F)
Operating Humidity	0 to 95% Non-condensing
MTBF	244689 hours
MTBF Calculation Method	MIL217F Parts Count Reliability
REGULATORY	
Approvals	CE, FCC, NEMA TS2 cULus Recognized, File E222870


ACCESSORIES

MDR-20-24 - DIN rail mount power supply 24VDC, 1.0 A output power

MDR-40-24 - DIN rail mount power supply 24VDC, 1.7 A output power

DRPM25 - 35mm DIN rail to Panel Mount Bracket, 25mm wide

EK-CLIP-MPC - DIN rail clip for enclosure

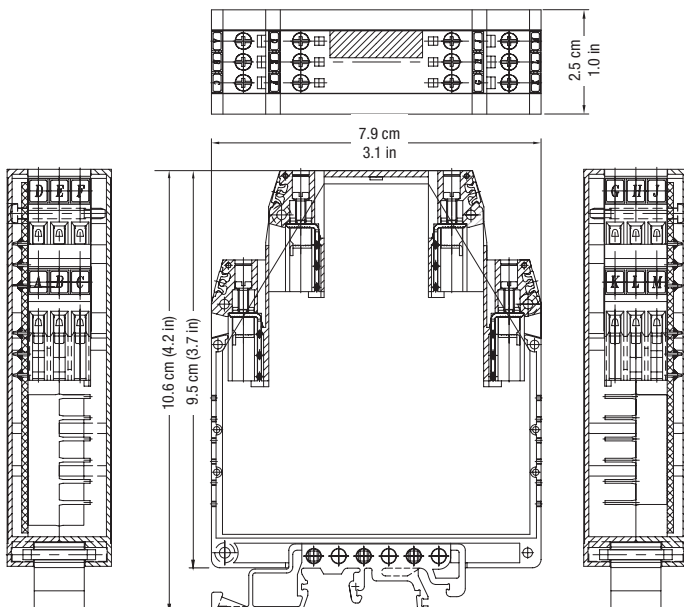

All product specifications are subject to change without notice.
2320PDR_4216ds