



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Heavy Industrial RS-232 Isolated Repeater

## 2320PDRI-PH

**B+B SMARTWORX**

Powered by

**ADVANTECH**

[www.advantech-bb.com](http://www.advantech-bb.com)



### PRODUCT FEATURES

- IEEE-61850-3, IEEE-1613
- NEMA TS2
- -40 to 85°C Operating Temperature
- Rugged IP30 Metal Panel Mount Case
- 50G Shock, 4G Vibration
- 2kV Triple Isolation
- 10 to 48 VDC Input Power

The 2320PDRI-PH is our premium Heavy Industrial RS-232 Isolated Repeater. Designed for rugged industrial environments, it has been put through some of the most exacting compliance tests in the industry. Meeting the requirements of IEC 61850-3 and IEEE 1613, it is suitable for installation in electrical substations. These specifications are more stringent than the NEMA TS1/TS2 requirements for transportation applications. Powerful isolation on both data ports protects your equipment and data from damaging ground loops and surges. Additional isolation on the power supply circuits adds a third degree of protection.

Packaged in a rugged IP30 metal case, this repeater operates in wide temperature extremes. The panel mount form factor with DIN Rail mount option makes it easy to integrate into your control panel or other industrial equipment.

Installation and configuration is easy. Data is connected with a DB9 female connector (DCE) and a DB9 male connector (DTE). Power is connected through terminal block that accepts 10 to 48 VDC from any external source.

### ORDERING INFORMATION


MODEL NUMBER	DESCRIPTION
2320PDRI-PH	Heavy Industrial RS-232 Isolated Repeater

### ACCESSORIES

**MDR-40-24** - DIN Rail Mount Power Supply 24VDC, 1.7 A output power

**DRAD35** - DIN Rail Mounting Kit 35mm

**TBKT1** - Replacement Term Block, 2

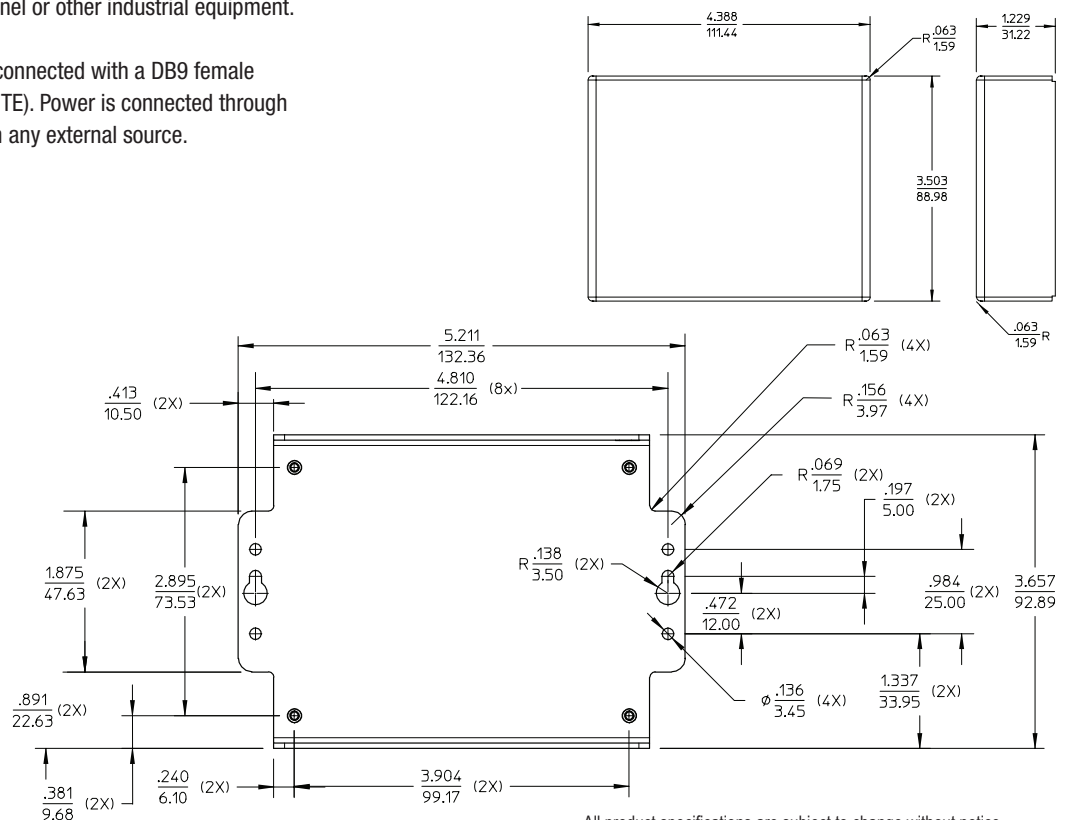

All product specifications are subject to change without notice.  
2320PDRI-PH\_3016ds



# Heavy Industrial RS-232 Isolated Repeater

232OPDRI-PH



## SPECIFICATIONS

SERIAL TECHNOLOGY	
Serial Connector	DB9 F (DCE), DB9 M (DTE)
Data Rate	Up to 115.2 Kbps
Isolation	2 kV RMS, 1 minute
POWER	
Source	External (Not Included)
Power Connector	2 Position Removable Terminal Block
Input Voltage	10 to 48 VDC (56 VDC Maximum)
Power Consumption	0.55 W (typical), 1.5 W (maximum)
TERMINAL BLOCKS	
Wire Size Accepted	28 to 12 AWG
Pitch	5.08 mm
Insulation Resistance	≥500 MΩ @ 500 VDC
Maximum Torque	5 Kg / cm
INDICATORS	
Power	Red LED
Data	Green LED TD, RD, CTS, RTS

MECHANICAL	
Dimensions	13.24 x 9.29 x 3.30 cm 5.2 x 3.7 x 1.3 in
Enclosure	IP30 Metal, Panel Mount
Weight	0.46 lbs (208.65 grams)
MTBF	194712 Hours
MTBF Calc. Method	Parts Count Reliability Prediction
ENVIRONMENTAL	
Operating Temperature	-40 to 85°C (-40 to 176°F)
Storage Temperature	-40 to 85°C (-40 to 176°F)
Operating Humidity	0 to 95% Non-condensing
REGULATORY	
Approvals	FCC, CE, IEC 61850-3, IEEE 1613 UL C1 D2, File: E245458, NEMA TS2

IEC 61850-3 ELECTRO MAGNETIC INTERFERENCE SPECIFICATIONS				
Test	Description		Test Level	Level
61000-4-2	ESD	Enclosure Contact Enclosure Air	8 kV 15 kV	4 4
61000-4-3	Radiated RFI	Enclosure Ports	10 V/m	3
61000-4-4	Burst (Fast Transient)	Signal Ports DC Power Ports	4 kV @ 2.5 KHz 4 kV	- 4
61000-4-5	Surge	Signal Ports DC Power Ports	2 kV line to earth, 1 kV line to line 2 kV line to earth, 1 kV line to line	4 3
61000-4-6	Induced (Conductive) RFI	Signal Ports DC Power Ports	10 V RMS 10 V RMS	3 3
61000-4-12	Damped Oscillatory	Signal Ports DC Power Ports	2.5 kV common, 1 kV diff mode @ 1MHz 2.5 kV common, 1 kV diff mode @ 1MHz	3 3
61000-4-16	Mains Frequency Voltage	Signal Ports DC Power Ports	30 V Continuous, 300 V for 1 s 30 V Continuous, 300 V for 1 s	4 4
61000-4-17	Ripple on DC Power Supply	DC Power Ports	10%	3
IEEE 1613 C37.90 ELECTROMAGNETIC INTERFERENCE SPECIFICATIONS				
C37.90.3	ESD	Enclosure Contact Enclosure Air	8 kV 15 kV	-
C37.90.2	Radiated RFI	Enclosure Ports	10 v/m	-
C37.90.1	Fast Transient	Signal Ports DC Power Ports	4 kV @ 2.5 kHz 4 kV	-
ENVIRONMENTAL SPECIFICATIONS				
60068-2-1	Cold Temperature	Test Ad	(-40 C, 16 Hours	-
60068-2-2	Dry Heat	Test Bd	(+85 C, 16 Hours	-
60068-2-30	Humidity (damp heat cycle)	Test Dd	90% (non-condensing) (+)55C, 6 Cycles	-
IEC 60068-2-6	Vibration	Test Fc	4g	Class 2
IEC 60068-2-27	Shock	Test Ea	50g	Class 2
IEC 60068-2-32	Drop	-	6 faces, 1 corner, 3 edges, total 10 drops at 1 m	-