



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TTL to RS-422 Converter

Model 422TTL

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- Convert 2 channels in each direction from TTL (“Transistor Transistor Logic”) to RS-422
- 5V TTL
- Baud rates up to 115.2 kbps
- Open pads to change pin configuration

Model 422TTL converts RS-422 or EIA-530 signals to 5V TTL at data rates up to 115.2 kbps. Two channels are used to convert RS-422 to TTL and two channels are used to convert TTL to RS-422.

A DB25 male connector is used on the TTL side and a DB25 female connector is used on the RS-422/EIA-530 side. The converter supports RD, TD, RTS, and CTS. Pin 7 is signal ground for both connectors.

The converter supports baud rates up to 115.2 kbps. Open pads are provided for each line. If desired, you can change the pin connectors for any of the 4 channels. When converting a second RS-422 channel, use the corresponding RTS A and RTS B pins (refer to the Quick Start Guide).

The converter inverts the TTL signal. Refer to the specifications table to determine polarity. An external +12 VDC power supply is required (not included).

ORDERING INFORMATION

MODEL NUMBER	RS-422 CONNECTOR	TTL CONNECTOR	TTL VDC	POWER SUPPLY REQUIRED
422TTL	DB25 Female	DB25 Male	5V	✓


ACCESSORIES

SMI6-12-V-P230-C1 - Power Supply, 12 VDC 6 Watt, 2.5MM Plug, International AC Input, International AC Blades


232CAMS - DB25 male to DB9 female adapter cable, 15.24 cm (6 in)

MECHANICAL DIAGRAM

Units - cm/in

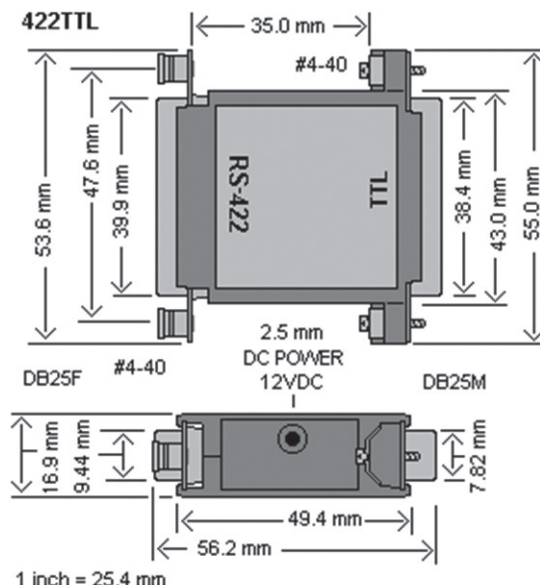

PINOUTS

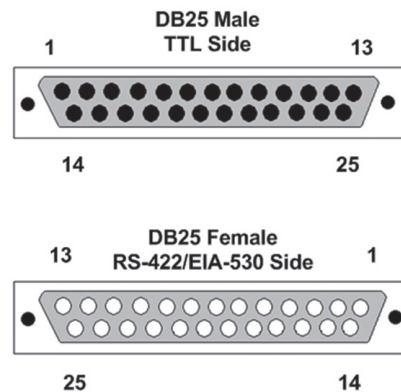

All product specifications are subject to change without notice.
422TTL_3217ds

TTL to RS-422 Converter

Model 422TTL



SPECIFICATIONS

SERIAL TECHNOLOGY	
Data Rate	115.2 kbps maximum
RS-422	
Connector	DB25 female
Signals	TDA(-), TDB(+), RDA(-), RDB(+), RTS A(-), RTS B(+), (EIA-530 pinout) CTS A(-), CTS B(+)
TTL	
Connector	DB25 male
Signals	TD, RD, RTS, CTS
VDC Level	5 V
POLARITY (VOLTS)	
TTL Input	V(A) - V(B)
High	Negative
Low	Positive
TTL Output	RS-422 / EIA-530 Input
High	Negative
Low	Positive
POWER	
Source	External (2.5 mm positive tip)
Input Voltage	12 VDC (<100 mA)

MECHANICAL	
Dimensions	5.4 x 5.1 x 1.6 cm (2.1 x 2.02 x 0.62 in)
MEANTIME BEFORE FAILURE (MTBF)	
MTBF	1539882 hours
MTBF Calc. Method,	Parts Count Reliability Prediction
ENVIRONMENTAL	
Operating Temperature	0 to +70 °C (+32 to +158 °F)
Storage Temperature	-40 to +85 °C (-40 to +185 °F)
APPROVALS / CERTIFICATIONS	
FCC Part 15, CISPR, EN 55022 +AC Class A Emissions	
CE	
EN 61000-6-1 Generic Standards for Residential, Commercial, Light-Industrial Environments	
EN 61000-4-2 Electro-Static Discharge (ESD)	
EN 61000-4-3 +A1 +A2 +IS1 Radiated Field Immunity (RFI)	
EN 61000-4-4 Electrical Fast Transients-Burst Immunity (EFT)	
EN 61000-4-6 Conducted Immunity	

SCHEMATIC

