



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1000 Mbps, Compact, 3-port Media Converter

Giga-McBasic-II

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- Two 10/100/1000 Mbps copper ports
- One SFP port or fixed fiber port (available in SM or MM)
- Compact, rugged device with internal AC power supply
- Easy to install, unmanaged device
- Supports Link Fault Pass-Through
- Auto-negotiation, Auto-cross
- DIN Rail or Wall Mount (with optional bracket)

The Giga-McBasic-II is a low-cost, compact, multi-port media converter that supports gigabit speed. Utilizing flexibility and compact size, interior private network applications can further benefit from the ever-expanding versatility of the McBasic product line.

This versatile converter features two 10/100/1000Mbps copper UTP ports and one fiber port, which is available in an SFP form factor, as well as for fixed fiber in single mode, multi mode and single strand fiber.

All models support gigabit speed; the SFP port allows 100 Mbps or Gigabit SFPs. A compact stand-alone device with internal AC power supply, it is completely a PNP device; no management is available.


A troubleshooting feature, Link Fault Pass-Through (LFPT) allows network operators to determine a fault condition on the interfaces. LFPT can be enabled via a dip switch on the front of the unit.

ORDERING INFORMATION

MODEL NUMBER	FIBER TYPE	FIBER PORTS	RANGE	ETHERNET PORT
Giga-McBasic-II				
856-30600	TX/SFP (requires one IE-SFP1250 Module)	1	Variable (SFP)	(2) RJ-45
856-30601	TX/SX-MM850-SC	1	220/550 m	(2) RJ-45
856-30602	TX/LX-MM1300-SC	1	2 km	(2) RJ-45
856-30603	TX/LX-SM1310-SC	1	10 km	(2) RJ-45
856-30604	TX/LX-SM1310/PLUS-SC	1	40 km	(2) RJ-45
856-30605	TX/LX-SM1550/LONG-SC	1	80 km	(2) RJ-45
856-30606	TX/LX-SM1550/XLONG-SC	1	100 km	(2) RJ-45
Single-Strand Fiber				
856-30620	TX/SSLX-SM1310-SC (1310xmt/1550rcv)	1	15 km	(2) RJ-45
856-30621	TX/SSLX-SM1550-SC (1550xmt/1310rcv)	1	15 km	(2) RJ-45
856-30625	TX/SSFx-SM1550-SC (1550xmt/1310rcv)	1	40 km	(2) RJ-45
856-30626	TX/SSFx-SM1310/PLUS-SC (1310xmt/1550rcv)	1	30 km	(2) RJ-45

MECHANICAL DIAGRAM

- dimensions in inches (cm)

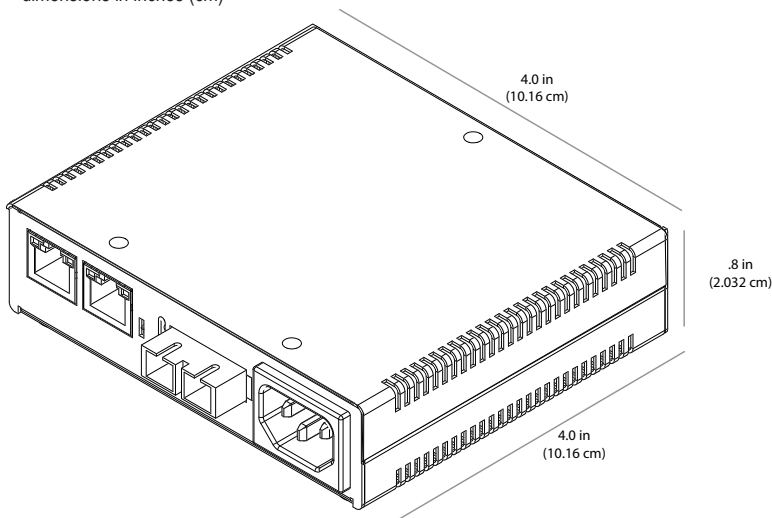

SPECIFICATIONS

MECHANICAL	
Connectors	RJ-45, SFP or fixed fiber
Dimensions	0.80H x 4.0W x 4.0D inches (2.032H x 10.16W x 10.16D cm)
Shipping Weight	0.7 lbs (0.3 kg)
POWER RATING	
100-240V AC, 50-60 Hz, 7W maximum working power	
ENVIRONMENTAL	
Operating Temperature	+14° to +122°F (-10° to +50° C)
Storage Temperature	-31° to +167°F (-35° to +75° C)
Operating Humidity	5 to 95% (non-condensing)
Altitude	0 to 10,000 ft.
REGULATORY APPROVALS	
FCC Class A	
UL/cUL, CSA, CE	
MEANTIME BEFORE FAILURE (MTBF)	
MTBF	1.8 million hours

All product specifications are subject to change without notice.
Giga-McBasic-II_2917ds