



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Modular, Managed Four T1 Plus Data Extension Over Fiber


IE-iMcV-T1-Mux/4+Ethernet

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com

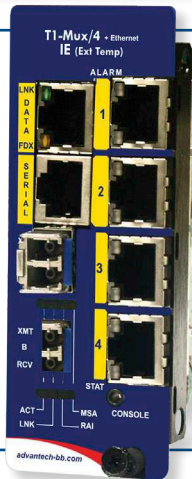

PRODUCT FEATURES

- Four independent T1 ports on RJ-48 connectors
- T1 ports can be remotely disabled by user
- AIS generation on signal loss on all T1 and fiber interfaces
- Supports local and remote loopback functions
- One full bandwidth, 10/100BaseT Ethernet port
- Auto Negotiation or forced modes on the Ethernet port
- Supports Jumbo Ethernet frames to 1916 on the Ethernet port
- User defined bandwidth limiting on Ethernet port
- Supports the Link Fault Pass-Through Function (LFPT) on the Ethernet port
- Dual SFP fiber ports with 1+1 protection switching
- B8ZS or AMI T1 line code (T1 ports)

The IE-iMcV-T1-Mux/4 is a managed modular media converter, installed as a Host/Remote pair, that transports four independent T1 lines over a single or dual fiber optic line. The module is ideal for applications requiring TDM extension, such as remote office PABX connectivity, with support for a full bandwidth 10/100BaseT Ethernet connection over the same optical link.

The iMcV-T1-Mux/4 detects, Ethernet, T1 and fiber LOS events as well as degraded lines with full LED indications including a Remote Alarm Indicator (RAI) over the fiber link.

Fiber redundancy (1+1) on removable SFP modules offers the enhanced reliability of a protected fiber link while supporting the complete range of optical types and distances. The 1+1 protection system automatically switches to the best fiber line within 50 milliseconds, should one line become impaired or fail.

The IE-iMcV-T1-Mux/4 features an independent serial link (RS-232) which is carried over the same fiber link(s), and can be used for transporting serial traffic from other equipment located at the remote point of presence (POP) back to the central office. The RS-232 console port is useful for local monitoring and configuration of the unit by technical support personnel.

ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	T1 PORTS DTE, 120 Ω	ETHERNET PORT	RS-232	RS-232 MINIJACK
IE-iMcV-T1-Mux/4 + Ethernet							
857-18110	SFP*	1 or 2	Various	4 - RJ48	1 - RJ48	1 - RJ45	1

* Not compatible with B+B Smartworx 100 Mbps Models SFP 808-381xx.

ACCESSORIES

825-39951 - Serial Cable, MiniJack to DB9 (female)



iView: Websver Version
Free Download

All product specifications are subject to change without notice.

IE-iMcV-T1-Mux/4+Ethernet_2817ds

B+B SMARTWORX

Powered by

ADVANTECH

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445

Modular, Managed Four T1 Plus Data Extension Over Fiber

IE-iMcV-T1-Mux/4+Ethernet



SPECIFICATIONS

TECHNICAL

Configured as Host/ Remote pairs (DIP Switch selection)	
RoHS-Compliant	
Double-wide module for iMediaChassis, MediaChassis and IE-MediaChassis chassis (2 slots required)	
SNMP management via the GUI-based iView2 application software	
Last Gasp Trap	
Local RS-232 Console port	
10/100BaseT Full Bandwidth (144,800 fps/FDX)	
Two MSA compliant optical SFP slots	
Four T1 copper ports	
RS-232 (Transparent to 125 Kbps)	
MEANTIME BEFORE FAILURE (MTBF)	
MTBF	732,333 hours

MECHANICAL

Dimensions	Double-wide chassis module
Shipping Weight	1.1 lbs. (0.50 kg)

POWER RATING

4.2W Typical 5.5W Max

ENVIRONMENTAL

Operating Temperature:	32° to 160°F (0° to +70°C)
Storage Temperature:	-40° to +160°F (-40° to +70°C)
Operating Humidity	5% to 95% (non-condensing), 0 – 10,000 ft. altitude

REGULATORY APPROVALS

FCC Class B

CE

IEEE-802.3u

ITU-T G.703 (Pulse Shape)

ITU-T G.824 (Jitter)

ITU-T-G.775 (AIS, LOS)

MECHANICAL DIAGRAM

(dimensions in inches)

