



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Modular, Managed Four E1 Plus Data Extension Over Fiber


IE-iMcV-E1-Mux/4+Ethernet (Enhanced)

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com

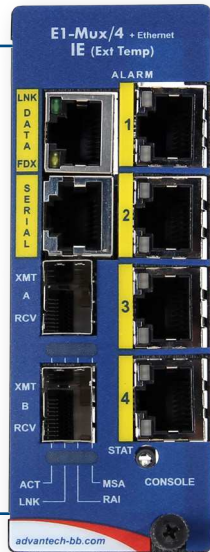

PRODUCT FEATURES

- Four independent E1 ports on RJ-48 connectors with surge protection
- AIS generation on signal loss on all E1 and fiber interfaces
- Supports local and remote loopback functions
- Supports the Link Fault Pass-Through Function (LFPT)
- Dual SFP fiber ports with 1+1 protection switching
- One RS-232 interface to support low speed data up to 120 kbps via MiniJack adapter
- Both Host/Remote are managed from the Host unit
- Command Line Interface (CLI) management provided via one MiniJack RS-232 console port
- Remote Graphical User Interface (GUI) management through a managed iMediaChassis
- SNMP Alarm TRAP reporting in managed chassis, including Last Gasp
- Full LED diagnostics on front panel

The IE-iMcV-E1-Mux/4 is a managed modular media converter, installed as a Host/Remote pair, that transports four independent E1 lines over a single or dual fiber optic line plus one 10/100 ethernet port. The module is ideal for applications requiring TDM extension, such as remote office PABX connectivity, with support for a full bandwidth 10/100BaseT Ethernet connection over the same optical link.

The IE-iMcV-E1-Mux/4 allows for Bandwidth Limiting control in 32 Kbps increments up to 100 Mbps. It also detects Ethernet, AIS, E1 and fiber LOS events as well as degraded lines with full LED indications including a Remote Alarm Indicator (RAI) over the fiber link. E1 ports can also be enabled or disabled via the CLI, Telnet or SNMP management software, allowing the user to perform maintenance on a particular line without affecting others.

Fiber redundancy (1+1) on removable SFP modules offers the enhanced reliability of a protected fiber link while supporting the complete range of optical types and distances. The 1+1 protection system automatically switches to the best fiber line within 50 milliseconds, should one line become impaired or fail.

The module also features an independent serial link (RS-232) which is carried over the same fiber link(s), and can be used for transporting serial traffic from other equipment located at the remote point of presence (POP) back to the central office. The RS-232 console port is useful for local monitoring and configuration of the unit by technical support personnel.

ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET PORT	RS-232	RS-232 MINIJACK
iMcV-E1-Mux/4+Ethernet (Enhanced)							
857-18111	SFP*	1 or 2	Various	4 - RJ48	1 - RJ45	1 - RJ45	1

* Not compatible with B+B Smartworx 100 Mbps Models SFP 808-381xx.

ACCESSORIES

825-39951 - Serial Cable, MiniJack to DB9 (female)



iView: Webserver Version
Free Download

All product specifications are subject to change without notice.
IE-iMcV-E1-Mux/4+Ethernet Enhanced_2817ds

Modular, Managed Four E1 Plus Data Extension Over Fiber

IE-iMcV-E1-Mux/4+Ethernet (Enhanced)



SPECIFICATIONS

TECHNICAL	
2 x MSA compliant optical SFP slots	
4 x E1 (RJ-48) copper ports	
Local RS-232 Console port	
RS-232 transparent to 120 Kbps	
IEEE 802.3x Flow Control	
IEEE 802.3i 10Base-T twisted pair	
IEEE 802.3u 100Base-TX twisted pair	
IEEE 802.3u 100Base-FX or SX fiber	
ITU G.775	
GR-820-CORE	
Supports over-sized packets up to 1916 bytes per packet	
Configurable as Host/ Remote pairs (DIP Switch selection)	
SNMP management via GUI-based iView2 application software	
10/100BaseT Full Bandwidth (144,800 fps/FDX)	
RoHS compliant	

MECHANICAL	
Dimensions	Double-wide chassis module
Shipping Weight	1.1 lbs. (0.50 kg)
POWER CONSUMPTION	
0.96A @ +5 VDC	
ENVIRONMENTAL	
Operating Temperature	-40°F to 158°F (-40°C to +70°C)
Storage Temperature	-40°F to 158°F (-40°C to +70°C)
Operating Humidity	5% to 95% (non-condensing), 0 – 10,000 ft. altitude
REGULATORY APPROVALS	
IEEE-802.3u	
ITU G.775 (AIS, LOS)	
GR-820-CORE	
MEANTIME BEFORE FAILURE (MTBF)	
MTBF	112,300 hours

MECHANICAL DIAGRAM

(dimensions in inches)

