



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Heavy Industrial Serial to Fiber Optic Converters


Models FOSTCDRI-PH-MC, FOSTCDRI-PH-MT, FOSTCDRI-PH-SC

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com

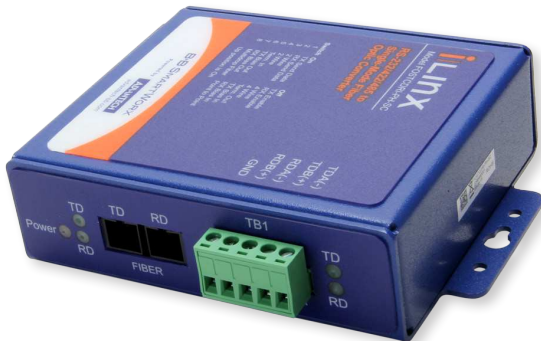

PRODUCT FEATURES

- IEEE-61850-3
- IEEE 1613
- NEMA TS2 (FOSTCDRI-PH-MT)
- Multi- or Single-Mode, ST or SC Versions
- -40 to 85°C Wide Operating Temperature
- Rugged, IP30 Metal Panel Mount Case
- 50G Shock, 4G Vibration
- 2kV Triple Isolation

The FOSTCDRI-PH-xx series are premium heavy industrial serial to fiber optic converters. Designed for rugged industrial environments, they have been put through most exacting compliance testing in the industry. Meeting IEC 61850-3 and IEEE 1613 requirements, they are suitable for installation in electrical substations. These specifications are more stringent than the NEMA TS1/TS2 requirements for transportation applications. Powerful isolation protects equipment and data from damaging ground loops and surges. Additional isolation on the power supply circuits adds a third degree of protection.

Packaged in a rugged IP30 metal case, these converters convert serial signals to multi-mode or single-mode fiber optic. Bit-wise enabled circuitry automatically detects the data rate without setting a DIP switch.

In addition to direct point-to-point connectivity, operation in multi-drop mode is possible. This enables serial devices to communicate with up to 31 others in a fiber ring. Supporting mixed standards, you can replace other converters and add the EMI / RFI protection inherent to fiber optic communications.

ORDERING INFORMATION


MODEL NUMBER	DESCRIPTION
FOSTCDRI-PH-MC	Serial to Multi-mode SC Converter
FOSTCDRI-PH-MT	Serial to Multi-mode ST Converter
FOSTCDRI-PH-SC	Serial to Single-mode SC Converter

ACCESSORIES

MDR-20-24 - DIN Rail Mount Power Supply 24VDC, 1.0 A output power

DRAD35 - DIN Rail Mounting Kit 35mm

MECHANICAL

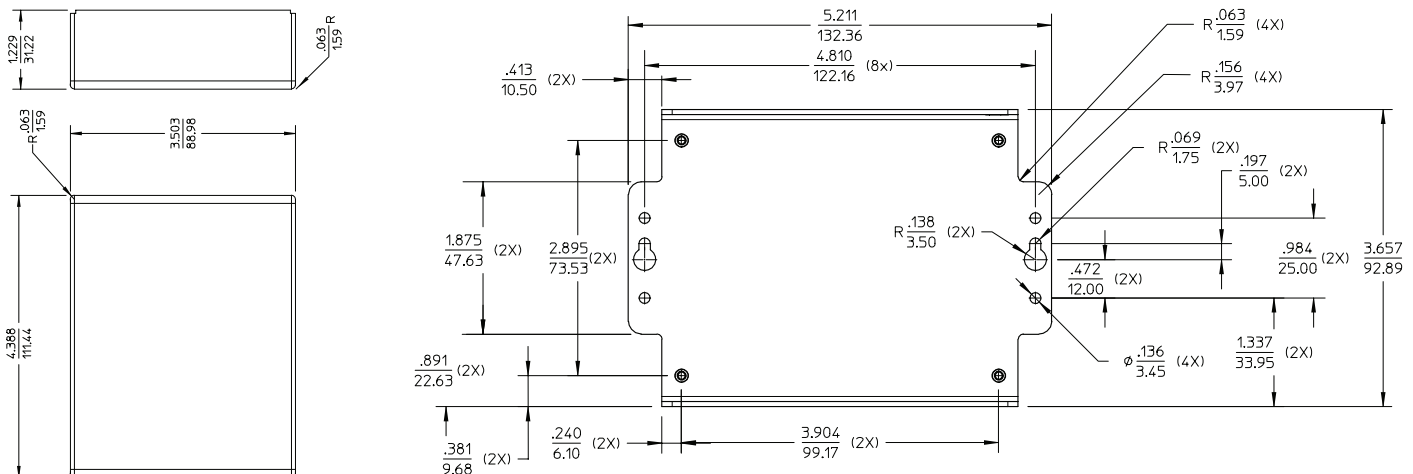

All product specifications are subject to change without notice.
FOSTCDRI-PH-MC, FOSTCDRI-PH-MT, FOSTCDRI-PH-SC_3017ds

Heavy Industrial Serial to Fiber Optic Converters

Models FOSTCDRI-PH-MC, FOSTCDRI-PH-MT, FOSTCDRI-PH-SC



SPECIFICATIONS

SERIAL TECHNOLOGY	
RS-232	TD, RD, GND
RS-422	TDA(-), TDB(+), RDA(-), RDB(+)
RS-485 4-Wire	TDA(-), TDB(+), RDA(-), RDB(+)
RS-485 2-Wire	Data A(-), Data B(+)
Serial Connector	5-position, removable terminal block
Data Rate	9.6 to 115.2 Kbps
Isolation	2 KV RMS, 1 minute
Surge Protection	600 W peak power dissipation Clamping time < 1 pico-second
Industrial Bus	Modbus ASCII / RTU
Bias	Built-in, switchable 1.2K Ω XMT/RCV
Termination	Built-in, switchable 120 Ω
FIBER OPTIC TECHNOLOGY	
Type / Wavelength	Multi-mode or Single-mode 1310 nM
Output Power (MM)	-19 (min), -14 (max) dBm
Output Power (SM)	-15 (min), -8 (max) dBm
RCV Sensitivity	\leq -32 dBm
Cable	62.5 / 125 μ M (MM), 9 / 125 μ M (SM)
Data Rate	9.6 to 115.2 kbps
Distance	Multi-mode: 2 KM (1.25 mi) Single-mode: 15 KM (9.3 mi)
Fiber Light	Modulated
POWER	
Source	External
Power Connector	2-position, removable terminal block
Input Voltage	10 to 48 VDC (56 VDC maximum)
Power Consumption	0.9 W typical (2.6W with termination)

TERMINAL BLOCKS	
Wire Size Accepted	28 to 12 AWG, copper wire only
Pitch	5.08 mm
Insulation Resistance	\geq 500 M Ω @ 500 VDC
Maximum Torque	5 Kg / cm
INDICATORS	
Power	Red LED
TD / RD (Each Port)	Green LED
MECHANICAL	
Dimensions	13.24 x 9.29 x 3.0 cm (5.2 x 3.7 x 1.3 in)
Enclosure	IP30 metal, panel mount
Weight	0.46 lbs (208.65 grams)
MTBF	127,103 hours
MTBF Calc. Method	Parts Count Reliability Prediction
ENVIRONMENTAL	
Operating Temperature	-40 to 85 $^{\circ}$ C (-40 to 176 $^{\circ}$ F)
Storage Temperature	-40 to 85 $^{\circ}$ C (-40 to 176 $^{\circ}$ F)
Operating Humidity	0 to 95% Non-condensing
REGULATORY	
Approvals	FCC, CE, IEC 61850-3, IEEE 1613 UL C1 D2, File: E245458 NEMA TS2 (Model FOSTCDRI-PH-MT)

IEC 61850-3 ELECTRO MAGNETIC INTERFERENCE SPECIFICATIONS

Test	Description		Test Level	Level
61000-4-2	ESD	Enclosure Contact	8 kV	4
		Enclosure Air	15 kV	4
61000-4-3	Radiated RFI	Enclosure Ports	10 V/m	3
61000-4-4	Burst (Fast Transient)	Signal Ports	4 kV @ 2.5 KHz	-
		DC Power Ports	4 kV	4
61000-4-5	Surge	Signal Ports	2 kV line to earth, 1 kV line to line	4
		DC Power Ports	2 kV line to earth, 1 kV line to line	3
61000-4-6	Induced (Conductive) RFI	Signal Ports	10 V RMS	3
		DC Power Ports	10 V RMS	3
61000-4-12	Damped Oscillatory	Signal Ports	2.5 kV common, 1 kV diff mode @ 1MHz	3
		DC Power Ports	2.5 kV common, 1 kV diff mode @ 1MHz	3
61000-4-16	Mains Frequency Voltage	Signal Ports	30 V Continuous, 300 V for 1 s	4
		DC Power Ports	30 V Continuous, 300 V for 1 s	4
61000-4-17	Ripple on DC Power Supply	DC Power Ports	10%	3

IEEE 1613 C37.90 ELECTROMAGNETIC INTERFERENCE SPECIFICATIONS

C37.90.3	ESD	Enclosure Contact	8 kV	-
		Enclosure Air	15 kV	-
C37.90.2	Radiated RFI	Enclosure Ports	10 v/m	-
C37.90.1	Fast Transient	Signal Ports	4 kV @ 2.5 kHz	-
		DC Power Ports	4 kV	-

ENVIRONMENTAL SPECIFICATIONS

60068-2-1	Cold Temperature	Test Ad	-40 $^{\circ}$ C, 16 Hours	-
60068-2-2	Dry Heat	Test Bd	+85 $^{\circ}$ C, 16 Hours	-
60068-2-30	Humidity (damp heat cycle)	Test Dd	90% (non-condensing) +55 $^{\circ}$ C, 6 Cycles	-
IEC 600068-2-6	Vibration	Test Fc	4g	Class 2
IEC 600068-2-27	Shock	Test Ea	50g	Class 2
IEC 60068-2-32	Drop	-	6 faces, 3 edges, 1 corner, total 10 drops at 1 m	-