



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Serial to Single-mode Fiber Optic Converters

Models FOSTCDRI-ST, FOSTCDRI-SC

**B+B SMARTWORX**

Powered by

**ADVANTECH**

[www.advantech-bb.com](http://www.advantech-bb.com)



## PRODUCT FEATURES

- Data rates up to 115.2 kbps
- 15 km (9 mi) range
- 10 to 48 VDC power input
- Wide operating temperature
- 2000 Volts isolation
- Modbus ASCII / RTU compatible
- EMI / RFI protection

## ORDERING INFORMATION

MODEL NUMBER	SERIAL CONNECTOR	FIBER CONNECTOR	MODBUS
FOSTCDRI-SC	Terminal Blocks, removable	Single-mode SC	✓
FOSTCDRI-ST	Terminal Blocks, removable	Single-mode ST	✓

## ACCESSORIES

**MDR-20-24** - 24 VDC @ 1.0 A DIN rail mount power supply, slim-line

**TBKT1** - Replacement Terminal Block, 2-position, 5.08 mm

**TBKT2** - Replacement Terminal Block, 5-position, 5.08 mm

Advantech B+B SmartWorx' ILinx™ fiber converters are designed with functionality required for heavier industrial environments. Model FOSTCDRI-Sx industrial-grade isolated converter changes RS-232, RS-422 or RS-485 to single-mode fiber optics.

FOSTCDRI-Sx extends serial data ranges up to 15 km (9 mi) and provides the most versatile connection possible between asynchronous full or half-duplex serial equipment. In addition to direct point-to-point connectivity, it is capable operating in a multi-drop mode. This allows one serial device to communicate with up to 31 others around a fiber optic ring. Since it supports mixed serial standards, it can replace other converters and isolators and add the EMI/RFI immunity inherent to fiber optic communications. Fiber optic connectors are SC or ST.

Automatic Send Data Control circuit controls the RS-422/485 driver chip, eliminating the requirement for special software. Easy to install and configure, it has a 12-position DIP switch to set up the RS-422/485 parameters and removable terminal blocks to connect serial signals and power. In RS-232 mode, it supports Transmit Data and Receive Data. Handshaking signals are not passed through.


## Fiber Optic Benefits

Fiber optic cable carries serial data up to 15 kilometers (9 miles), much farther and reliably than conventional copper lines.

Power surges, spikes and ground loops are created by electrical equipment, by nearby lightning strikes, and from other sources. They are easily picked up by copper data lines and transmitted to connected devices, garbling data communications and damaging equipment.

However, fiber optic data transmission uses light in glass fiber cable as a communication medium. Being inherently non-electric, fiber optic cable will not pick up noise and provides the most reliable system possible – ideal for spanning areas with severe interference, such as near heavy electrical equipment, welding or radio transmissions. It does not transmit power spikes or surges and prevents ground loops by not providing a conductive path for the ground.

## MECHANICAL DIAGRAM - FOSTCDRI-SC

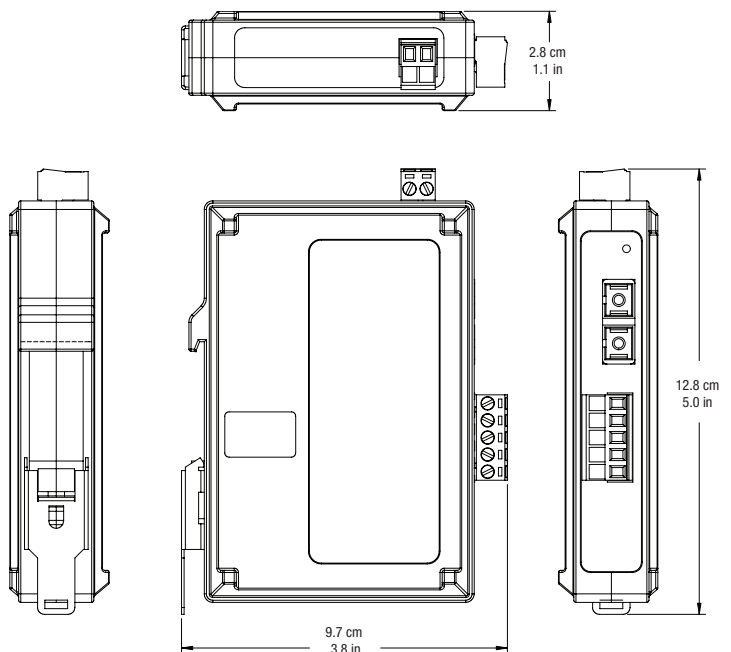

All product specifications are subject to change without notice.  
FOSTCDRI-ST, FOSTCDRI-SC\_3317ds

# Serial to Single-mode Fiber Optic Converters

Models FOSTCDRi-ST, FOSTCDRi-SC



## SPECIFICATIONS

SERIAL TECHNOLOGY	
Data Rate	9.6 to 115.2 kbps
<b>RS-232</b>	
Connector	Removable terminal block (12 to 28 AWG)
Signals	TD, RD, GND
<b>RS-422/485</b>	
Connector	Removable terminal block (12 to 28 AWG)
RS-485, 2-wire	Data A(-), Data B(+), GND
RS-422/485, 4-wire	TDA(-), TDB(+), RDA(-), RDB(+), GND
ISOLATION	
Isolation	3-way, 2KV isolation
Surge Protection	600 W peak power dissipation
Clamping Time	< 1 pico-second
FIBER OPTIC TECHNOLOGY	
Connector	ST or SC
Type / Wavelength	Single-mode / 1310 nm
Output Power	(-) 15 to (-) 8 dBm
Receive Sensitivity	Less than or equal to (-) 32 dBm
Cable	9/125 micro-meter
Data Rate	9.6 to 115.2 kbps
Maximum Distance	15 km (9 mi)
POWER	
Source	External
Input Voltage	10 to 48 VDC (Class 2)
Power Consumption	1.4 Watts
Connector	Removable terminal block (12 to 28 AWG)

INDUSTRIAL BUS	
Modbus	ASCII/RTU
MECHANICAL	
LED Indicators	FO Receive, FO Transmit, Power
Dimensions	12.8 x 9.7 x 2.8 cm (5.0 x 3.8 x 1.1 in)
Enclosure	IP30, Plastic, 35mm DIN mount
Weight	149.7 g (0.3 lbs)
ENVIRONMENTAL	
Operating Temperature	-40 to +80 °C (-40 to +176 °F)
Storage Temperature	-40 to +85 °C (-40 to +185 °F)
Operating Humidity	0 to 95% non-condensing
MTBF	671969 hours (FOSTCDRi-ST, FOSTCDRi-SC)
MTBF Calculation Method	MIL 217F Parts Count Reliability Prediction
APPROVALS / CERTIFICATIONS - FOSTCDRi-SC & FOSTCDRi-ST	
UL 508, File Number: E222870	
FCC Part 15, CISPR, EN 55022: 2010 + AC:2011 Class B Emissions	
CE	
2014/30/EC	Electromagnetic Compatibility Directive
2011/65/EU	Reduction of Hazardous Substances Directive (RoHS)
2012/19/EU	Waste electrical and electronic equipment (WEEE)
EN 55022:+AC	Information technology equipment - Class B RF Emissions
EN 61000-6-2	Generic immunity standard for (Heavy) industrial environments
EN 61000-4-2	ESD immunity
EN 61000-4-3:+A2	Radiated immunity
EN 61000-4-4	EFT/Burst immunity
EN 61000-4-5	Surge immunity
EN 61000-4-6	RF conducted immunity